



健隆投資有限公司
STRONG BASE INVESTMENT LTD.

Unit 17, 11/F., Hewlett Centre, 52-54 Hoi Yuen Road, Kwun Tong, Kowloon, Hong Kong.
Tel: (852) 2793 3293 Fax: (852) 2793 3096



Approval Sheet
(確認書)

編號 Ref. No.	150330-08
日期 Issued Date	205-3-30

公司名稱 :
Company Name _____

產品編號 : E1-4056CUG1
Part No. _____

產品種類 : 数码显示板
Category _____

產品描述 : 0.56Inch、超高亮黄绿光、四位、共阴、灰面白字
Description _____

客戶產品編號 :
Customer No. _____

備注 :
Remarks _____

STRONG BASE			
ISSUER	APPROVER	CHECKER	ENGINEER
	曾雪昭	王金龙	郭清莲

Authorized Signature 客戶簽字				
部門 Department				
簽字 Signature				

工廠名稱:宇之亮電子(深圳)有限公司

工廠地址:廣東省深圳市龍崗區橫崗鎮荷坳村金源工業區

Company Name: Pretty Light (Shen Zhen) Limited

Factory Address: jin-Yuan, Industrial Zone He-Ao Cun, Heng-Gang
Zhen Long-Gang Area, Shen-Zhen City,

TEL: (755) 8976 7353

FAX: (755) 89767754



健隆投資有限公司

STRONG BASE INVESTMENT LTD.

Unit 17, 11/F., Hewlett Centre, 52-54 Hoi Yuen Road, Kwun Tong, Kowloon, Hong Kong.

Tel: (852) 2793 3293

Fax: (852) 2793 3096



PART No: E1-4056CUG1

Client:

Single Chip Light Electricity Characteristic Data

※Absolute Maximum Ratings at Ta=25℃

Parameter	Rating	Unit
Power Dissipation Per Chip	50	mW
Perk Forward Current Per Chip (Frequency 10KHz, 1/10Duty Cycle)	60	mA
Reverse Voltage Per Chip	5	V
Operating Temperature Range	-20~+80	℃
Storage Temperature Range	-20~+85	℃
Storage Humidity	45% ~ 85%	

※Electrical and Optical Characteristics at Ta=25℃

Parameter	Symbol	Condition	Color	Min	Typ	Max	Unit
Forward Voltage Per Chip	VF	IF=20mA	Y-Green	1.8	2.0	2.5	v
Reverse Current	IR	VR=5V	-	-	-	50	uA
Luminous Intensity Per Chip	IV	IF=20mA	Y-Green	30	45	60	mcd
Dominant Wave Length	λ_d	IF=20mA	Y-Green	568	571	573	nm
Normal Forward Current	IF		All Color	5	10	20	mA

Note : Soldering Bath : not more than 4 seconds @260℃. The bottom ends of plastic reflector should be at least 2mm above the solder surface.

Soldering Iron : not more than 3 seconds @300℃ under 30W.



健隆投資有限公司

STRONG BASE INVESTMENT LTD.

Unit 17, 11/F., Hewlett Centre, 52-54 Hoi Yuen Road, Kwun Tong, Kowloon, Hong Kong.

Tel: (852) 2793 3293


Fax: (852) 2793 3096



PART No.: E1-4056CUG1

Client:

PACKAGE DIMENSION(Unit: mm Tolerance: ± 0.5)

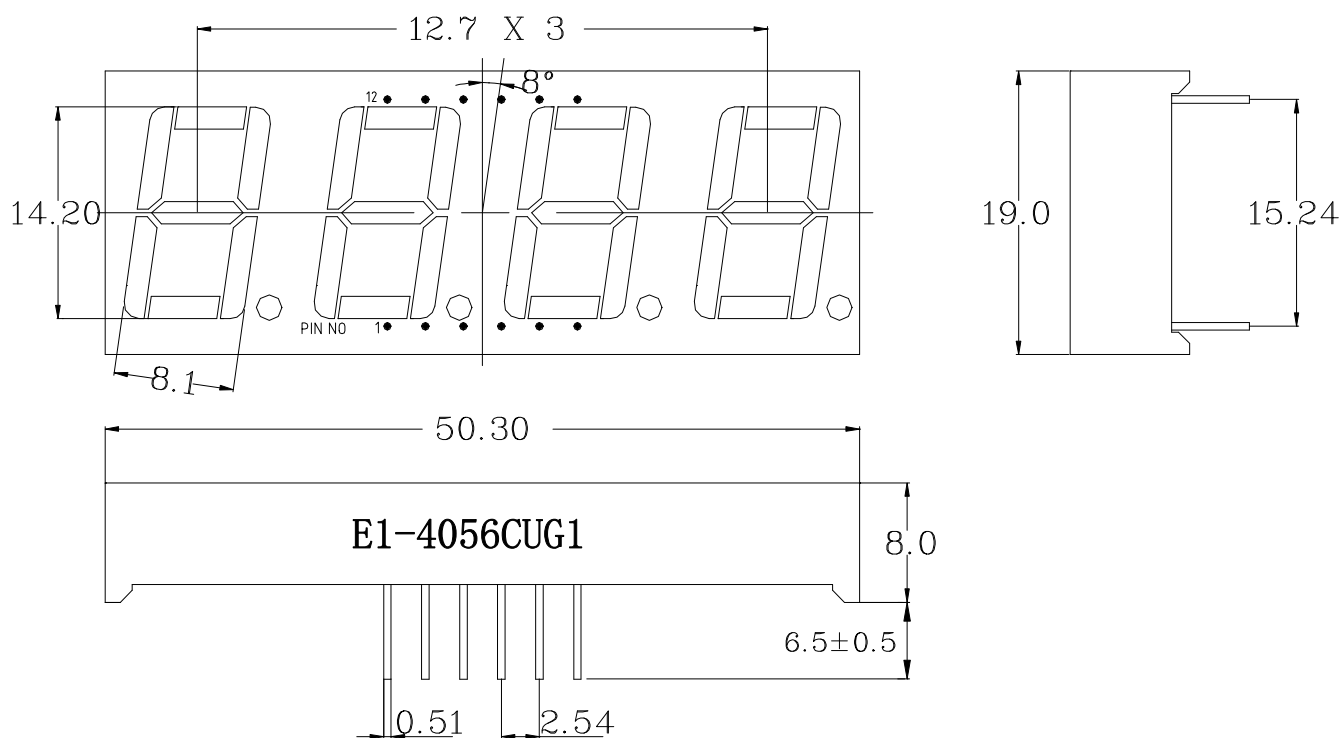

INTERNAL CIRCUIT DIAGRAM

Pin Function

