

TILT SENSOR SWITCH


Item No.	RBS100600	Description	Ball-Contact	Version	16
Page	1 of 6		Publish Date	Sep. 04, 2020	

● **FUNCTION**

25° Tilt Detecting for 4 Directions in horizontal position.

● **APPLICATIONS**

1. Wake up systems for power saving, such like remote controllers
2. Automatically shut off for home appliances
3. Automatically shut off for Sporting equipment
4. Alarm system
5. Anti-theft / Anti-tamper devices
6. Being motion detection (personal locator)

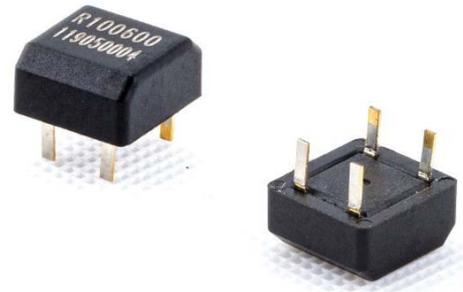

● **FEATURES**

1. Suitable for horizontal PCB.
2. Switch State : DIP Normal Open.
3. Small size & compact space.
4. Housing made of high insulation plastic material, free from electric conduction and rust problem.
5. Terminals and balls are gold plated to enhance the life.
6. All plastic material subject to industrial purpose meets high temperature and fireproof function.
7. Simple switch signal, easy for circuit design.
8. Comply with RoHS, complete replacement of mercury switch and meet environmental protection.
9. More economic than IC design.
10. All made in Taiwan and examined before shipment.



TILT SENSOR SWITCH

Item No.	RBS100600	Description	Ball-Contact	Version	16
Page	2 of 6		Publish Date	Sep. 04, 2020	

● **PATENTS**

1. Taiwan Patent No. I 239025
2. Taiwan Patent No. I 261280
3. Taiwan Patent No. M 455971
4. Taiwan Patent No. I 505313
5. U.S.A. Patent No. US 7,045,724 B1
6. U.S.A. Patent No. US 7,473,857 B2
7. U.S.A. Patent No. US 8,969,747 B2
8. China Patent No. CN 1779878 A
9. China Patent No. CN 101075510 A
10. China Patent No. CN 202977296 U
11. China Patent No. CN 103854918 A




TILT SENSOR SWITCH

Item No.	RBS100600	Description	Ball-Contact	Version	16
Page	3 of 6		Publish Date	Sep. 04, 2020	

● DIMENSIONS / OPERATION / P.C.B. LAYOUT (Unit: mm, Tolerance: ±0.25mm)

Fig. 1

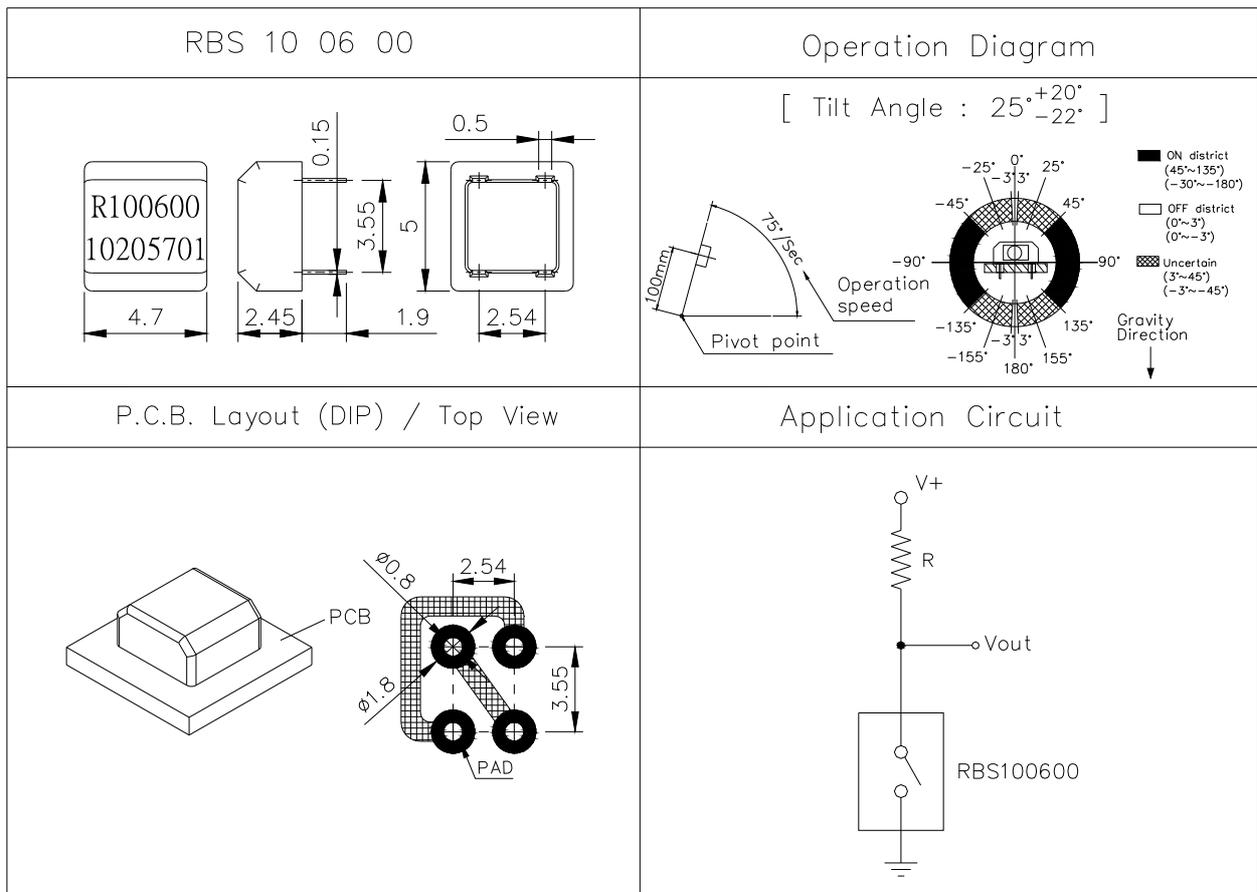

TILT SENSOR SWITCH

Item No.	RBS100600	Description	Ball-Contact	Version	16
Page	4 of 6		Publish Date	Sep. 04, 2020	

● Current/Voltage Suggested

Input Current	Minimum Operating Voltage	Condition
1.0 mA	3 V	--

● ELECTRICAL CHARACTERISTICS

1.	Maximum Contact Current	10 mA
2.	Contact Resistance	50 Ω max.
3.	Operation Diagram	Refer to Fig. 1
4.	Insulation Resistance	50 MΩ min. At 100 VDC
5.	Dielectric Strength	50 VDC min. For 1 minute
6.	Capacitance	5pF max
7.	Conductive Rate	85% min.

● RELIABLE TEST ITEMS

Reliable Test for RBS100600

	Test Item	Contents
1	Operating Temperature	-25°C ~ 85°C
2	Storage Temperature	-40°C ~ 85°C
3	Humidity	40 °C / 95 %RH
4	Mechanical Life	2 Hz horizontal 1,000,000 times
5	Electrical Life	100,000 times



TILT SENSOR SWITCH

Item No.	RBS100600	Description	Ball-Contact	Version	16
Page	5 of 6		Publish Date	Sep. 04, 2020	

● **SOLDERING CONDITION**

Following soldering conditions are for reference only, please use soldering information that solder paste manufacturer recommends.

Condition Suitable Production Process	Soldering Temperature	Soldering Time	Wattage of Manual Soldering	Type
Wave Soldering	260±5°C	< 5 seconds max.	-	DIP
Manual Soldering	300±5°C	< 3 seconds max.	30W or Temperature-controlled manual soldering	DIP

● **PACKAGE**

	Parts No.	Package	Quantity	Total	Dimension (mm)
1.	RBS100600	PE bag	1,000 pcs	1,000 pcs	205L*145W
		Inner box	10 PE bags	10,000 pcs	348L*191W*85H
		Carton	3 Boxes	30,000 pcs	364L*278W*213H

※ Package shown as below for reference.



PE Bag



Inner box



Carton



TILT SENSOR SWITCH

Item No.	RBS100600	Description	Ball-Contact	Version	16
Page	6 of 6		Publish Date	Sep. 04, 2020	

● NOTES

1. Suggestion for usage: For vibration usage or application, we suggest to add hysteresis for IC; if vibration is heavy, optical type of sensor switch is recommended.
2. For the continued product improvement as one of the company policy, specifications may change or update without notice. The latest information can be obtained through our sales offices. Normally, all products are supplied under our standard conditions.
3. If buyer's products will stay in power supply for a long time which needs very high stability, optical sensor switch is strongly recommended.

● PRECAUTIONS FOR USE

1. If the products are intended to be used for other endurance equipment requiring higher safety and reliability such as life support system, space and aviation devices, disaster and safety system, it's necessary to make verification of conformity or contact us for the details before using.
2. Don't try to clean the switch with a solvent or similar substance after the soldering process.
3. Use water-soluble flux may damage the switch.
4. Please follow the soldering instruction accordingly, otherwise might lead to defective.
5. Do not use switch in the environment of high humidity, because such an environment may cause the leakage current between the terminals.
6. Please do not exceed the rated load as there will be a risk of disabling the product function.
7. In the circuit, switch should not be near or directly connected with the magnetic component solder joints (for example: relays, transformers, etc.).

