


REV.	CHANGE CONTENT	BY	DATE
A	INITIAL DESIGN	HK	2019/12/07
B	Change The PIN Size From 2.0 To 1.0	HK	2020.03.05





## CIRCUIT DIAGRAM

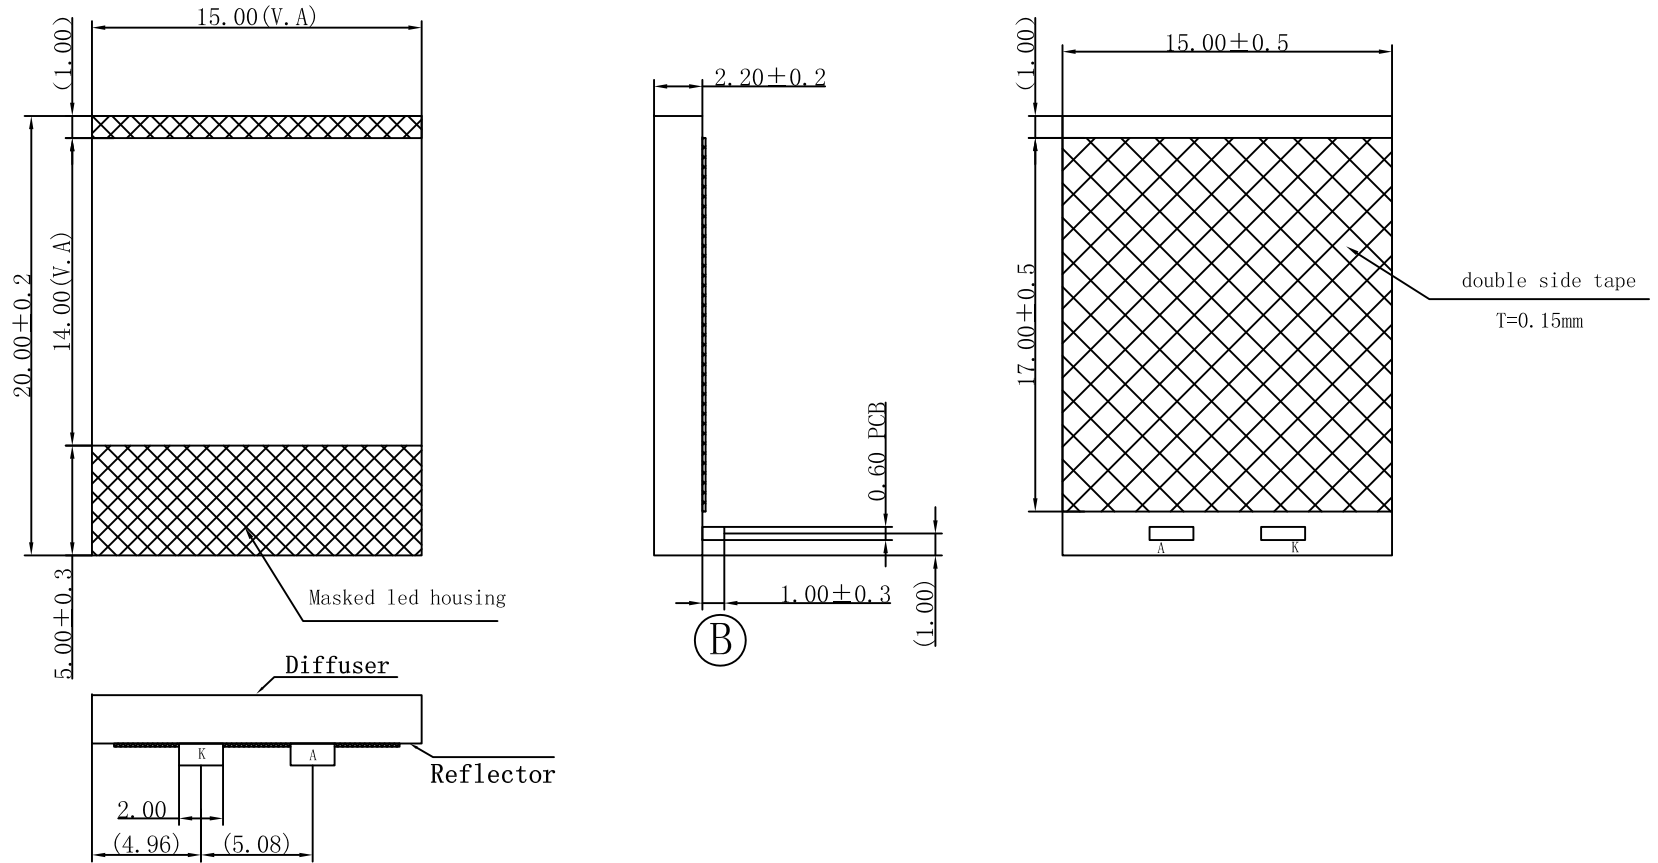

Backlight: 1 CHIP-BLUE LED

ALL UNMARKED TOLERANCE: ±0.2mm

Item	Symbol	MIN.	TYP.	MAX.	Unit	Condition
Forward Voltage	Vf	2.6	2.9	3.3	V	constand current If= 15mA
Peak Wavelength	-	465	470	475	-	
Colour Coordinate	-	-	-	-	um	
Luminance	Lv	-	-	-	cd/m <sup>2</sup>	
Uniformity	Avg	75	-	-	%	MIN/MAX*100%
Reverse Current	Ir	-	-	40	μA	Vr= 5 V
Operation Temperature	-	-20	-	70	°C	-
Storage Temperature	-	-30	-	80	°C	-

 HTDISPLAY Co., Ltd.			DRAWING No. : HS00D26-VA	
			DRAWING TITLE: BL	
			FILE NO. :	
DESIGN	HK	2020.03.05	REV. : A	SCALE : -
CHECKED	WS	2020.03.05	PROJECTION:	UNIT : MM
APPROVED	ZXY	2020.03.05		SHEET : 1/1