
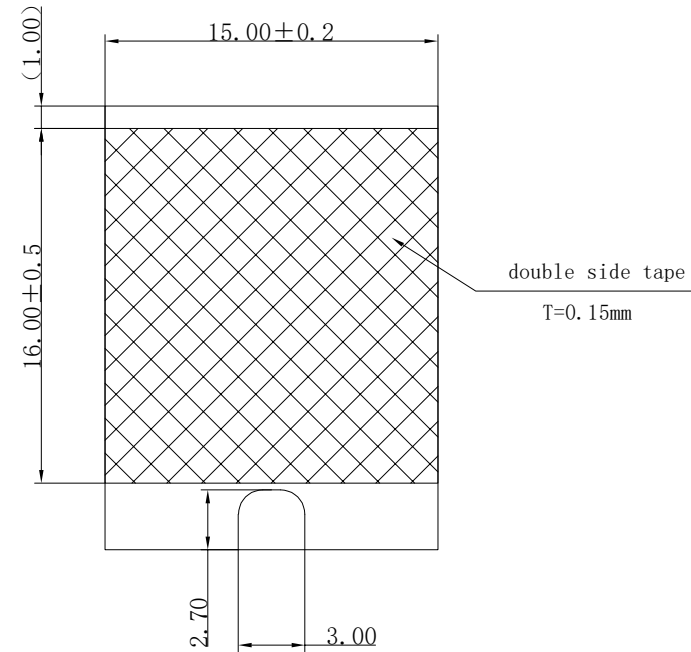


A	FIRST ISSUE	JZ	23.07.31
B	Light trough from 1.3mm to 2.7mm	JZ	23.08.04

1. Mechanical Outline (Unspecified Tolerances is $.^{xx} \pm 0.2$)

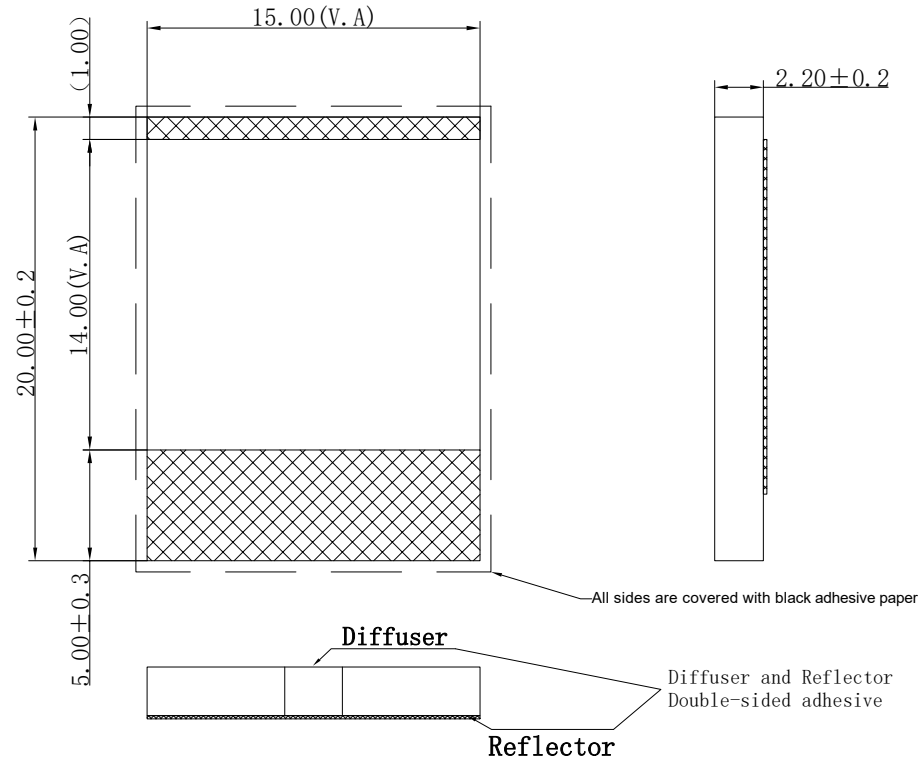

2. Electrical-Optical Characteristics (Ta=25° C)

	Item	Symbol	min.	typ.	max.	Unit	Condition
Main screen	Luminance	Lv				cd/m ²	If= - MA
	Uniformity	Avg	75			%	
	Dominant Wave Length	λp	-	-	-	nm	
Sub screen	Luminance	Lv	---			cd/m ²	
	Uniformity	Avg	---			%	
	Colour Coordinate	X	---		---		
	Y	---		---			
	Forward Voltage	Vf	-	-	-	V	

° Operating Temperature: -20~+70°C ° Storage Temperature: -30~+80°C

- * : CRITICAL DIMENSION.
- () : REFERENCE DIMENSION.
- + : SAFETY CHARACTERISTIC.
- ▽ : SPECIAL CHARACTERISTIC.
- : RoHS COMPLIANCE.

			DRAWING No. : HS00D26-VC	
			DRAWING TITLE: BL	
			FILE NO. : 1	
DESIGN	JZ	2023.07.31	REV. : B	SCALE: 1:1
CHECKED	YXF	2023.07.31	PROJECTION:	UNIT: mm
APPROVED	YXF	2023.07.31		SHEET: 1/1