

SPECIFICATIONS

Version: V0

This module uses ROHS material

PRODUCT: TFT LCD MODULE

MODEL NO: HT0700EI02AR7

SUPPLIER: HTDisplay

ISSUED DATE: 2020-07-15

- Preliminary Specification**
- Final Product Specification**

HTDisplay		Customer
Prepared by	Jia Dong	Approved By
Reviewed by	Yuanqi Jia	
Quality Dept	Shipin peng	Date
Approved by	Ruxun wang	

Beijing HTDisplay Electronic Co.,Ltd

Address: 5F Bld. #5, 7 East Rongchang St., Yizhuang Dvpt. Zone,
Daxing District, Beijing 100176 CHINA

Tel: (86) 10 67806456 Fax: (86) 10 67805529




Email:sales@htdisplay.com www.htdisplay.com

No.	Contents	Page
1	General Information	4
2	Mechanical Drawing	5
3	Absolute Maximum Ratings	5
4	Electrical Characteristics	6
5	Backlight Characteristics	6
6	Electro Optical Characteristics	7
7	Read/Write Timing	8
8	Interface Description	9
9	Reliability Test Conditions	10
10	Storage and use Precautions	11
11	Packing	12

1. General information

Feature	Spec	Unit
LCD size	7.0	inch
Resolution	1024 RGB x 600 Dots	---
Pixel pitch (WxH)	0.0502 x 0.1432	mm
Active area	154.21 (W) x 85.92 (H)	mm
Viewing area	157.0 x 89.8	mm
Display Mode	IPS,NB	---
LCM Outline(with TP) (WxHxT)	164.90 × 100.00 × 4.41	mm
With/Without TP	With RTP	---
TFT Driver IC	EK79001HN,EK73215BCGA	---
TFT Interface	RGB 24 bit	---
TFT Input voltage	3.3	V
Backlight Power consumption	4.0	W
LCM brightness	TYP 780(with RTP)	Cd/m ²

2. Mechanical drawing

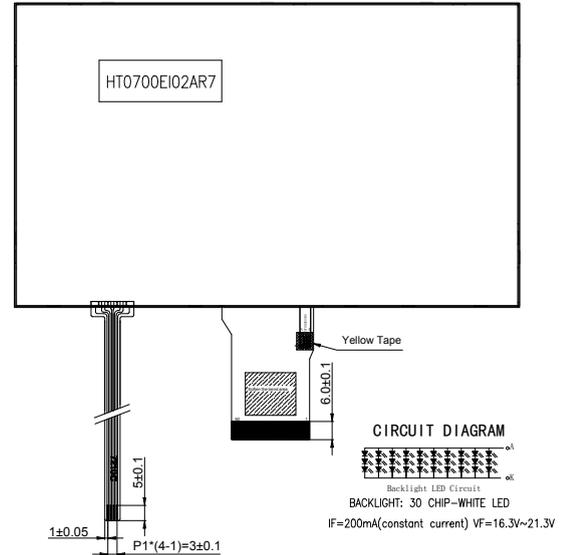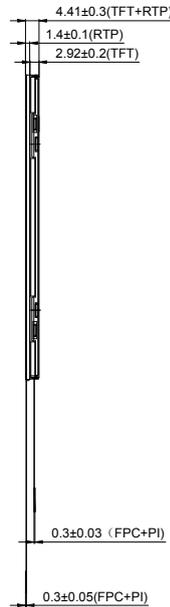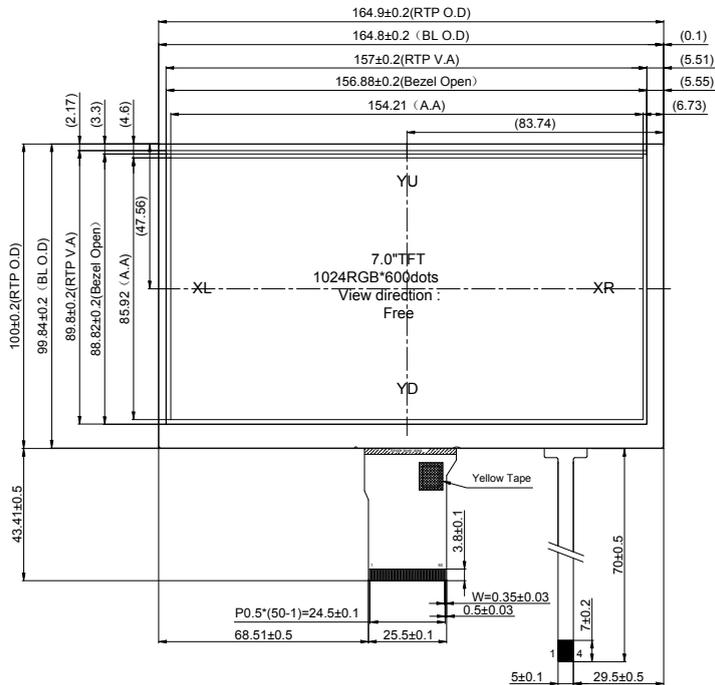

3. Absolute maximum ratings


Item	Symbol	Min.	Max.	Unit
Supply voltage for logic	VDD	-0.3	3.6	V
Input voltage	VIN	-0.3	VDD+0.3	V
Operating temperature	TOP	-20	70	°C
Storage temperature	TST	-30	80	°C
Humidity	RH	--	90%(Max60 °C)	RH

4. Electrical characteristics

Item	Symbol	Min.	Typ.	Max.	Unit
Supply voltage for logic	VDD	2.3	3.3	3.6	V
Input voltage 'H' level	VIH	0.7VDD	--	VDD	V
Input voltage 'L' level	VIL	VSS	--	0.3VDD	V
Output voltage 'H' level	VOH	0.8VDD	--	VDD	V
Output voltage 'L' level	VOL	VSS		0.2VDD	V

5. Backlight characteristics

Item	Symbol	Min.	Typ.	Max.	Unit	Condition
Forward Current	If	--	200	--	mA	
Forward Voltage	Vf	16.3	--	21.3	V	
LED Life Time	Ll	--	50000	--	Hrs	Ta=25°C

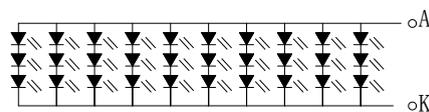

Backlight LED Circuit

BACKLIGHT: 30 CHIP-WHITE LED

IF=200mA(constant current) VF=16.3V~21.3V

Note1: Under LCM operating, the stable forward current should be inputted. And forward voltage is for reference only.

Note2: Optical performance should be evaluated at Ta=25°C. if LED is driven by high current, high ambient temperature & Humidity condition. The life time of LED will be reduced. Operating life means brightness goes down to 50% initial brightness. Typical operating life time is estimated data.

6. Electro-optical characteristics

Optical Specification

Item	Symbol	Condition	Min.	Typ.	Max.	Unit	Note	
Transmittance	T(%)	Θ=0 Normal Viewing angle	4.8	5.0	—	%	Note 1	
Contrast Ratio	CR		—	800	—	—	Note 2	
Response Time	T _{ON} +T _{OFF}		—	30	40	msec	Note 5	
Color Gamut	(%)		—	50	—	%		
Color Chromaticity (CIE1931)	White		W _X	-0.03	0.308	+0.03	—	Note 4
			W _Y		0.336			
	Red		R _X		0.599			
			R _Y		0.338			
	Green		G _X		0.299			
			G _Y		0.550			
	Blue	B _X	0.139					
		B _Y	0.131					
Viewing Angle	Hor.	Θ _L	—	85	—	—	Note 1	
		Θ _R	—	85	—			
	Ver.	Θ _U	—	85	—			
		Θ _D	—	85	—			
Optimal View Direction	Free							

Note :

1. Viewing angle is the angle at which the contrast ratio is greater than 10. The viewing angles are determined for the horizontal or 3, 9 o' clock direction and the vertical or 6, 12 o' clock direction with respect to the optical axis which is normal to the LCD surface (see FIGURE 5).

2. Contrast measurements shall be made at viewing angle of $\theta = 0$ and at the center of the LCD surface. Luminance shall be measured with all pixels in the view field set first to white, then to the dark (black) state . (see FIGURE 5) Luminance Contrast Ratio (CR) is defined mathematically.

$$CR = \frac{\text{Luminance when displaying a white raster}}{\text{Luminance when displaying a black raster}}$$


3. Transmittance is the Value with Polarizer.

4. The color chromaticity coordinates specified in Table 6 shall be calculated from the spectral data measured with all pixels first in red, green, blue and white. Measurements shall be made at the center of the panel.

5. The elector-optical response time measurements shall be made as FIGURE 6 by switching the "data" input signal ON and OFF. The times needed for the luminance to change from 10% to 90% is Tr, and 90% to 10% is TD.

7. Read/Write timing

Item	Symbol	Min.	Typ.	Max.	Unit	Condition
VDD Power On Slew rate	T_{POR}	1	--	20	ms	From 0V 90%ADD
RST pulse width	T_{RST}	50	--	--	ns	DCLK=65MHz
DCLK cycle time	T_{CPH}	14	--	--	ns	
DCLK pulse duty	T_{CWH}	40	50	60	%	
VSD setup time	T_{VST}	5	--	--	ns	
VSD hold time	T_{VHD}	5	--	--	ns	
HSD setup time	T_{HST}	5	--	--	ns	
HSD hold time	T_{HHD}	5	--	--	ns	
Data set-up time	T_{DSU}	5	--	--	ns	
Data hold time	T_{DHD}	5	--	--	ns	D0[7:0],D1[7:0],D2[7:0] to DCLK
DE setup time	T_{ESU}	5	-	--	ns	D0[7:0],D1[7:0],D2[7:0] to DCLK
DE hold time	T_{EHD}	5	--	--	ns	
Output stable time	T_{SST}	--	--	3	us	Dual gate

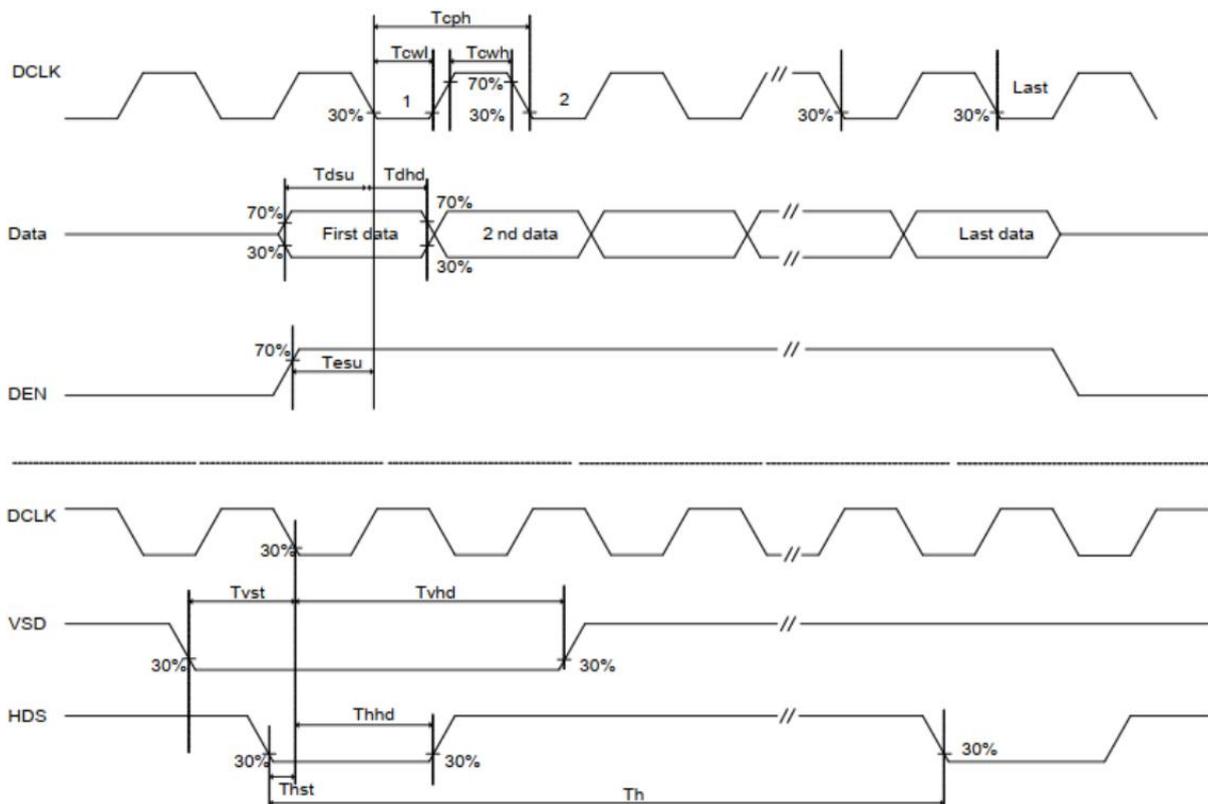

Parallel Input Clock and Data timing

Note:This section is only for reference,Details please refer to the IC specification.

8. Interface description

TFT interface

No.	SYMBOL	Description
1-2	LEDA	LED power anode.
3-4	LEDK	LED power cathode.
5	GND	System ground.
6	VCOM	Power supply for the TFT-LCD common electrode.
7	VDD	Power Supply for Logic.
8	MODE	DE/SYNC mode select.
9	DE	Data input enable. Display access is enabled when DE is "H".
10	VSYNC	Vertical Sync Input
11	HSYNC	Horizontal Sync Input
12-19	B7-B0	Parallel 8-bit digital Blue data input.
20-27	G7-G0	Parallel 8-bit digital Green data input.
28-35	R7-R0	Parallel 8-bit digital Red data input.
36	GND	System ground.
37	DCLK	Pixel clock input pin.
38	GND	System ground.
39	L/R	Horizontal shift direction (source output) selection
40	U/D	Vertical shift direction (gate output) selection
41	VGH	Positive power supply for gate driver.
42	VGL	Negative power supply for gate driver.
43	AVDD	DC/DC converter for positive source OP-AMP driver.
44	RES	This signal will reset the device and must be applied to properly initialize the chip. Signal is active low.
45	NC	-
46	VCOM	Power supply for the TFT-LCD common electrode.
47	DITHB	Dithering function enable control, normally pull high.
48	GND	System ground.
49-50	NC	-

9. Reliability test conditions

No.	Test Item	Test condition	Remark
1	High Temperature Storage	80°C±2°C 240H	IEC60068-2-1:2007 GB2423.2-2008
2	Low Temperature Storage	-30°C±2°C 240H	IEC60068-2-1:2007 GB2423.1-2008
3	High Temperature Operation	70°C±3°C 240H	IEC60068-2-1:2007 GB2423.2-2008
4	Low Temperature Operation	-20°C±3°C 240H	IEC60068-2-1:2007 GB2423.1-2008
5	High Temperature /Humidity Storage	40°C±3°C 90%RH 240H	IEC60068-2-78:2007 GB2423.3-2006
6	Temperature Cycle	-30°C←→25°C←→80°C 5min 30min ←→25°C , 5min after 10cycle, Restore 4H at 25°C	IEC60068-2-14:1984 GB2423.22-2002
7	Vibration Test	10Hz~150Hz, 100m/s ² , 120min	IEC60068-2-6:1982 GB/T2423.10-1995
8	Mechanical shock	100G ±X,±Y,±Z 3times for each direction	IEC60068-2-27:1987 GB/T2423.5-1995
9	Packing vibration test	0.015G ² /Hz from 50~200Hz 6dB/Octave from 200~500Hz 2hours for each direction of X,Y,Z	IEC60068-2-34 GB/T2423.11
10	Dropping test	Drop to the ground from 0.5m height, one time, every side of carton. (Packing condition)	IEC60068-2-32:1990 GB/T2423.8-1995
11	ESD test	Voltage:±10KV R: 330Ω C: 150pF Air discharge, 10time	IEC61000-4-2:2001 GB/T17626.2-2006

Note1:

The component placed on a vibrating platform as it is assembled in the machine, wires included, is subjected to sinusoidal vibration in all directions XYZ

Note2:

After completing the reliability test, leave the samples under the room temperature and for the following inspection items:

1. No clearly visible defects or deterioration of display quality allowed.
2. No function-related abnormalities.
3. Connected parts still connecting tightly.
4. Display characteristics fulfill initial value contrast ratio should be an least 30% of initial value.

10. Storage and use precautions

When storing and using the LCD modules, the following precaution are necessary:


- 10.1 Store them in a sealed polyethylene bag. If properly sealed, there is no need for the desiccant.
- 10.2 Store them in a dark place. Do not expose to sunlight or fluorescent light, keep the temperature between 0°C and 35°C, and keep the relative humidity between 40%RH and 60%RH.
- 10.3 The LCD modules should be stored in the room without acid, alkali and harmful gas.
- 10.4 The polarizer surface should not come in contact with any other objects (We advise you to store them in the anti-static electricity container in which they were shipped).
- 10.5 The LCD modules should be no falling and violent shocking during transportation, and also should avoid excessive press, water, damp and sunshine.
- 10.6 Liquid crystals solidify under low temperature (below the storage temperature range) leading to defective orientation or the generation of air bubbles (black or white). Air bubbles may also be generated if the module is subject to a low temperature.
- 10.7 If the LCD modules have been operating for a long time showing the same display patterns, the display patterns may remain on the screen as ghost images and a slight contrast irregularity may also appear. A normal operating status can be gained by suspending use for some time. It should be noted that this phenomenon does not adversely affect performance reliability.
- 10.8 The display panel is made of glass. Do not subject it to a mechanical shock by dropping it from a high place, etc.
- 10.9 If the display panel is damaged and the liquid crystal substance inside it leaks out, be sure not to get any in your mouth, if the substance comes into contact with your skin or clothes, promptly wash it off using soap and water.
- 10.10 Do not apply excessive force to the display surface or the adjoining areas since this may cause the color tone to vary.
- 10.11 The polarizer covering the display surface of the LCD module is soft and easily scratched. Handle this polarizer carefully.
- 10.12 If the display surface is contaminated, gently wipe it with a soft dry cloth. If still not completely clear, moisten cloth with one of the following solvents:
 - Isopropyl alcohol
 - Ethyl alcoholSolvents other than those mentioned above may damage the polarizer. Especially, do not use the following:
 - Water
 - Ketone
 - Aromatic solvents
- 10.13 Do not attempt to disassemble the LCD Module.

10.14 If the logic circuit power is off, do not apply the input signals.

10.15 To prevent destruction of the elements by static electricity, be careful to maintain an optimum work environment.

- Be sure to ground the body when handling the LCD Modules.
- Tools required for assembly, such as soldering irons, must be properly ground.
- To reduce the amount of static electricity generated, do not conduct assembly and other work under dry conditions
- The LCD Module is coated with a film to protect the display surface. -
- Be care when peeling off this protective film since static electricity may be generated.
- Exposed area of the printed circuit board.
- Terminal electrode sections

11. Packing

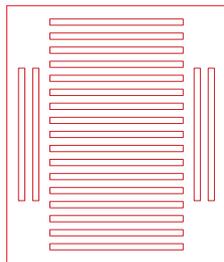


(1)


(1) Place the module into the pearl cotton tray.

(2) Place the pearl cotton tray into the carton.

(3) Wrap the carton well.

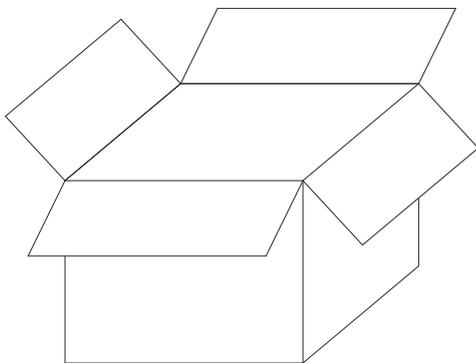

(2)

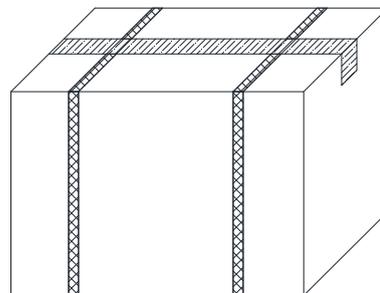

(3)