



弯折示意图  
弯折出货

- NOTES:  
 1. GENERAL TOLERANCE:  $\pm 0.2$   
 2. ( ) REFERENCE DIMENSION  
 3. Important dimension: ①~⑤



interface mode select			
IM1	IMO	Interface Mode	Use PIN
0	1	3-line 9bit serial I/F	SDA: in/out,CS,SCL
1	0	4-line 8bit serial I/F	SDA: in/out,CS,SCL,RS

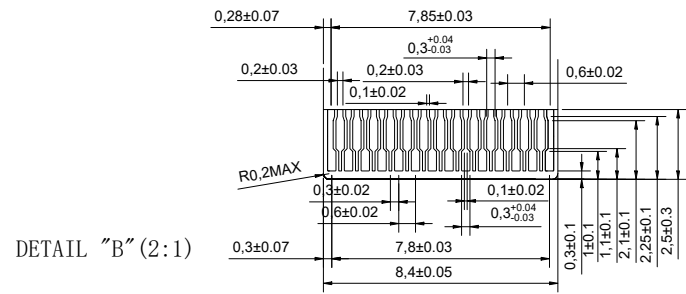

NO	PIN
1	GND
2	VDDA
3	VDDI
4	RESX
5	SDA
6	SCL
7	CS
8	RS
9	IMO
10	IM1
11	NC
12	NC
13	D2
14	D3
15	D4
16	D5
17	D6
18	D7
19	VS
20	HS
21	DE
22	PCLK
23	TE
24	LEDA
25	LEDK

LCD Type	1.45" TFT, Transmissive Normally BLACK, IPS
Resolution	172(RGB)*320
View Direction	ALL o'clock
LCD driver IC	5T7789V3
Color depth	262K
Interface types	SPI+RGB6-bit
Operating voltage	2.8~3.3V
With TP/Lens	without
Backlight	3 LEDs, 60mA(typ), 3.0V(ref)
Surface luminance	750 cd/m <sup>2</sup> (typ)
Operating temperature	-20°C~70°C
Storage temperature	-30°C~80°C
Color chromaticity	[white] x/y:

版本 (Version)	变更记录 (Revise History)	日期 (Date)
A1	Initial release	2021.09.23

设计 (DESIGN)	Sam
审核 (CHECKED)	Aron
批准 (APPROVED)	Aron
客户承认 (CUSTOMER APPROVAL)	



TITLE: LCM	页面 (Page) 1 / 1
Drawing No. TST015QVBS-01	单位 (Unit) mm
	比例 (SCALE) 1 : 1
	角度 (Angle)