



**WINSTAR Display Co.,Ltd.**  
**華凌光電股份有限公司**



# Winstar Display Co., LTD

## 華凌光電股份有限公司



WEB: <https://www.winstar.com.tw> E-mail: sales@winstar.com.tw

### SPECIFICATION

**CUSTOMER :** \_\_\_\_\_

**MODULE NO.:** WF39BTLASDNGA#

|   |  |
|---|--|
| <p><b>APPROVED BY:</b></p> <p>( FOR CUSTOMER USE ONLY )</p> | <p><b>PCB VERSION:</b> _____</p> <p><b>DATA:</b> _____</p> |
|---|--|

| SALES BY                       | APPROVED BY | CHECKED BY | PREPARED BY |
|--------------------------------|-------------|------------|-------------|
|                                |             |            | 葉虹蘭         |
| <b>ISSUED DATE: 2019/07/05</b> |             |            |             |

TFT Display Inspection Specification: <https://www.winstar.com.tw/technology/download.html>

Precaution in use of TFT module: <https://www.winstar.com.tw/technology/download/declaration.html>

**RECORDS OF REVISION**

**DOC. FIRST ISSUE**

| VERSION | DATE       | REVISED<br>PAGE NO. | <b>SUMMARY</b>  |
|---------|------------|---------------------|-----------------|
| 0       | 2018/05/11 |                     | First issue     |
| A       | 2018/08/21 |                     | Add Uniformity  |
| B       | 2019/07/05 |                     | Add FW Version. |

# Contents

1.Module Classification Information

2.Summary

3.General Specification

4.Absolute Maximum Ratings

5.Electrical Characteristics

6.DC Characteristics

7.Interface Timing

8.Optical Characteristics

9.Interface

10.Block Diagram

11.Reliability

12.Touch Panel Information

13.Contour Drawing

14.Other

# 1.Module Classification Information

W F 39 B T L A S D N G A #  
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪ ⑫ ⑬

|   |   |                                    |   |         |   |   |  |                                    |               |                                |   |         |
|---|---|------------------------------------|---|---------|---|---|--|------------------------------------|---------------|--------------------------------|---|---------|
| ① | Brand : WINSTAR DISPLAY CORPORATION   |                                    |   |         |   |   |  |                                    |               |                                |   |         |
| ② | Display Type : F→TFT Type, J→Custom TFT   |                                    |   |         |   |   |  |                                    |               |                                |   |         |
| ③ | Display Size : 3.9" TFT   |                                    |   |         |   |   |  |                                    |               |                                |   |         |
| ④ | Model serials no.   |                                    |   |         |   |   |  |                                    |               |                                |   |         |
| ⑤ | Backlight Type :  |                                    | F→CCFL, White<br>S→LED, High Light White  |         |   |   | T→LED, White<br>Z→Nichia LED, White  |                                    |               |                                |   |         |
| ⑥ | LCD Polarize Type/<br>Temperature range/ Gray Scale Inversion Direction   |                                    | A→Transmissive, N.T, IPS TFT<br>C→Transmissive, N. T, 6:00 ;<br>F→Transmissive, N.T,12:00 ;<br>I→Transmissive, W. T, 6:00<br>K→Transflective, W.T,12:00<br>L→Transmissive, W.T,12:00<br>N→Transmissive, Super W.T, 6:00 |         |   |   | Q→Transmissive, Super W.T, 12:00<br>R→Transmissive, Super W.T, O-TFT<br>V→Transmissive, Super W.T, VA TFT<br>W→Transmissive, Super W.T, IPS TFT<br>X→Transmissive, W.T, VA TFT<br>Y→Transmissive, W.T, IPS TFT<br>Z→Transmissive, W.T, O-TFT |                                    |               |                                |   |         |
| ⑦ | A : TFT LCD<br>B : TFT+SCREW HOLES+CONTROL BOARD<br>C : TFT+ SCREW HOLES +A/D BOARD<br>D : TFT+ SCREW HOLES +A/D BOARD+CONTROL BOARD<br>E : TFT+ SCREW HOLES +POWER BOARD |                                    |   |         |   | F : TFT+CONTROL BOARD<br>G : TFT+ SCREW HOLES<br>H : TFT+D/V BOARD<br>I : TFT+ SCREW HOLES +D/V BOARD<br>J : TFT+POWER BD |  |                                    |               |                                |   |         |
| ⑧ | Resolution:   |                                    |   |         |   |   |  |                                    |               |                                |   |         |
|   | A   | 128160                             | B   | 320234  | C | 320240  | D  | 480234                             | E             | 480272                         | F | 640480  |
|   | G   | 800480                             | H   | 1024600 | I | 320480  | J  | 240320                             | K             | 800600                         | L | 240400  |
|   | M   | 1024768                            | N   | 128128  | P | 1280800   | Q  | 480800                             | R             | 640320                         | S | 480128  |
|   | T   | 800320                             | U   | 8001280 | V | 176220  | W  | 1280398                            | X             | 1024250                        | Y | 1920720 |
|   | Z   | 800200                             | 2   | 1024324 | 3 | 7201280   | 4  | 19201200                           | 5             | 1366768                        | 6 | 1280320 |
| ⑨ | D: Digital L : LVDS M:MIPI  |                                    |   |         |   |   |  |                                    |               |                                |   |         |
| ⑩ | Interface:  |                                    |   |         |   |   |  |                                    |               |                                |   |         |
|   | N   | Without control board              |   |         | A | 8Bit  |  | B                                  | 16Bit         |                                | H | HDMI    |
|   | I   | I2C Interface                      |   |         | R | RS232   |  | S                                  | SPI Interface |                                | U | USB     |
| ⑪ | TS:   |                                    |   |         |   |   |  |                                    |               |                                |   |         |
|   | N   | Without TS                         |   |         | T | Resistive touch panel   |  |                                    | C             | Capacitive touch panel (G-F-F) |   |         |
|   | G   | Capacitive touch panel (G-G)       |   |         |   |   | C1   | Capacitive touch panel (G-F-F)+OCA |               |                                |   |         |
|   | C2  | Capacitive touch panel (G-F-F)+OCR |   |         |   |   | G1   | Capacitive touch panel (G-G)+OCA   |               |                                |   |         |
|   | G2  | Capacitive touch panel (G-G)+OCR   |   |         |   |   | B  | CTP+GG+USB                         |               |                                |   |         |
| ⑫ | Version: X:Raspberry pi   |                                    |   |         |   |   |  |                                    |               |                                |   |         |
| ⑬ | Special Code  |                                    | #:Fit in with ROHS directive regulations  |         |   |   |  |                                    |               |                                |   |         |

## **2.Summary**

TFT 3.9” is a TN transmissive type color active matrix TFT liquid crystal display that use amorphous silicon TFT as switching devices. This module is a composed of a TFT\_LCD module, It is usually designed for industrial application and this module follows RoHs.

### 3. General Specifications

| Item                           | Dimension                         | Unit |
|--------------------------------|-----------------------------------|------|
| Size                           | 3.9                               | inch |
| Dot Matrix                     | 480x128 x RGB (TFT)               | dots |
| Module dimension               | 105.5(W) x 37.0(H) x 5.13(D)      | mm   |
| Active area                    | 95.04 x 25.34                     | mm   |
| Dot pitch                      | 0.066(W)x 0.198(H)                | mm   |
| LCD type                       | TFT, Normally White, Transmissive |      |
| View Direction                 | 6 o'clock                         |      |
| Gray Scale Inversion Direction | 12 o'clock                        |      |
| Aspect Ratio                   | Bar Type                          |      |
| Backlight Type                 | LED, Normally White               |      |
| TFT Driver IC                  | HX8278-A Or Equal                 |      |
| TFT Interface                  | RGB-24BIT (SYNC mode)             |      |
| CTP IC                         | GT911 or equivalent               |      |
| CTP FW Version                 | 0X99                              |      |
| With /Without TP               | With CTP                          |      |
| Surface                        | Glare                             |      |

\*Color tone slight changed by temperature and driving voltage.

## **4. Absolute Maximum Ratings**

| <b>Item</b>           | <b>Symbol</b> | <b>Min</b> | <b>Typ</b> | <b>Max</b> | <b>Unit</b> |
|-----------------------|---------------|------------|------------|------------|-------------|
| Operating Temperature | TOP           | -20        | —          | +70        | °C          |
| Storage Temperature   | TST           | -30        | —          | +80        | °C          |

Note: Device is subject to be damaged permanently if stresses beyond those absolute maximum ratings listed above

1. Temp.  $\leq 60^{\circ}\text{C}$ , 90% RH MAX. Temp.  $> 60^{\circ}\text{C}$ , Absolute humidity shall be less than 90% RH at  $60^{\circ}\text{C}$



# 5. Electrical Characteristics

## 5.1. Operating conditions


| Item                           | Symbol | Condition | Min | Typ | Max | Unit | Remark |
|--------------------------------|--------|-----------|-----|-----|-----|------|--------|
| Supply Voltage For LCM         | VCC    | —         | 3.0 | 3.3 | 3.6 | V    |        |
| Supply Current For LCM         | ICC    | —         | —   | 15  | 25  | mA   | Note 1 |
| Supply Voltage For Touch Logic | VDDT   | —         | 2.8 | —   | 3.3 | V    |        |

Note 1 : This value is test for VCC =3.3V , Ta=25 °C only

## 5.2. LED driving conditions

| Item                | Symbol            | MIN | TYP   | MAX | Unit | Remark       |
|---------------------|-------------------|-----|-------|-----|------|--------------|
| Forward Current     | I <sub>LED</sub>  | —   | 40    | —   | mA   | Note 1,2,3,4 |
| Forward Voltage     | V <sub>LED+</sub> | 14  | 15    | 17  | V    |              |
| Backlight life time | —                 | —   | 50000 | —   | hr   |              |

Note 1 : There are 1 Groups LED

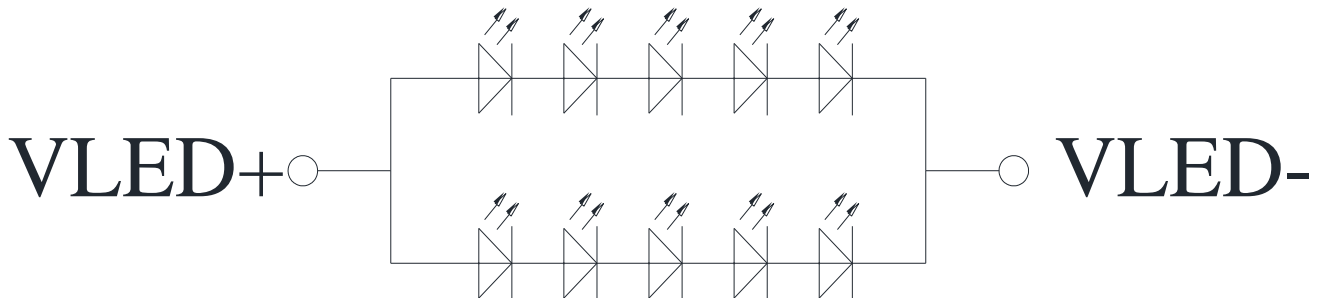

Note 2 : Ta = 25 °C

Note 3 : Brightness to be decreased to 50% of the initial value

Note 4 : The single LED lamp case

## 6.DC CHARATERISTICS

| Parameter                | Symbol   | Rating |     |        | Unit | Condition |
|--------------------------|----------|--------|-----|--------|------|-----------|
|                          |          | Min    | Typ | Max    |      |           |
| Low level input voltage  | $V_{IL}$ | 0      | -   | 0.3VCC | V    |           |
| High level input voltage | $V_{IH}$ | 0.7VCC | -   | VCC    | V    |           |

# 7. Interface Timing

## 7.1. Parallel RGB in SYNC mode

### 7.1.1 Horizontal

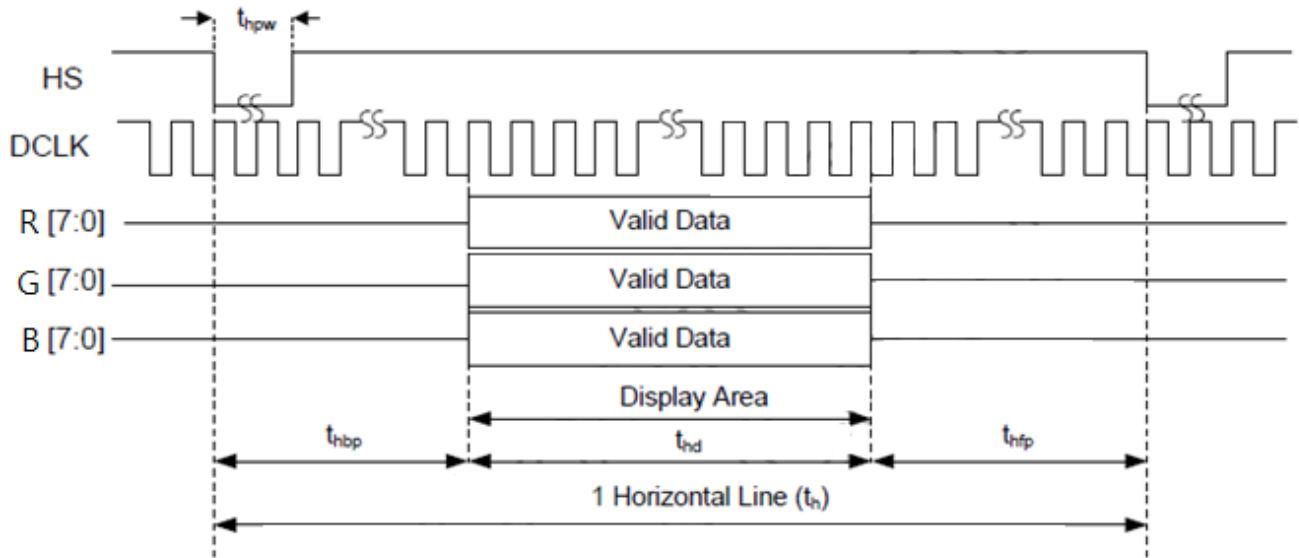


Figure 7.1: Horizontal input timing in Sync mode

### 7.1.2 Horizontal

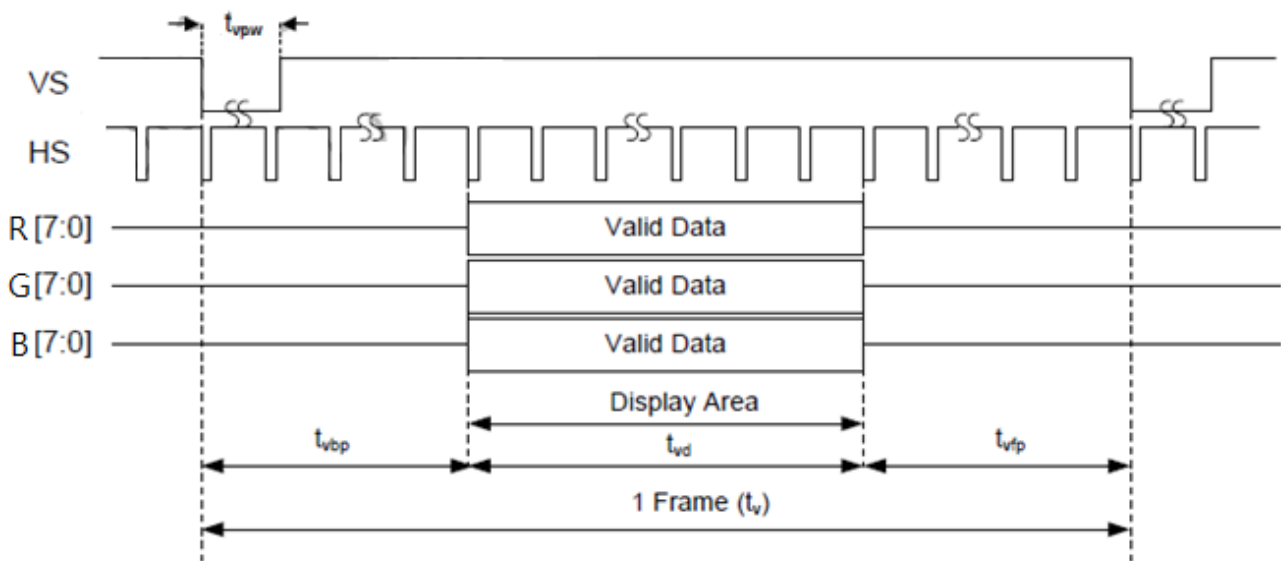


Figure 7.2: Vertical input timing in Sync mode

## 7.2. Parallel SYNC mode RGB input timing table

| Item          | Symbol         | Min    | Typ  | Max | Unit |      |
|---------------|----------------|--------|------|-----|------|------|
| CLK frequency | Fclk           | -      | 9.05 | -   | MHz  |      |
| DCLK Period   | Tclk           | -      | 111  | -   | ns   |      |
| HSYNC         | Period Time    | Th     | 510  | 524 | 862  | DCLK |
|               | Display Period | Thdisp | -    | 480 | -    | DCLK |
|               | Back Porch     | Thbp   | 6    | 16  | 127  | DCLK |
|               | Front Porch    | Thfp   | 24   | 28  | 255- | DCLK |
|               | Pulse Width    | Thw    | 11   | 16  | 127  | DCLK |
| VSYNC         | Period Time    | Tv     | 280  | 288 | 526  | H    |
|               | Display Period | Tvdisp | -    | 272 | -    | H    |
|               | Back Porch     | Tvbp   | 4    | 8   | 127  | H    |
|               | Front Porch    | Tvfp   | 4    | 8   | 127  | H    |
|               | Pulse Width    | Tvw    | 1    | 3   | 20   | H    |

# 8. Optical Characteristics

| Item   | Symbol | Condition.                     | Min        | Typ.  | Max.  | Unit              | Remark            |            |
|--|--------|--------------------------------|------------|-------|-------|-------------------|-------------------|------------|
| Response time                                  | Tr     | $\theta=0^\circ, \phi=0^\circ$ | -          | 10    | -     | ms                | Note 3            |            |
|  | Tf     |                                | -          | 15    | -     |                   |                   |            |
| Contrast ratio                                 | CR     | At optimized viewing angle     | -          | 500   | -     | -                 | Note 4            |            |
| Color Chromaticity                             | White  | $\theta=0^\circ, \phi=0^\circ$ | Wx         | 0.269 | 0.319 | 0.369             | -                 | Note 2,6,7 |
|  |        |                                | Wy         | 0.273 | 0.323 | 0.373             | -                 |            |
| Viewing angle (Gray Scale Inversion Direction) | Hor.   | $CR \geq 10$                   | $\Theta_R$ | -     | 65    | -                 | Deg.              | Note 1     |
|  |        |                                | $\Theta_L$ | -     | 65    | -                 |                   |            |
|  | Ver.   |                                | $\Phi_T$   | -     | 65    | -                 |                   |            |
|  |        |                                | $\Phi_B$   | -     | 50    | -                 |                   |            |
| Brightness                                     | -      | -                              | 300        | 400   | -     | cd/m <sup>2</sup> | Center of display |            |
| Uniformity                                     | (U)    | -                              | 75         | -     | -     | %                 | Note 5            |            |

Ta=25±2°C, ILED=40mA

Note 1: Definition of viewing angle range

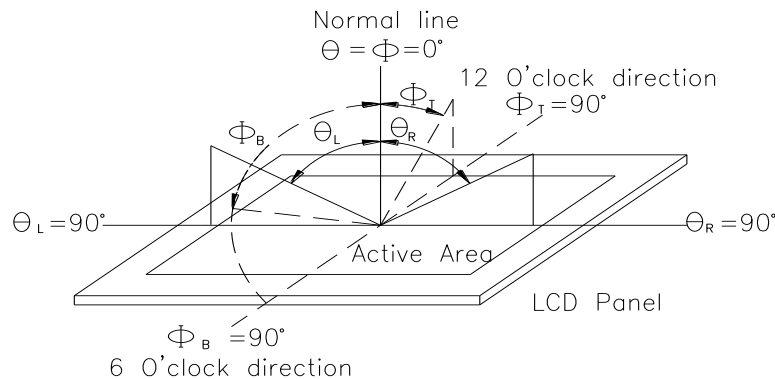


Fig. 8.1. Definition of viewing angle

Note 2: Test equipment setup:

After stabilizing and leaving the panel alone at a driven temperature for 10 minutes, the measurement should be executed. Measurement should be executed in a stable, windless, and dark room. Optical specifications are measured by Topcon BM-7orBM-5 luminance meter 1.0° field of view at a distance of 50cm and normal direction.


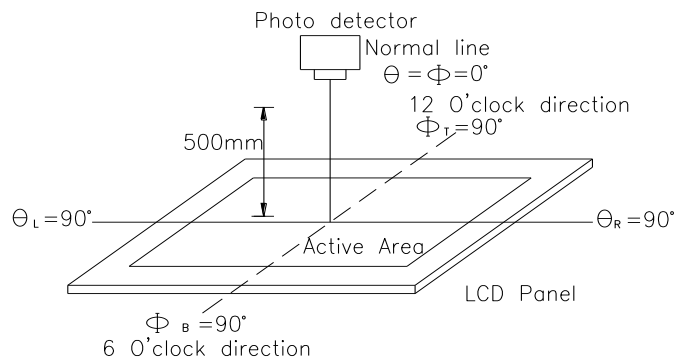


Fig. 8.2. Optical measurement system setup

**Note 3: Definition of Response time:**

The response time is defined as the LCD optical switching time interval between “White” state and “Black” state. Rise time,  $T_r$ , is the time between photo detector output intensity changed from 90% to 10%. And fall time,  $T_f$ , is the time between photo detector output intensity changed from 10% to 90%

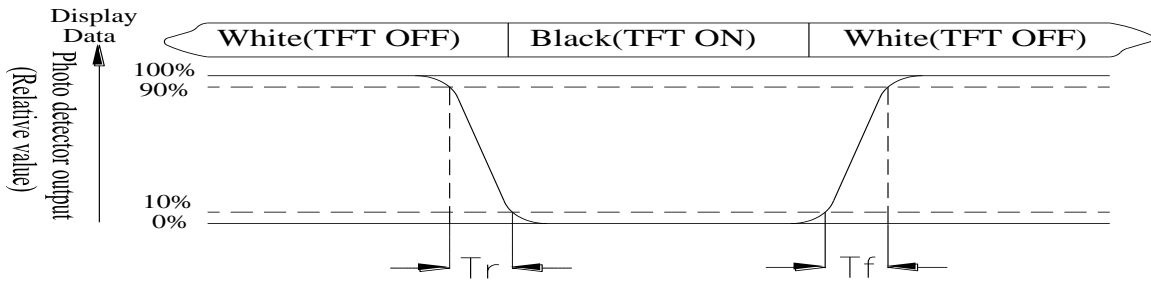

**Note 4: Definition of contrast ratio:**

The contrast ratio is defined as the following expression.

$$\text{Contrast ratio (CR)} = \frac{\text{Luminance measured when LCD on the "White" state}}{\text{Luminance measured when LCD on the "Black" state}}$$

**Note 5: Definition of Luminance Uniformity**

Active area is divided into 9 measuring areas (reference the picture in below). Every measuring point is placed at the center of each measuring area.

$$\text{Luminance Uniformity (U)} = L_{\min}/L_{\max} \times 100\%$$

$L$  = Active area length

$W$  = Active area width

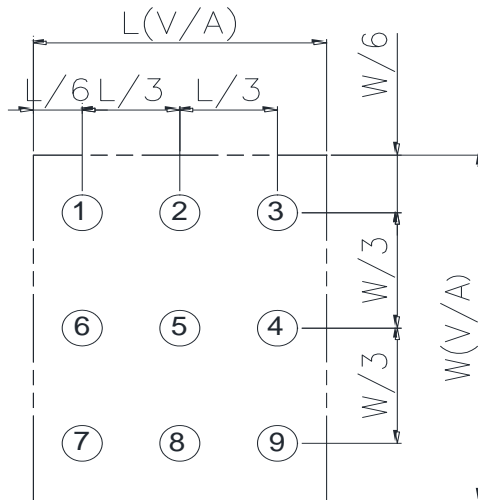


Fig8.3. Definition of uniformity

**Note 6: Definition of color chromaticity (CIE 1931)**

Color coordinates measured at the center point of LCD

**Note 7:** Measured at the center area of the panel when all the input terminals of LCD panel are electrically opened.

# 9.Interface

## 9.1. LCM PIN Definition

| No.   | Symbol | Description                      | Remark |
|-------|--------|----------------------------------|--------|
| 1     | VLED-  | Backlight LED Cathode            |        |
| 2     | VLED+  | Backlight LED Anode.             |        |
| 3     | GND    | System Ground                    |        |
| 4     | VCC    | Power supply for logic operation |        |
| 5~12  | R0~R7  | Data bus                         |        |
| 13~20 | G0~G7  | Data bus                         |        |
| 21~28 | B0~B7  | Data bus                         |        |
| 29    | GND    | System Ground                    |        |
| 30    | DCLK   | Pixel clock signal               |        |
| 31    | DISP   | Display on/off control           |        |
| 32    | HSYNC  | Horizontal Sync signal           | Note1  |
| 33    | VSYNC  | Vrtical Sync signal              | Note1  |
| 34    | NC     | No connection (Option DE)        | Note1  |
| 35    | NC     | No connection                    |        |
| 36    | GND    | System Ground                    |        |
| 37    | NC     | No connection                    |        |
| 38    | NC     | No connection                    |        |
| 39    | NC     | No connection                    |        |
| 40    | NC     | No connection                    |        |


Note1: This module default function is for SYNC mode, if this module want change to use DE mode , the FPC have to modify resistive jumper

## 9.2. CTP PIN Definition

| Pin | Symbol | Function                       | Remark |
|-----|--------|--------------------------------|--------|
| 1   | VSS    | Ground for analog circuit      |        |
| 2   | VDDT   | Power Supply : +3.0V           |        |
| 3   | SCL    | I2C clock input.               |        |
| 4   | NC     | No connect                     |        |
| 5   | SDA    | I2C data input and output      |        |
| 6   | NC     | No connect                     |        |
| 7   | /RST   | External Reset, Low is active  |        |
| 8   | NC     | No connect                     |        |
| 9   | /INT   | External interrupt to the host |        |
| 10  | VSS    | Ground for analog circuit      |        |



# 10. Block Diagram

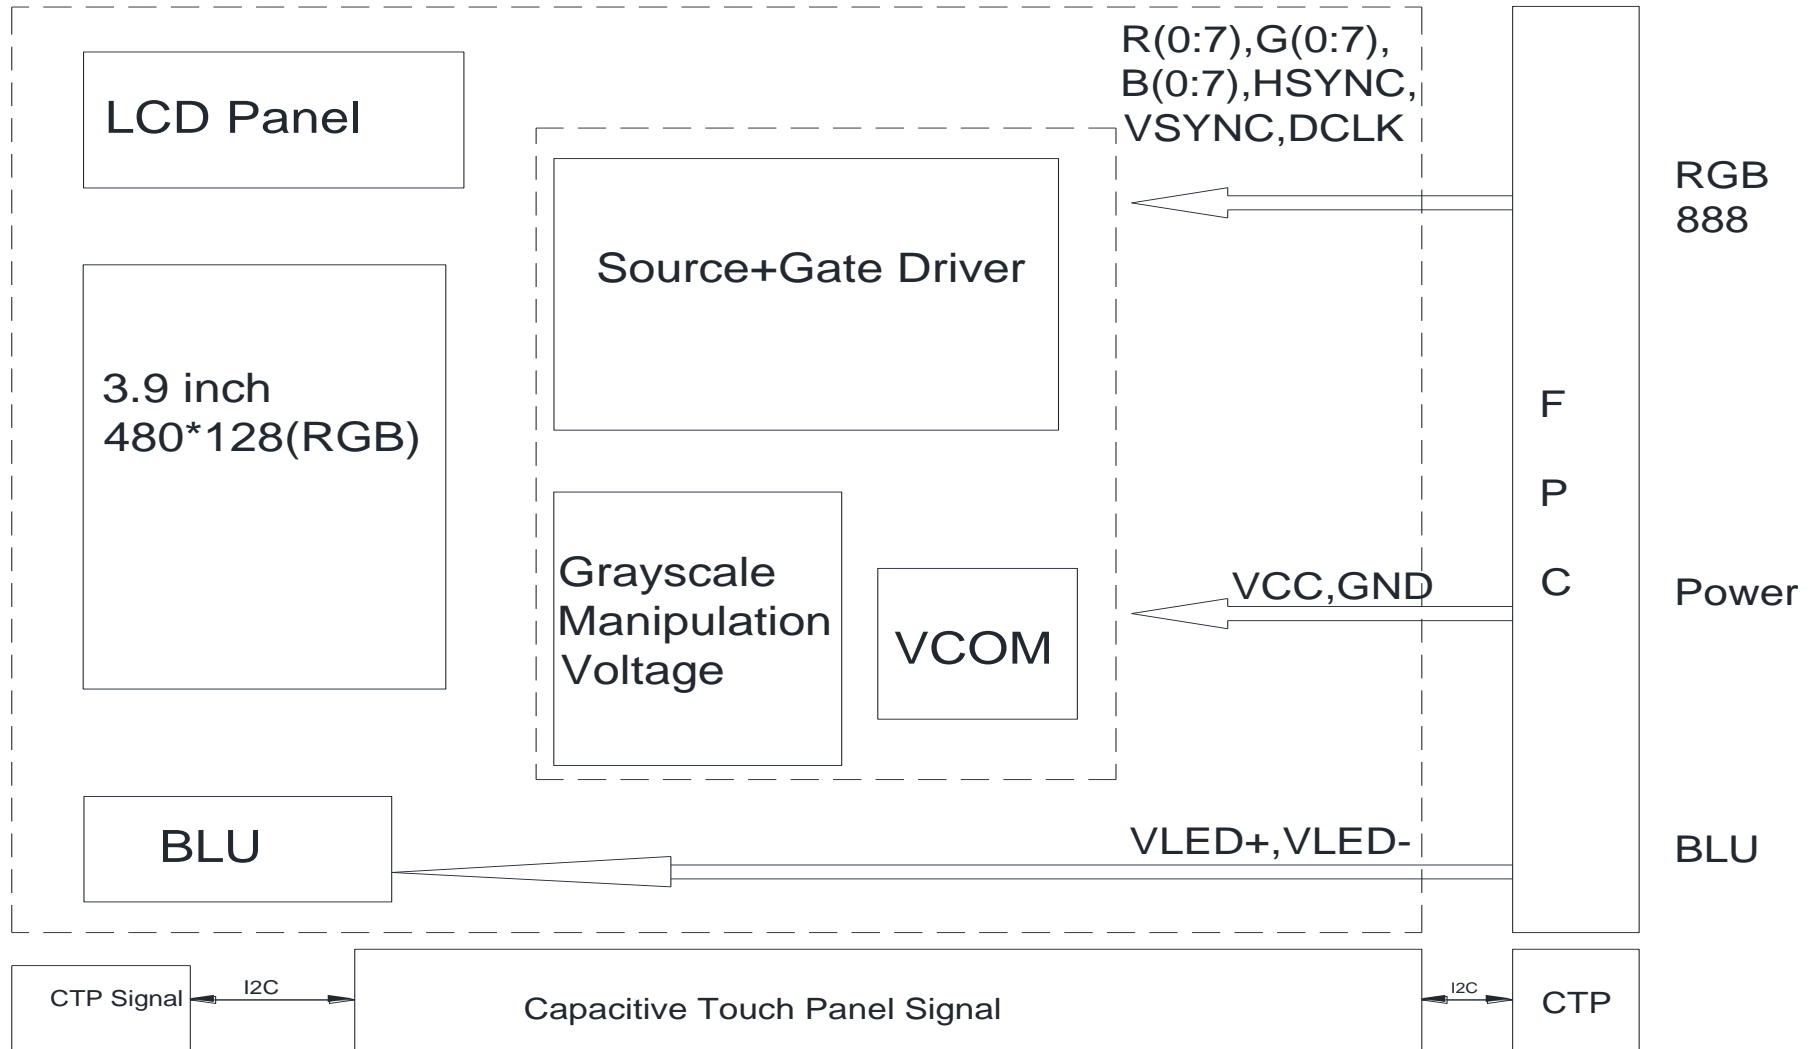

# 11. Reliability

Content of Reliability Test (Wide temperature, -20°C~70°C)


| Environmental Test                      |  |  |      |
|---|--|--|------|
| Test Item                               | Content of Test  | Test Condition   | Note |
| High Temperature storage                | Endurance test applying the high storage temperature for a long time.  | 80°C<br>200hrs   | 2    |
| Low Temperature storage                 | Endurance test applying the low storage temperature for a long time.   | -30°C<br>200hrs  | 1,2  |
| High Temperature Operation              | Endurance test applying the electric stress (Voltage & Current) and the thermal stress to the element for a long time.   | 70°C<br>200hrs   | —    |
| Low Temperature Operation               | Endurance test applying the electric stress under low temperature for a long time.   | -20°C<br>200hrs  | 1    |
| High Temperature/<br>Humidity Operation | The module should be allowed to stand at 60°C,90%RH max  | 60°C,90%RH<br>96hrs  | 1,2  |
| Thermal shock resistance                | The sample should be allowed stand the following 10 cycles of operation<br><div style="text-align: center;"> <p style="margin: 0;">-20°C    25°C    70°C</p> <p style="margin: 0;">30min    5min    30min</p> <p style="margin: 0;">1 cycle</p> </div> | -20°C/70°C<br>10 cycles  | —    |
| Vibration test                          | Endurance test applying the vibration during transportation and using.   | Total fixed amplitude : 1.5mm<br>Vibration<br>Frequency : 10~55Hz<br>One cycle 60 seconds to 3 directions of X,Y,Z for Each 15 minutes | 3    |
| Static electricity test                 | Endurance test applying the electric stress to the terminal.   | VS=±600V(contact),<br>±800v(air),<br>RS=330Ω<br>CS=150pF<br>10 times   | —    |

Note1: No dew condensation to be observed.


Note2: The function test shall be conducted after 4 hours storage at the normal Temperature and humidity after remove from the test chamber.

Note3: The packing have to including into the vibration testing.

# 12.Touch Panel Information

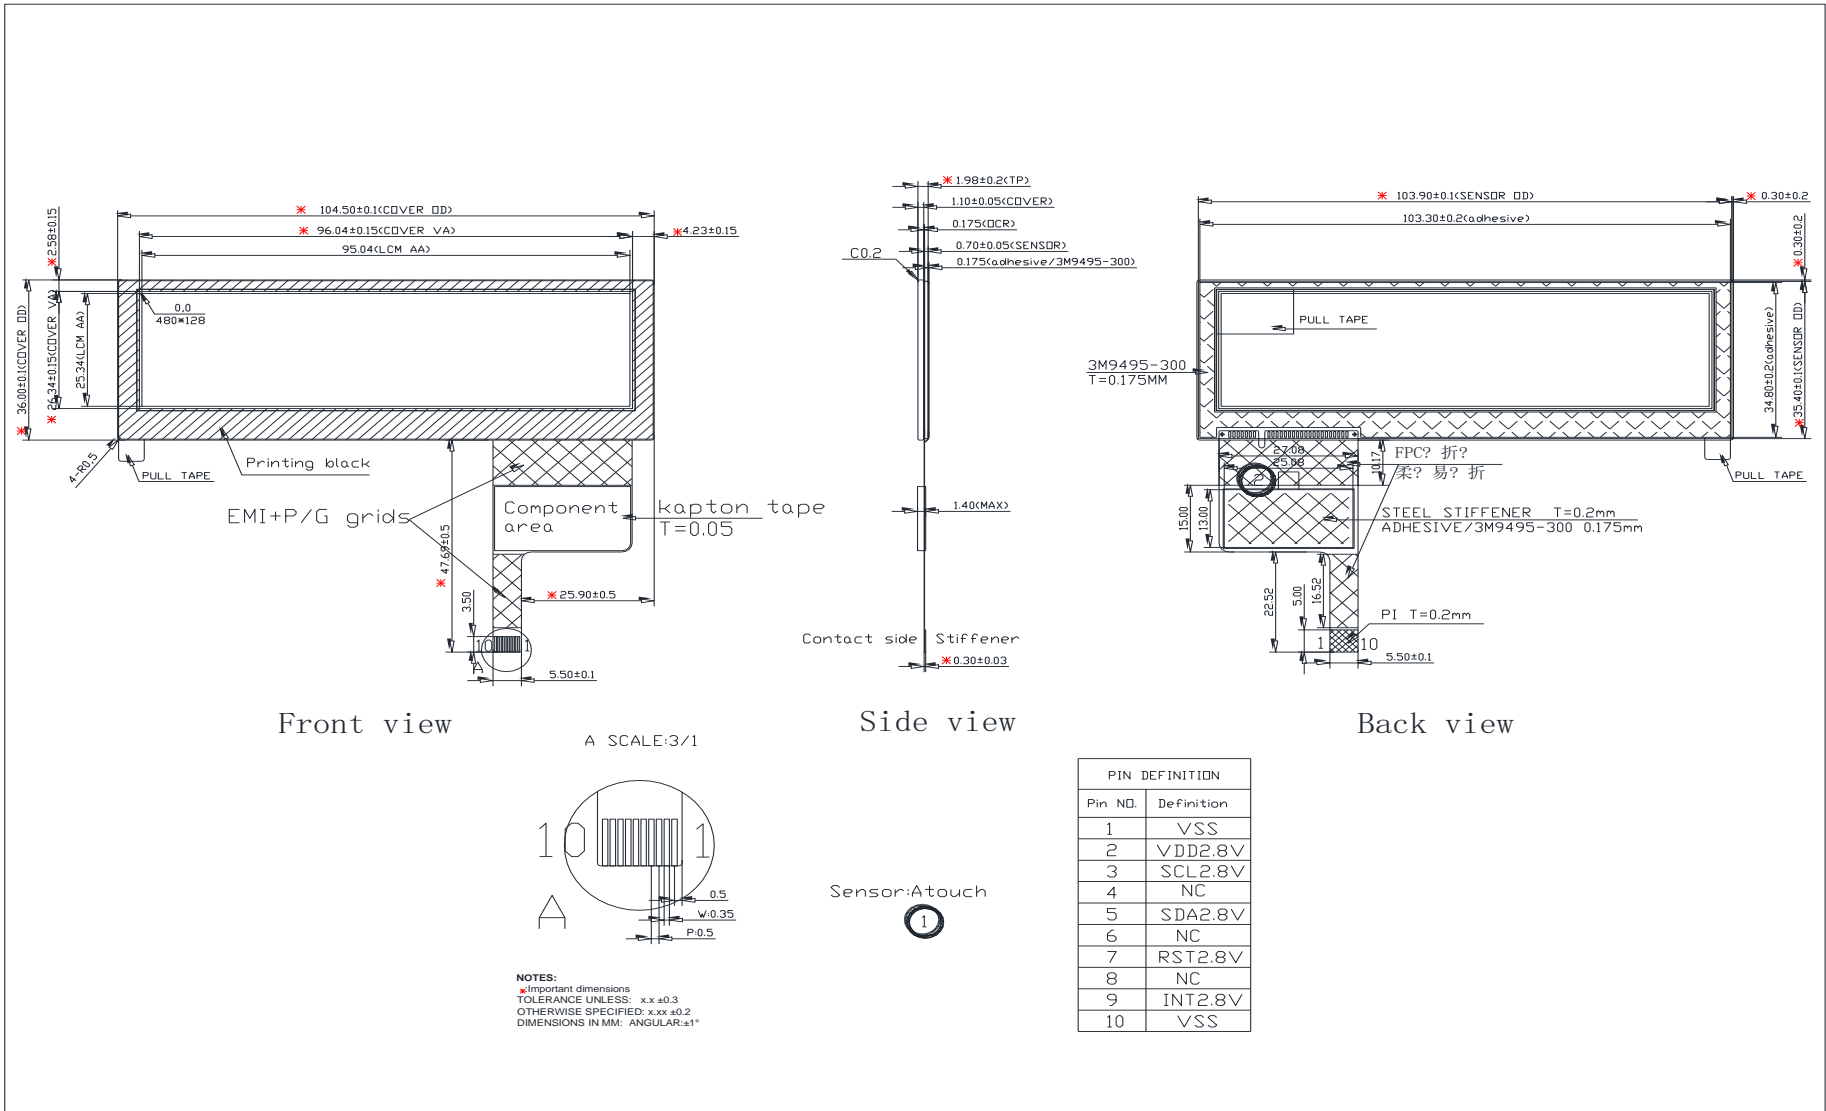

# 13. Contour Drawing

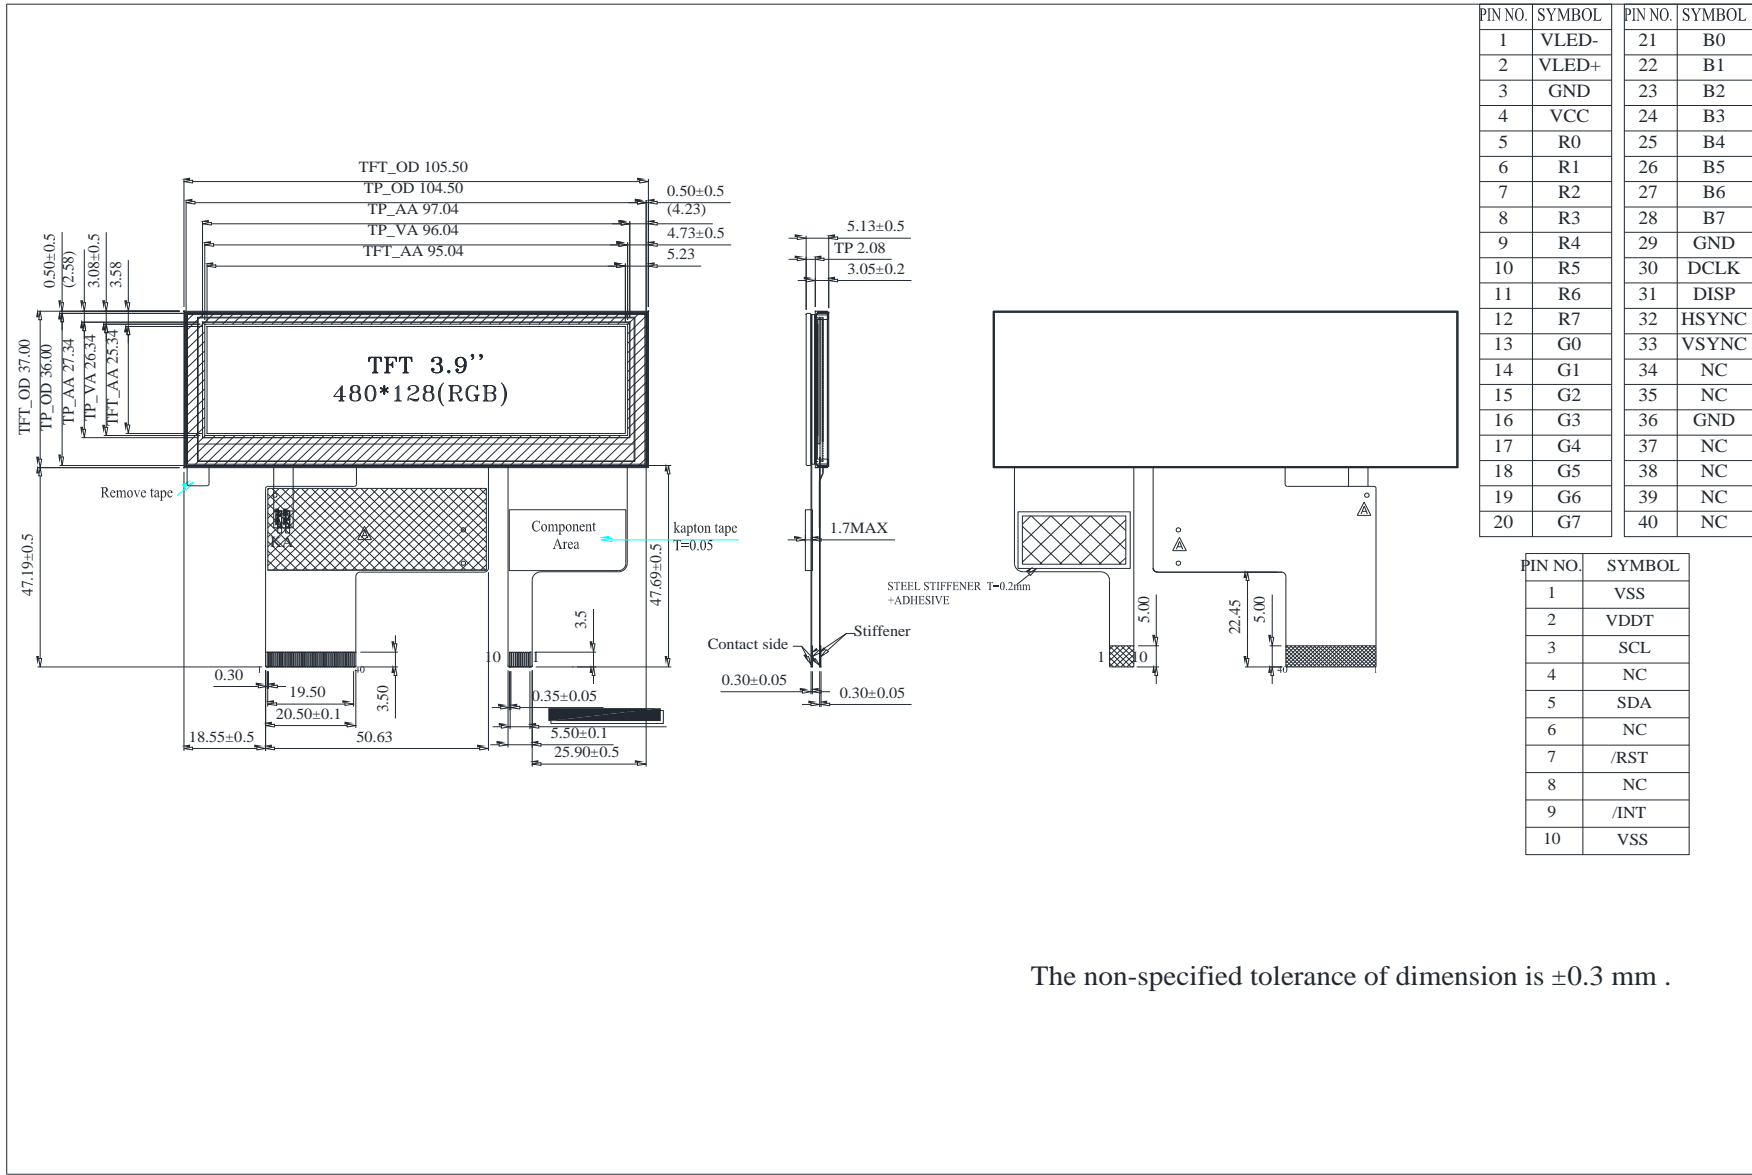

| PIN NO. | SYMBOL | PIN NO. | SYMBOL |
|---------|--------|---------|--------|
| 1       | VLED-  | 21      | B0     |
| 2       | VLED+  | 22      | B1     |
| 3       | GND    | 23      | B2     |
| 4       | VCC    | 24      | B3     |
| 5       | R0     | 25      | B4     |
| 6       | R1     | 26      | B5     |
| 7       | R2     | 27      | B6     |
| 8       | R3     | 28      | B7     |
| 9       | R4     | 29      | GND    |
| 10      | R5     | 30      | DCLK   |
| 11      | R6     | 31      | DISP   |
| 12      | R7     | 32      | HSYNC  |
| 13      | G0     | 33      | VSYNC  |
| 14      | G1     | 34      | NC     |
| 15      | G2     | 35      | NC     |
| 16      | G3     | 36      | GND    |
| 17      | G4     | 37      | NC     |
| 18      | G5     | 38      | NC     |
| 19      | G6     | 39      | NC     |
| 20      | G7     | 40      | NC     |

| PIN NO. | SYMBOL |
|---------|--------|
| 1       | VSS    |
| 2       | VDDT   |
| 3       | SCL    |
| 4       | NC     |
| 5       | SDA    |
| 6       | NC     |
| 7       | /RST   |
| 8       | NC     |
| 9       | /INT   |
| 10      | VSS    |

The non-specified tolerance of dimension is ±0.3 mm .



**1、Panel Specification :**

- 1. Panel Type :  Pass  NG , \_\_\_\_\_
- 2. View Direction :  Pass  NG , \_\_\_\_\_
- 3. Numbers of Dots :  Pass  NG , \_\_\_\_\_
- 4. View Area :  Pass  NG , \_\_\_\_\_
- 5. Active Area :  Pass  NG , \_\_\_\_\_
- 6. Operating Temperature :  Pass  NG , \_\_\_\_\_
- 7. Storage Temperature :  Pass  NG , \_\_\_\_\_
- 8. Others : \_\_\_\_\_

**2、Mechanical Specification :**

- 1. PCB Size :  Pass  NG , \_\_\_\_\_
- 2. Frame Size :  Pass  NG , \_\_\_\_\_
- 3. Material of Frame :  Pass  NG , \_\_\_\_\_
- 4. Connector Position :  Pass  NG , \_\_\_\_\_
- 5. Fix Hole Position :  Pass  NG , \_\_\_\_\_
- 6. Backlight Position :  Pass  NG , \_\_\_\_\_
- 7. Thickness of PCB :  Pass  NG , \_\_\_\_\_
- 8. Height of Frame to PCB :  Pass  NG , \_\_\_\_\_
- 9. Height of Module :  Pass  NG , \_\_\_\_\_
- 10. Others :  Pass  NG , \_\_\_\_\_

**3、Relative Hole Size :**

- 1. Pitch of Connector :  Pass  NG , \_\_\_\_\_
- 2. Hole size of Connector :  Pass  NG , \_\_\_\_\_
- 3. Mounting Hole size :  Pass  NG , \_\_\_\_\_
- 4. Mounting Hole Type :  Pass  NG , \_\_\_\_\_
- 5. Others :  Pass  NG , \_\_\_\_\_

**4、Backlight Specification :**

- 1. B/L Type :  Pass  NG , \_\_\_\_\_
- 2. B/L Color :  Pass  NG , \_\_\_\_\_
- 3. B/L Driving Voltage (Reference for LED Type) :  Pass  NG , \_\_\_\_\_
- 4. B/L Driving Current :  Pass  NG , \_\_\_\_\_
- 5. Brightness of B/L :  Pass  NG , \_\_\_\_\_
- 6. B/L Solder Method :  Pass  NG , \_\_\_\_\_
- 7. Others :  Pass  NG , \_\_\_\_\_

>> **Go to page 2** <<



Winstar      Module Number : \_\_\_\_\_

Page: 2

**5、Electronic Characteristics of Module :**

- 1. Input Voltage :                       Pass                       NG , \_\_\_\_\_
- 2. Supply Current :                       Pass                       NG , \_\_\_\_\_
- 3. Driving Voltage for LCD :            Pass                       NG , \_\_\_\_\_
- 4. Contrast for LCD :                     Pass                       NG , \_\_\_\_\_
- 5. B/L Driving Method :                 Pass                       NG , \_\_\_\_\_
- 6. Negative Voltage Output :            Pass                       NG , \_\_\_\_\_
- 7. Interface Function :                  Pass                       NG , \_\_\_\_\_
- 8. LCD Uniformity :                      Pass                       NG , \_\_\_\_\_
- 9. ESD test :                               Pass                       NG , \_\_\_\_\_
- 10. Others :                                 Pass                       NG , \_\_\_\_\_

**6、Summary :**

Sales signature : \_\_\_\_\_

Customer Signature : \_\_\_\_\_

Date :        /        /        \_\_\_\_\_