
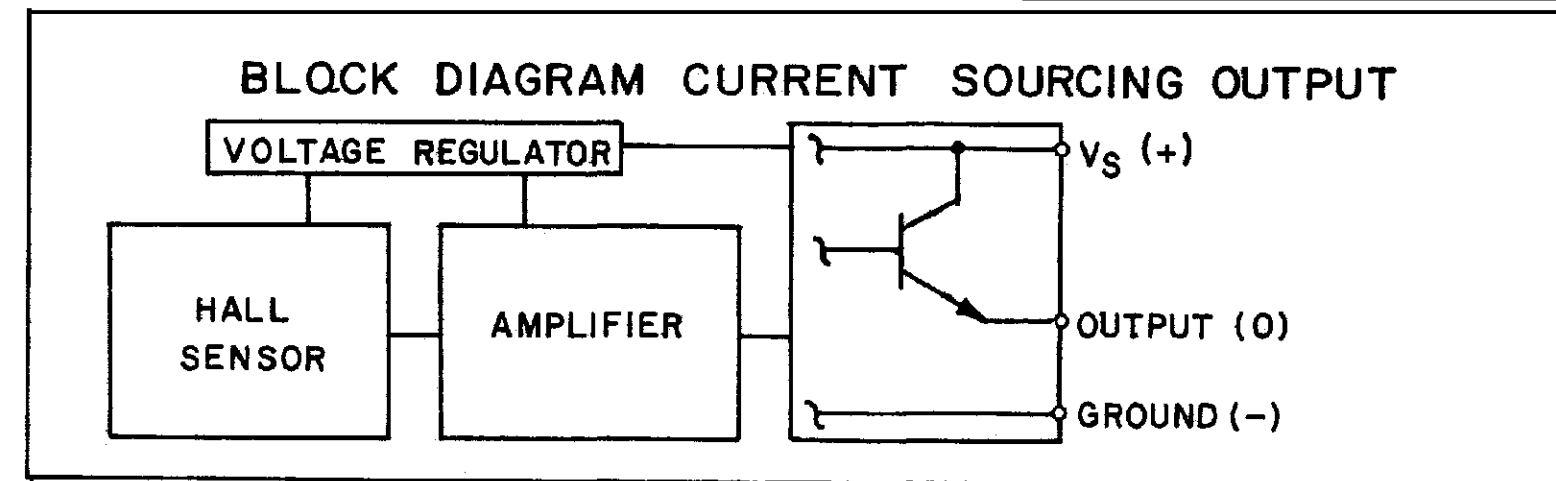


- NOTES**
- 1 THE + MAGNETIC FLUX IS IN THIS DIRECTION (THIS ASSUMES THE CONVENTION THAT THE DIRECTION OF THE EXTERNAL FLUX OF A MAGNET IS FROM THE NORTH TO THE SOUTH POLE OF THE MAGNET)
  - 2 AT 25°C AND 2,200 OHM LOAD
  - 3 - ABSOLUTE MAXIMUM RATINGS ARE THE EXTREME LIMITS THAT THE DEVICE WILL WITHSTAND WITHOUT DAMAGE TO THE DEVICE. HOWEVER, THE ELECTRICAL AND MAGNETIC CHARACTERISTICS ARE NOT GUARANTEED AS THE MAXIMUM LIMITS (ABOVE RECOMMENDED OPERATING CONDITIONS) ARE APPROACHED NOR WILL THE DEVICE NECESSARILY OPERATE AT ABSOLUTE MAXIMUM RATING
  - 4 - REFERENCE CURVES

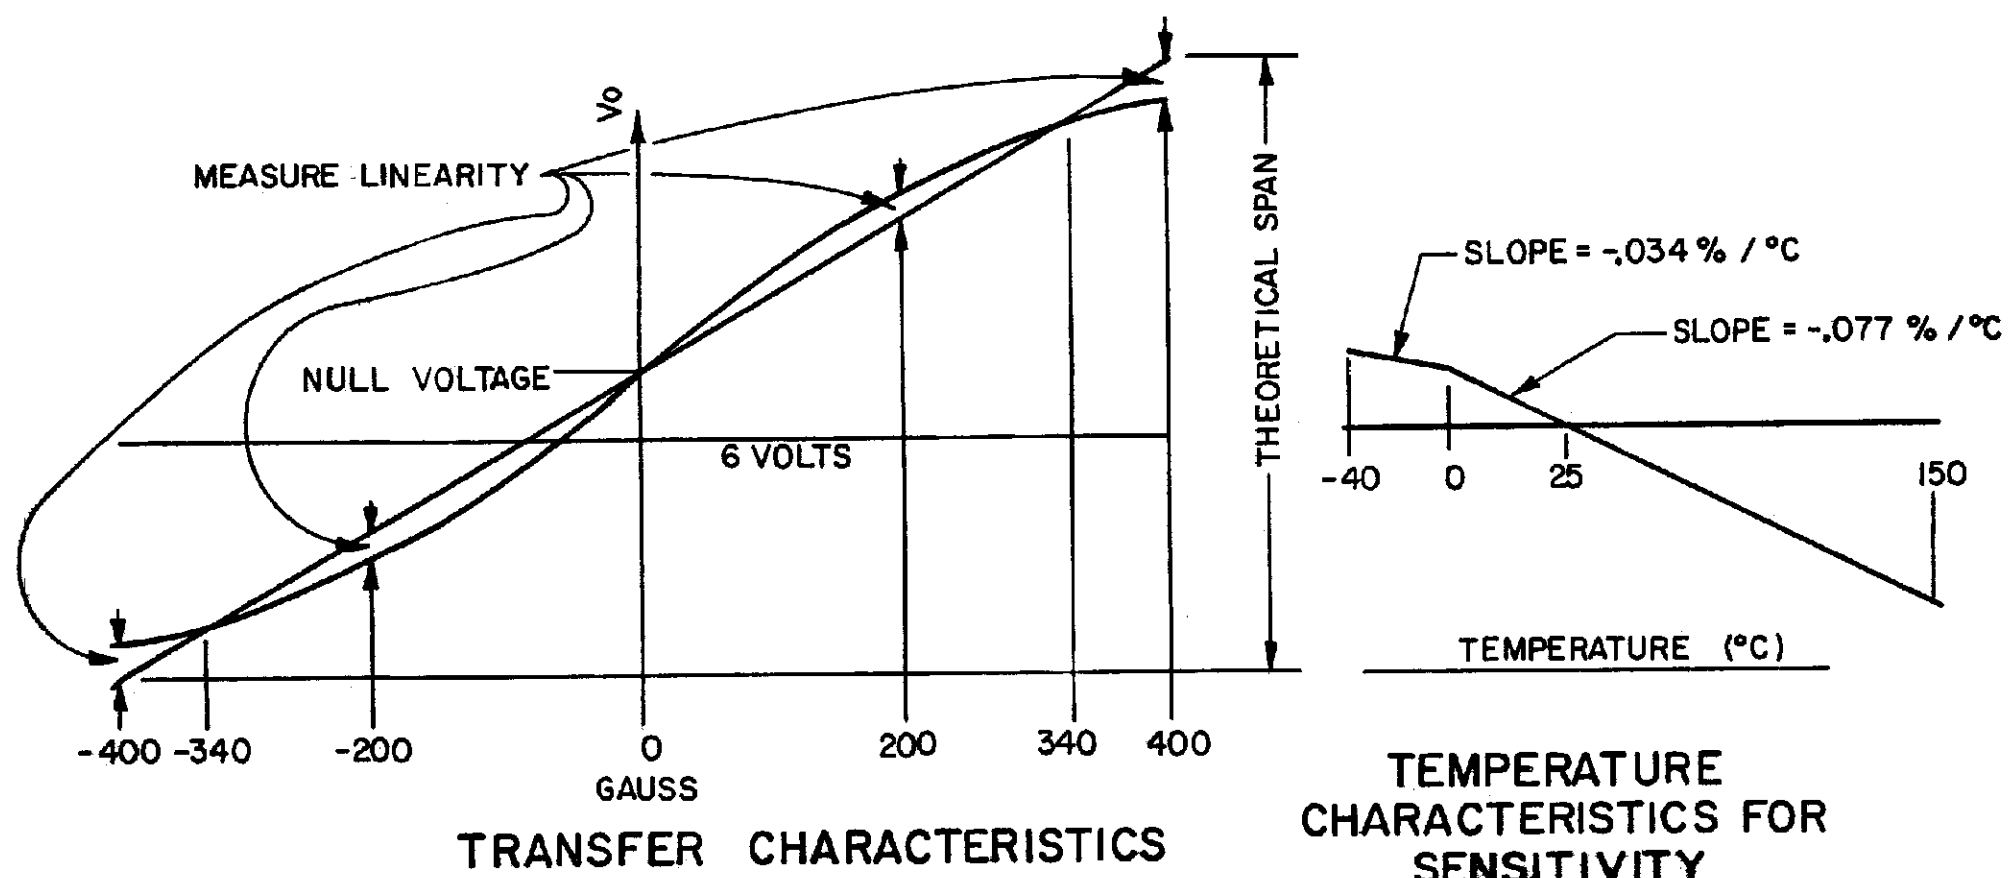

**MAGNETIC CHARACTERISTICS**

PARAMETER	PERFORMANCE @ 12 VDC	
	TYPICAL	MAX TOLERANCE
SPAN (-400 TO +400 GAUSS)	6.00 VDC	
NULL (OFFSET AT 0 GAUSS)	6 VDC	±0.6 VDC
SENSITIVITY (MV/GAUSS) (V <sub>0</sub> @ 340g - V <sub>0</sub> @ -340g)/680	9.9	±.3
LINEARITY % OF SPAN		±1.5%
TEMPERATURE ERROR NULL % OF SPAN		
-40°C TO 150°C		±5%
-25°C TO 85°C		±3%
0°C TO 50°C		±2%
GAIN		
-40°C TO 0°C	-0.034%/°C	
0°C TO 150°C	-0.077%/°C	

**ELECTRICAL CHARACTERISTICS**

	24°C	-40°C TO +150°C	REMARKS
SUPPLY CURRENT (MAX)	16mA	19mA	EXCLUDING LOAD CURRENT 8 TO 16VDC SUPPLY VOLTAGE

**ABSOLUTE MAXIMUM RATING**

SUPPLY VOLTAGE	-0.5 TO +18.0 VDC
OUTPUT CURRENT	10 mA MAX
STORAGE TEMPERATURE	-40°C TO 150°C
MAGNETIC FLUX	NO LIMIT, THE CIRCUIT CANNOT BE DAMAGED BY MAGNETIC OVERDRIVE

THIRD ANGLE PROJECTION

SCALE NONE  
DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

ONE PLACE	(.0)	±.030
TWO PLACES	(.00)	±.015
THREE PLACES	(.000)	±.005
ANGLES		±

WEIGHT

DRAWING NUMBER 91SS16-3  
 PAGE 1 OF 1  
 RELEASE NO. PR-24224  
 ISSUE 4  
 REVISIONS: A (095600) TSM 14 SEP 99; B (08704) DLM 2 MAR 00; C (0039911) SS 19MAY08  
 CHECKED: J J A 127AUG99  
 DRAWN: RASTER  
 ANSI Y14.5M-1982 APPLIES



THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

**MICRO SWITCH**  
a Honeywell Division

**SOLID STATE LINEAR OUTPUT HALL EFFECT TRANSDUCER**

CATALOG LISTING  
**91SS16-3**

FED. MFG. CODE 91929

MASTER REDUCED