

Doc. No: LUMI 3528-2P- 05 08 17- SPEC

3528-2PIN-SMD LED

White LED

Customer Approval		Model	LMFL2P35A1WHZ03					
<table border="1"><tr><td>Checked By</td><td>Approved By</td></tr><tr><td></td><td></td></tr></table>		Checked By	Approved By			Issued Date	2005 – 08 - 17	
		Checked By	Approved By					
		Description	SMD Type LED					
Written By	Checked By	Approved by						

Contact Point

Tel: 82-31-213-9200

Fax: 82-31-213-9210

Homepage: www.lumimicro.com




Lumimicro 3528 – One Chip Specification

Lumimicro FLASH LED P/N

LUMIMICRO 3528 FLASH LED Part No. - Explanation

LM	: LUMIMICRO
FL	: FLASH LED - SMD Type
2P	: 2 Pin PKG
35	: Package Size(3.5*2.8*1.9T)
A	: Polarity Mark(A : Anode, C : Cathode)
1	: Chip Quantity
WH	: Color - White Color
Z	: ZENER (Z : ZENER, X : NO ZENER)
03	: Max DC Current -30mA (03 : 30mA, 06 : 60mA.....)


[EX]

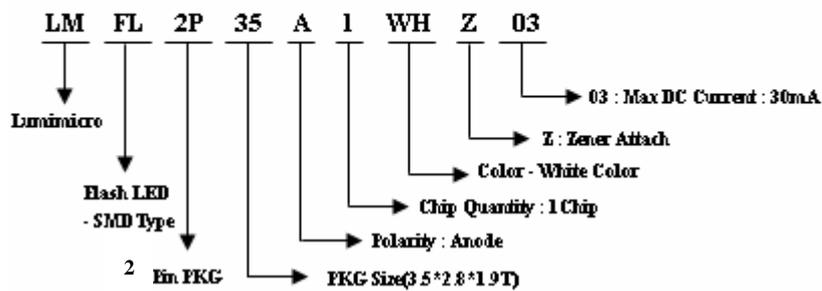

Lumimicro 3528 – One Chip Specification


Features

- [1] Built-in 1 chip Super-luminosity Chip LED
- [2] Super-luminosity chip LED
- [3] Wide viewing angle
- [4] External dimensions: 3.5 x 2.8 x 1.9t mm
- [5] Lead frame package with individual 2 pin




Outline Dimensions

* Outline Dimensions

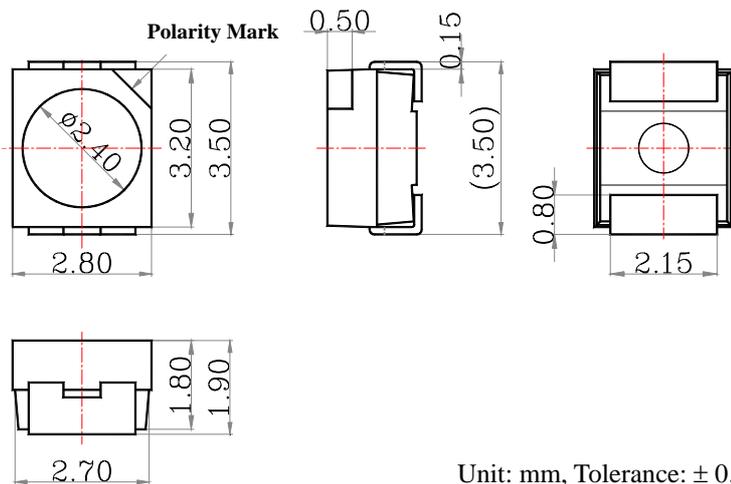

LED Circuit Diagram

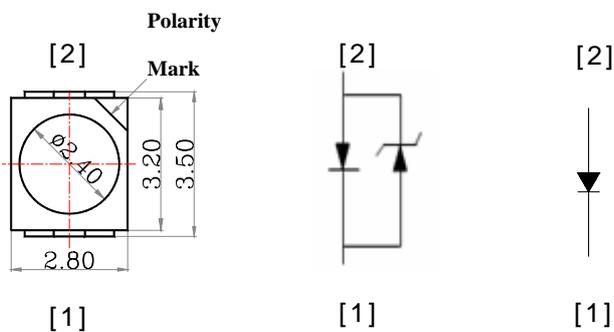

Lumimicro 3528 – One Chip Specification

Absolute Maximum Rating

Parameter	Color	Symbol	Rating Value	Unit
Forward DC Current	All Color	IF-1	30	m A
Forward Pulse Current ^{*1}	All Color	IPF-1	100	m A
Reverse Voltage	All Color	VR-1	5	V
ESD Voltage	All Color	ESD-1	HBM 16000	V
Storage Temperature	All Color	TST	-40 to + 120	°C
Soldering Temperature	All Color	TSD	260C for 5 Seconds	°C

*1: Forward Pulse Current : Pulse Width < 10msec / Duty Ratio < 1/10

Peak Luminous Intensity Characteristics [Condition: 20mA – Ta = 25°C]

Color	Part No.	Item	Symbol	Luminous Intensity			Unit
				MIN.	TYP.	Max	
White	LMFL2P35A1WHZ03	Luminous Intensity	IV	1000	1500	2000	mcd
White	LMFL2P35A1WHX03	Luminous Intensity	IV	1000	1500	2000	mcd
Warm White	LMFL2P35A1WWZ03	Luminous Intensity	IV	400.0	550.0	-	mcd

Measurement Tolerance: + / - 10%

CCT Characteristics [Condition: 20mA – Ta = 25°C]

Color	P/N	Item	Symbol	CCT			Unit
				MIN.	TYP.	Max	
White	LMFL2P35A1WHZ03	Color Temperature	CCT	4500.0	6500.0	10000.0	K
	LMFL2P35A1WHX03	Color Temperature	CCT	4500.0	6500.0	10000.0	K
Warm White	LMFL2P35A1WWZ03	Color Temperature	CCT	2800.0	3200.0	3800.0	K

Measurement Tolerance: + / - 10%

Lumimicro 3528 – One Chip Specification


Forward Voltage Characteristics [Condition: 20mA – Ta = 25°C]

Color	Item	Symbol	Forward Voltage			Unit
			MIN.	TYP.	Max	
All White	Forward Voltage	VF	2.8	3.2	3.6	V


Measurement Tolerance: +/- 10%

White CIE Bin Spec [Condition: 20mA – Ta = 25°C]







K1		K2		H1		H2	
X	Y	X	Y	X	Y	X	Y
0.290	0.298	0.311	0.294	0.330	0.360	0.345	0.372
0.311	0.320	0.330	0.339	0.345	0.372	0.361	0.385
0.311	0.294	0.330	0.318	0.345	0.338	0.356	0.351
0.290	0.276	0.311	0.320	0.330	0.318	0.345	0.338
Y1		Y2		Y3		Y4	
X	Y	X	Y	X	Y	X	Y
0.290	0.320	0.311	0.341	0.290	0.339	0.311	0.361
0.311	0.341	0.330	0.360	0.311	0.361	0.330	0.380
0.311	0.320	0.330	0.339	0.311	0.341	0.330	0.360
0.290	0.298	0.311	0.320	0.290	0.320	0.311	0.341

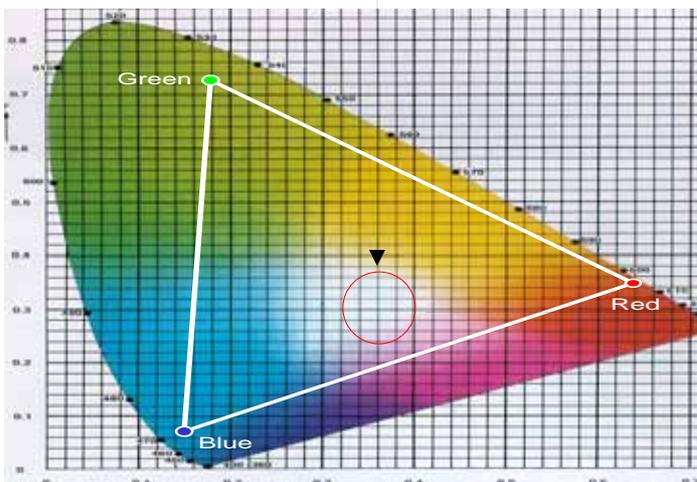

3528 FLASH LED 1CHIP WHITE COLOR C.I.E RANK


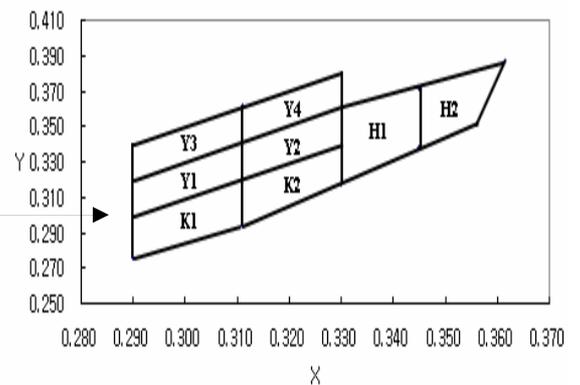


Optical & Electrical Characteristics

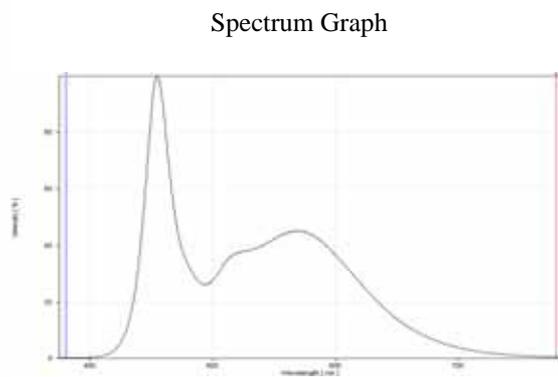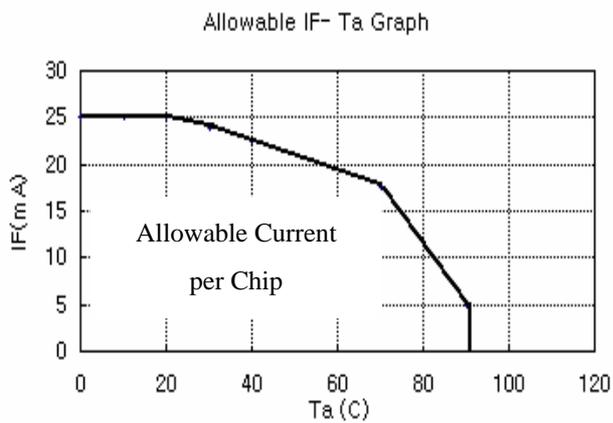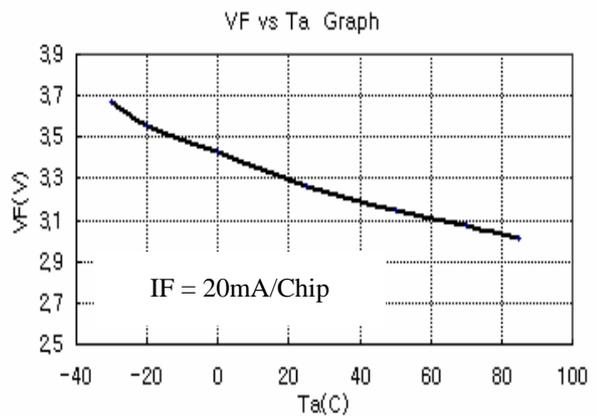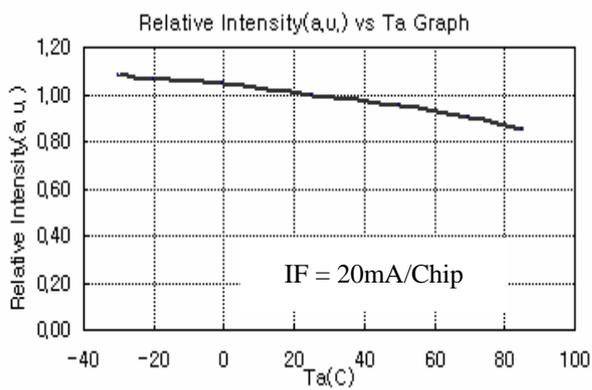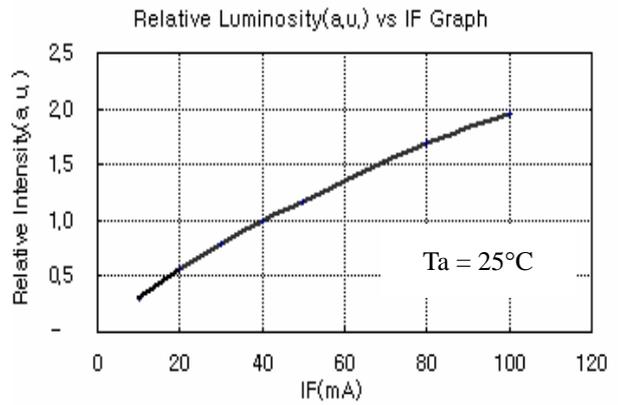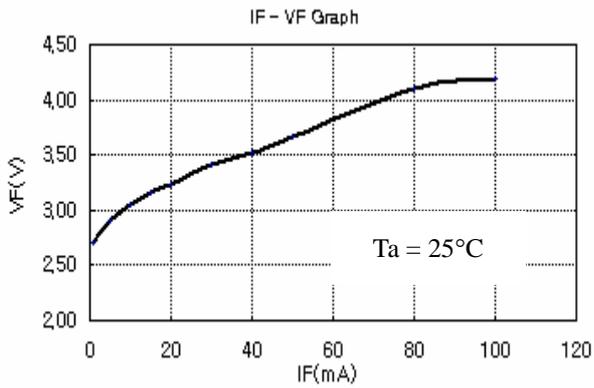

- VF : Forward Voltage(V), IF : Forward Current(m A), Ta : Ambient Temperature(°C)

Directivity

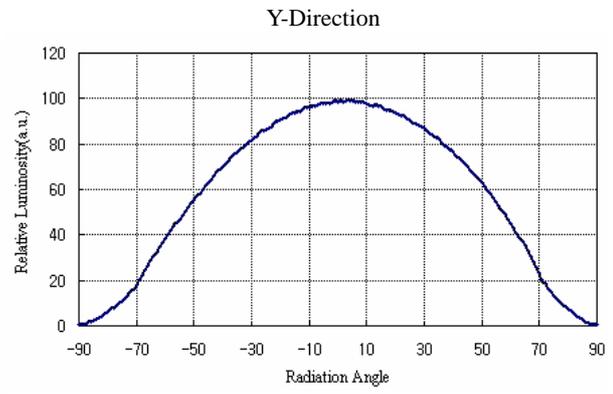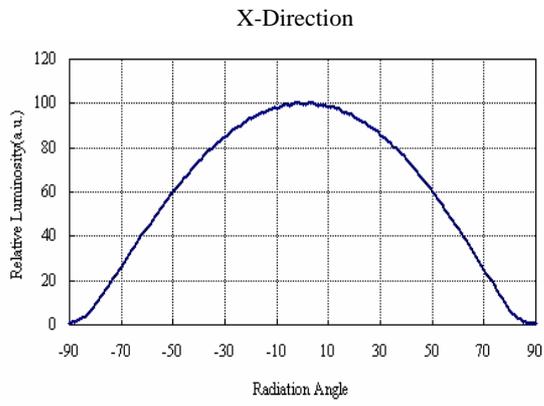

Lumimicro 3528 – One Chip Specification

Reliability Results

	ITEMS	CONDITION	NOTE	Fail/sample
1	RESISTANCE TO SOLDERING HEAT (REFLOW SOLDERING)	TSID=260 ,10SEC (PRE TREATMENT 30 , 70%, 168hrs)	2TIMES	0/20
2	SOLDERBILITY (REFLOW SOLDERING)	TSID=215 ± 5 ,3SEC (LEAD SOLDER)	TIMEOVER 95	0/20
3	THERMAL SHOCK	-20 ~ 100 , 15min AT EACH TEMP.	20CYCLES	0/20
4	MOISTURE RESISTANCE CYCLE	25 ~ 65 ~ -10 , 90%RH 24hrs/1Cycle	500HRS	0/20
5	HIGH TEMPERATURE STORAGE	Ta = 100	500HRS	0/20
6	TEMPERATURE HUMIMDITY STORAGE	Ta = 60 , RH=90%	500HRS	0/20
7	LOW TEMPERATURE STORAGE	Ta= -40	500HRS	0/20
8	LIFE TIME 1	20mA @ ROOM TEMP	500HRS	0/20
9	LIFE TIME 2	15mA @ 60 , 90%RH	500HRS	0/20
10	LIFE TIME 3	20mA @ -40	500HRS	0/20
11	ON / OFF TEST	IF=60mA, Pulse Width 0.2sec, Duty Ratio 1/2	200,000Cycles	0/20

* Criteria For Failure


Item	Strnbol	Failure Criteria	
		Min	Max
Forward Voltage	VF	-	U.S.L*)×1.1
C.I.E. x,y	x,y	L.S.L*)×0.8	U.S.L*)×1.2
Luminous Intensity	IV	L.S.L*)×0.5	-

U.S.L*) : Upper Standard Level


L.S.L*) : Lower Standard Level

Recommended Pad Pattern

* Recommended Soldering Pad Size




Taping pocket Dimension

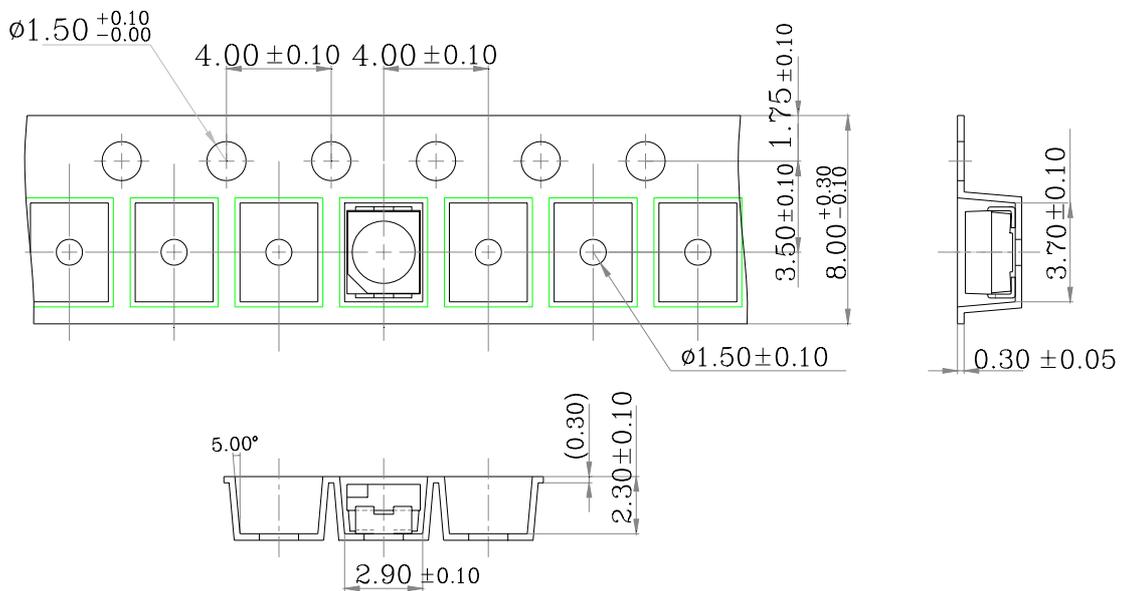


Lumimicro 3528 – One Chip Specification

Reel Dimensions

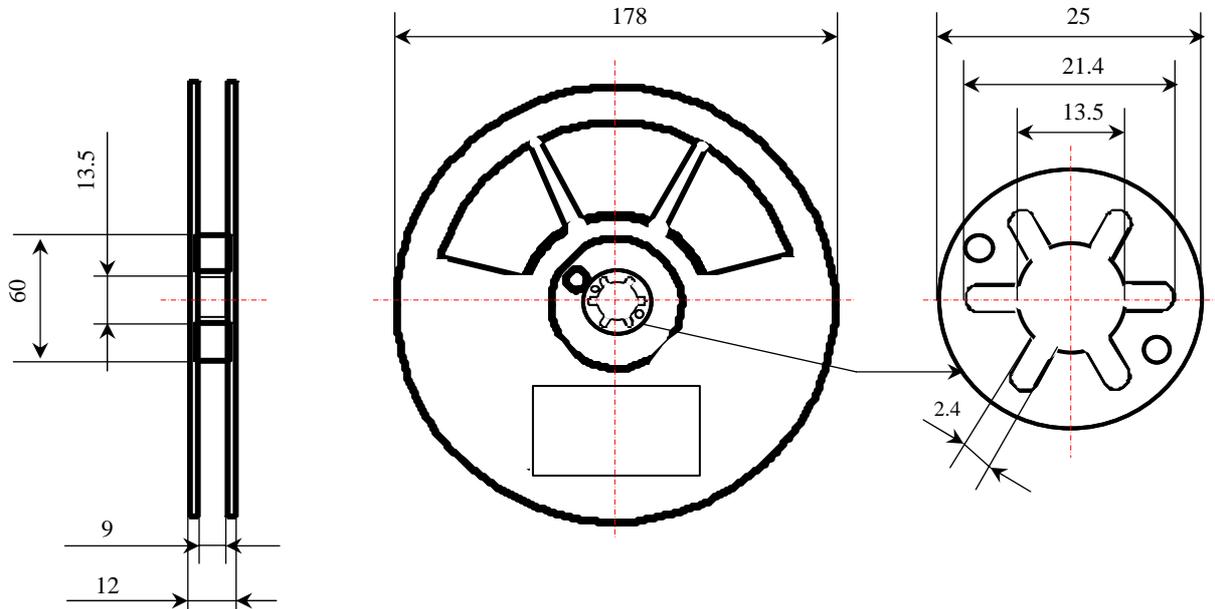

One Reel	Unit	Tolerance
Max 1,500EA	mm	0.1

Packing Spec

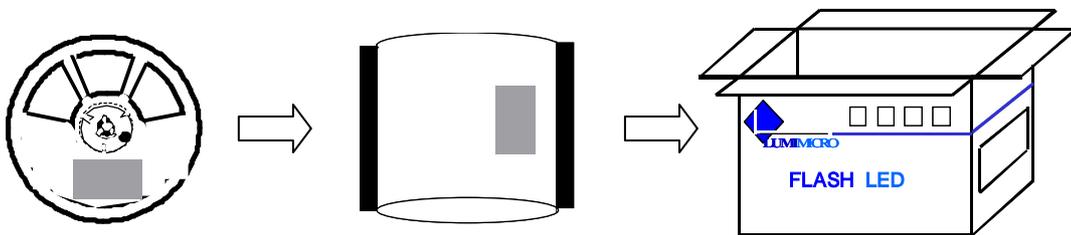

- Aluminum Bag

	Reel in a Bag	Silica in a Bag	Goods QNT in a Bag
Aluminum Bag	1 Reel	1 Silica	Max : 1,500ea

- Box Spec.

	Dimensions(Width/Thickness) Unit : mm	Reels in Box	Goods in QNT in Box
Box	275/ 285/ 200	10	Max : 15,000ea

Label Spec

LUMIMICRO	
P/N : LMFL2P35****	Model Name
Rank : ** - ** - **	Rank Name
Date :	Shipping Date
Qty :	Taping Quantity
 Lumimicro - Lot No : *** ** **	Lumimicro-Lot Number

Precautions For Use

This device should not be used in any type of fluid such as water, oil, organic solvent, etc.


When washing is required, IPA should be used.

When the LEDs are illuminating, operating current should be decided after considering the ambient maximum temperature.

LEDs must be stored to maintain a clean atmosphere. If the LEDs are stored for 3 months or more after being shipped from LUMIMICRO, sealed container with a nitrogen atmosphere should be used for storage.

The LEDs must be dip soldered within seven days after opening the moisture-proof packing. Repack unused Products with anti-moisture packing, fold to close any opening and then store in dry place. The appearance and specifications of the product may be modified for improvement without notice. These LEDs are sensitive to the static electricity and surge. It is recommended to use a wrist band or anti-electrostatic glove when handling the LEDs. If Over voltage which exceeds the absolute maximum rating is applied to LEDs, it will cause damage in LEDs and result in destruction. Damaged LEDs will show some unusual characteristics such as remarkably increased leak current, turn-on voltage becomes lower and the LEDs get unlighted at low current.

Soldering Condition

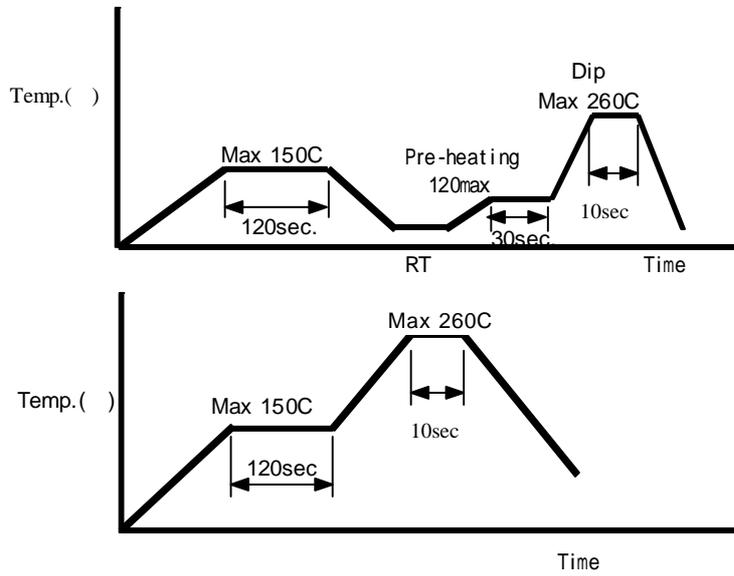

Solder Dip Conditions

The Immersion of leads into a solder bath @MAX260 shall be to 5 seconds max.

Reflow Conditions

Preliminary heating to be at 150 max. for 2 minutes max.
Soldering heat to be at 260 max. For 10 seconds max.

For Manual Soldering

Not more than 5 seconds @MAX300 , under Soldering iron.