


NZ-05 NIPPER



Ideal for removal of Chip Resistance, IC, etc on dense S.M.D.

- ESD-Safe handles made of thermoplastic elastomer (TPR) with strap holes
- With opening angle adjuster (Max.5mm)
- 1.5mm hex key wrench provided as a standard accessory to adjust an opening angle and fasten the screw
- With coiled spring

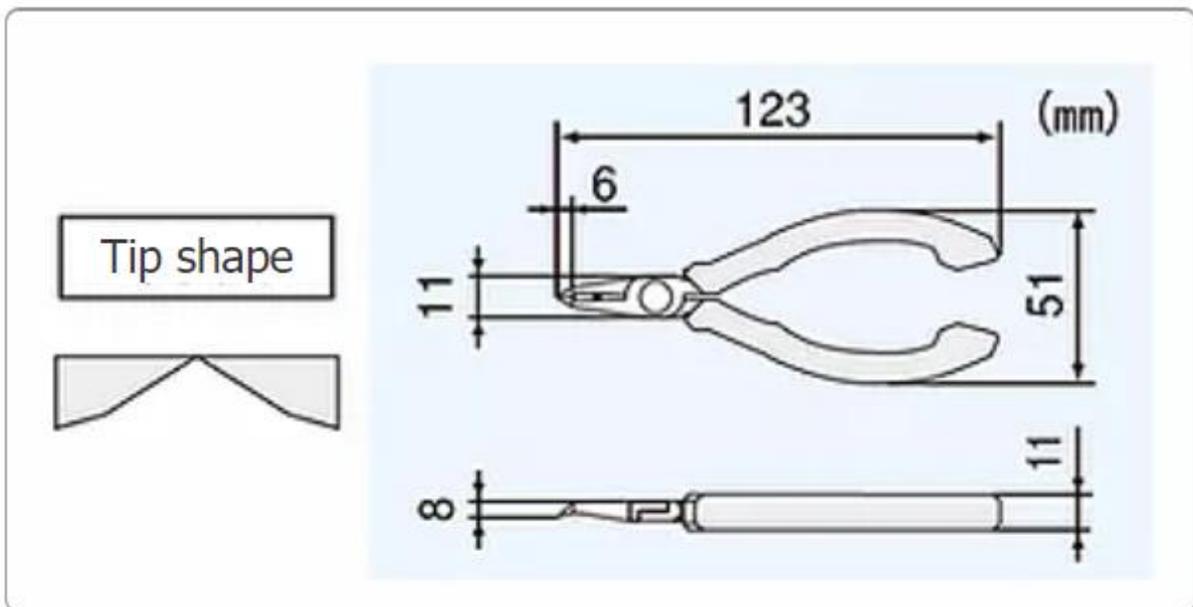

Item no.	Size	Material	Hardness	Cutting Capacity	Applications
NZ-03	122mm	S58C	HRC58±4	dia. 0.6mm (Copper Wire)	Removal of chip resistance, IC, etc. on SMD
NZ-05	123mm				Leads of dual In-Line package or single In-Line package IC on SMD