
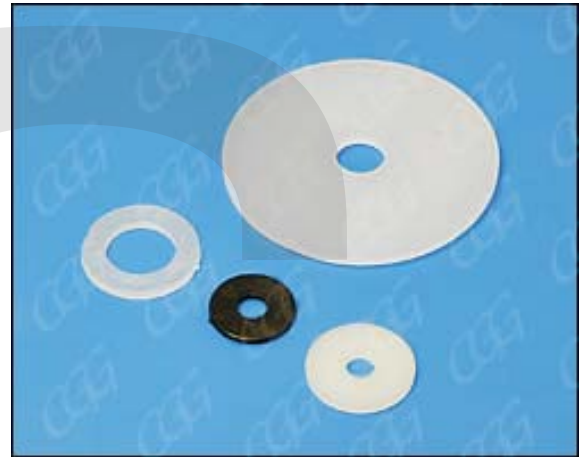


## Washer and Screws Series

### KLS8-0223 WASHER Series

Material: UL approved Nylon 66, 94V-2 and PBT

Unit:mm

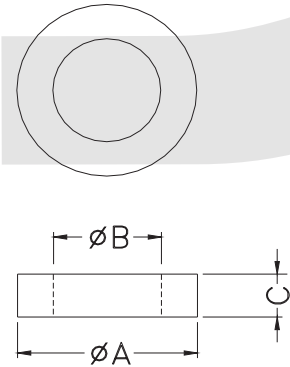

Inner Diameter øB	Outer Diameter øA	Thic-kness C	Pack-aging
1.2	3.5	0.3	2000
1.5	3.5	0.3	
1.7	4.2	0.3	
2.0	4.0	0.3	
2.0	8.0	0.5	
2.0	16.0	0.5	
2.1	4.2	0.3	
2.1	8.2	0.3	
2.1	4.2	0.5	
2.1	4.8	0.5	
2.1	8.2	0.5	
2.5	6.0	0.5	
2.6	4.7	0.3	
2.6	4.5	0.4	
2.6	4.7	0.5	
3.0	6.0	3.4	
3.1	6.0	0.5	
3.1	8.0	0.5	
3.1	8.0	0.8	
3.1	8.0	1.0	
3.1	7.0	1.1	
3.1	8.0	1.5	
3.1	6.0	2.0	
3.1	8.0	2.0	
3.2	5.2	0.5	

Inner Diameter øB	Outer Diameter øA	Thic-kness C	Pack-aging
3.2	7.0	0.5	2000
3.2	10.0	0.5	
3.3	5.2	0.4	
3.3	7.0	0.5	
3.3	5.3	0.8	
3.3	6.2	0.8	
3.4	7.0	0.5	
3.7	8.0	0.3	
4.1	8.0	0.5	
4.1	8.0	0.8	
4.1	8.0	1.0	
4.1	8.0	1.5	
4.1	6.5	0.3	
4.1	6.5	0.5	
4.1	8.0	2.0	
4.2	8.2	0.3	
4.2	7.5	0.3	
4.2	8.2	0.5	
4.2	10.0	0.5	
4.2	6.8	1.0	
4.3	8.0	0.4	
4.3	8.0	0.8	
4.6	7.2	0.3	
5.0	8.0	0.5	
5.2	10.0	0.3	

Inner Diameter øB	Outer Diameter øA	Thic-kness C	Pack-aging
5.2	10.0	0.4	2000
5.2	13.0	0.5	
5.2	10.0	1.0	
5.3	10.0	0.5	
5.3	11.8	0.7	
5.6	11.7	0.8	
6.2	9.5	0.3	
6.3	10.0	0.3	
6.3	10.0	0.3	
6.3	10.0	0.5	
6.4	12.8	0.8	
7.1	15.0	1.0	
7.2	10.3	0.3	
7.2	10.3	0.5	
7.2	12.0	0.5	
7.8	12.0	0.2	
8.2	12.0	0.5	
8.2	18.0	1.0	
10.0	16.0	1.5	
10.2	15.0	0.3	
10.2	15.0	0.5	
13.0	23.0	2.0	
40.0	45.5	1.5	

## ORDER INFORMATION

KLS8-0223 - A\*B\*C

