


KFH-M3-8ET

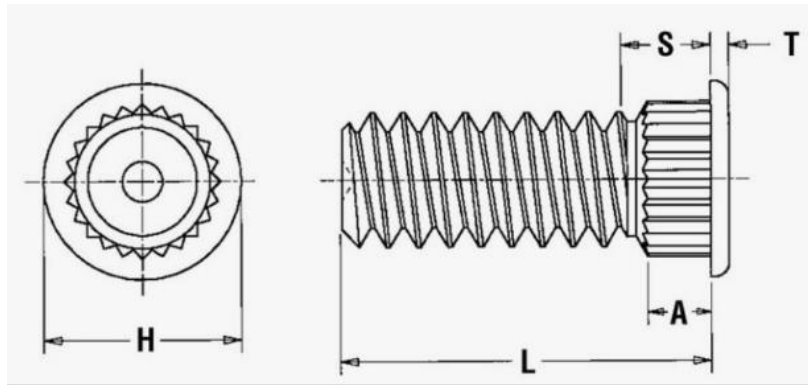

THREAD SIZE X PITCH	M3 x 0.5	A SHANK MAX	1.65mm
THREAD SPECIFICATION	6g, ASME B1.13M, External	H PLUS MINUS 025 MM	4.58mm
FASTENER MATERIAL	CDA-510 Phosphor Bronze	HOLE SIZE IN SHEET + 0.08_MM	3mm
STANDARD FINISH	Annealed, ASTM B545, Class B with Preservative Coating, Electro-Plated Tin	L - LENGTH ± 0.25_MM	8mm
FOR USE IN SHEET HARDNESS	HRB 55 / HB 83 or Less PC Board	MAX. HOLE SIZE IN ATTACHED PARTS_MM	3.70mm
PRODUCT CATEGORY	Broaching Studs - Type KFH	MIN. DIST. HOLE C/L TO EDGE_MM	3.80mm
CAD SUPPLIER	PennEngineering® (PEM®)	MIN. SHEET THICKNESS_MM	1.53mm
CADPARTID	103745	S MAX_MM	2.30mm
APPLICATION TYPE	Automotive, Automotive Electronics, Datacom, Telecom	T ± 0.13_MM	0.51mm
BASE PANEL MATERIAL	PC Board		
BRAND	PEM		