


KFH-M3-12ET

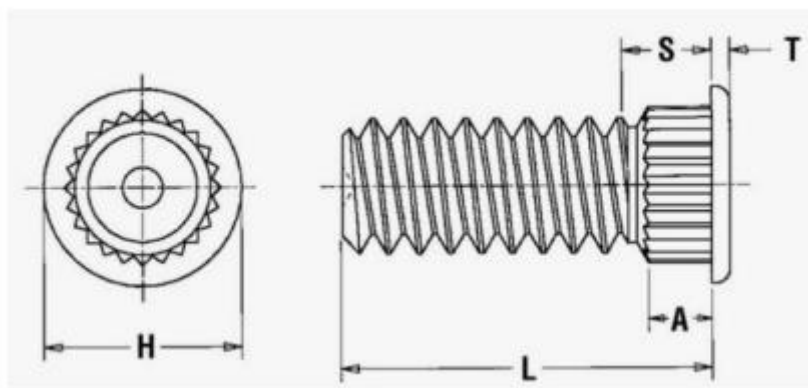

Specifications

Thread Size x Pitch	M3 x 0.5
L - Length ± 0.25	12 mm
A (Shank) Max.	1.65 mm
Min. Sheet Thickness	1.53 mm
Hole Size in Sheet + 0.08	3 mm
Max. Hole Size in Attached Parts	3.70 mm
H ± 0.25	4.58 mm
S Max.	2.30 mm
T ± 0.13	0.51 mm
Min. Dist. Hole C/L to Edge	3.80 mm
For Use in Sheet Hardness¹	HRB 55 / HB 83 or Less PC Board
Thread Specification	External, ASME B1.13M, 6g
Fastener Material	CDA-510 Phosphor Bronze Electro-Plated Preservative
Standard Finish	Tin, ASTM Coating, B545, Class B Annealed with
CAD Supplier	PennEngineering® (PEM®)