



KSD-800



Industrial 8-Port L2 Fast Ethernet Switches with Fiber Connectivity

Panel Mounting Bracket
KSD-8PB



EMI EMS Safety Environmental Tests:

Test	Standard	Specifications
FCC/EMI	FCC Rule Part 15	Class A
CE/EMC/EMI	EN55022, CISPR 22	Class A
CE/EMC/Harmonic	EN 61000-3-2	< 75 W
CE/EMC/VFF	EN 61000-3-3	Clause 5
CE/EMC/EMS	EN 55024	
ESD Test	IEC 61000-4-2	Contact: +/-8KV Air: +/-16KV
RS Test	IEC 61000-4-3	Strength: 10V/m
EFT/BURST	IEC 61000-4-4	+/-4KV
Surge Immunity	IEC 61000-4-5	Power: 4KV Signal: 0.5KV
CS Test	IEC 61000-4-6	Level 3
Magnetic Field Imm.	IEC 61000-4-8	50Hz 40A/m
Voltage Dips Imm.	IEC 61000-4-11	Interruption: C Dips: B
Safety	IEC 60950, IEC 60950	
Dielectric Voltage	IEEE 802.3	TP, 1500VAC/60sec.
Insulation Resistance	IEEE 802.3	TP, 500VDC/10Mohm
Cold Test	IEC 60068-2-1 Ad	-20°C, 96hrs
Dry Heat Test	IEC 60068-2-2 Bd	+70°C, 40%RH, 96hrs
Damp Heat Test	IEC 60068-2-3 Ca	+60°C, 90%RH, 96hrs
Storage Test	IEC 60068-2-48	-20°C, 96hrs +85°C, 40%RH, 96hrs
Vibration Test	IEC 60068-2-64 Fh	10-200Hz, 0.1g ² /Hz 200-500Hz, 0.03g ² /Hz

Benefits:

- Fast Ethernet switch with 8 10/100Mbps copper ports and optional fiber ports
- Wide operating temperature range for temperature critical environment
- Support DIN-Rail mounting and panel mounting
- Provide two power input types to meet more application needs
- Accept wide power input voltage range for application flexibility
- Industrial-rated Emission and Immunity performance

Key Features:

- 8 10/100M ports support auto-negotiation and auto-MDI/MDI-X configuration
- Port 7 and Port 8 provide either copper or fiber connection (model dependent)
- Provides wire speed store-and-forward switching
- Supports IEEE 802.3x flow control for full-duplex operation
- Supports Back-pressure flow control for half-duplex operation
- Provides Far End Fault function on the fiber ports

Specifications:

Standard	IEEE 802.3 10Base-T, IEEE 802.3u 100Base-TX, 100Base-FX
Network Ports	8 RJ-45 10/100Mbps auto-negotiation, auto-MDI/MDI-X ports 2 100Mbps 100Base-FX ports (model dependent) (Port 7 and Port 8 provide dual connectivities, either copper or fiber.)
Network Cables	10Base-T: Cat. 3, 4, 5 or higher up to 100m 100Base-TX: Cat. 5 or higher up to 100m 100Base-FX: MMF 50/125µm 60/125µm, SMF 9/125µm
MAC Addresses	Table with 1K entries
LEDs	Per unit: Power, Management Per 10/100M port: Link/Activity, 100M, Duplex/Collision status Per fiber port slot: Link/Activity status status
Relay Output	Alarm: Power failure Interface: 2 terminal contacts Spec.: 30VDC/1A max. or 120VAC/0.5A max.
DC Power Input	Screwed terminator block: 2 pairs of +/- contacts DC jack: -D 6.3mm/+D 2.0mm Operating voltage range: +7 ~ +30VDC
Power Consumption	7.3W max.
Housing	Enclosed metal with no fan
Dimension	40 x 106 x 140 mm (WxDxH)
Mounting Support	DIN-Rail Mounting, Panel Mounting

Ordering Information:

Model KSD-800-xxx	FX Ports	Ref. Distance	Operating Temperature
-1T	FX8 ST MMF	2km	-20 ~ 70°C
-1C	FX8 SC MMF	2km	-20 ~ 70°C
-1SL2	FX8 SC SMF	20km	-20 ~ 70°C
-2T	FX7 ST MMF FX8 ST MMF	2km 2km	-20 ~ 70°C
-2C	FX7 SC MMF FX8 SC MMF	2km 2km	-20 ~ 70°C
-2SL2	FX7 SC SMF FX8 SC SMF	20km 20km	-20 ~ 70°C
-2SL3	FX7 SC SMF FX8 SC SMF	30km 30km	-20 ~ 70°C
-CSL2	FX7 SC MMF FX8 SC SMF	2km 20km	-20 ~ 70°C

Environment Operating Temperature: -20°C ~ 70°C
 Storage Temperature: -20°C ~ 85°C
 Relative Humidity: 5% ~ 95% non-condensing

Approval FCC Class A, CE mark Class A, EN60950-1 safety

Fiber Optical Specifications:


Model	FX & Cable	Wavelength	Tx Power*	Rx Sens.	Rx Max.
-1T	FX8: ST MMF	1310nm	-20 ~ -14 dBm	-32dBm	-8dBm
-1C	FX8: SC MMF	1310nm	-20 ~ -14 dBm	-31dBm	0dBm
-1SL2	FX8: SC SMF	1310nm	-15 ~ -8 dBm	-30dBm	-7dBm
-2T	FX7: ST MMF FX8: ST MMF	1310nm 1310nm	-20 ~ -14 dBm -20 ~ -14 dBm	-32dBm -32dBm	-8dBm -8dBm
-2C	FX7: SC MMF FX8: SC MMF	1310nm 1310nm	-20 ~ -14 dBm -20 ~ -14 dBm	-31dBm -31dBm	0dBm 0dBm
-2SL2	FX7: SC SMF FX8: SC SMF	1310nm 1310nm	-15 ~ -8 dBm -15 ~ -8 dBm	-30dBm -30dBm	-7dBm -7dBm
-2SL3	FX7: SC SMF FX8: SC SMF	1310nm 1310nm	-15 ~ -8 dBm -15 ~ -8 dBm	-34dBm -34dBm	0dBm 0dBm
-CSL2	FX7: SC MMF FX8: SC SMF	1310nm 1310nm	-20 ~ -14 dBm -15 ~ -8 dBm	-31dBm -30dBm	0dBm -7dBm

*Data for 62.5/125µm MMF, 9 /125µm SMF




Katron Technologies Inc.
 15F-7, No. 79, Sec. 1, Hsin Tai Wu Rd.,
 Hsi-chih District, New Taipei City, Taiwan
 Tel: 886-2-2698-3878
 Fax: 886-2-2698-3873
 E-mail: kti@ktinet.com.tw
 URL: <http://www.ktinet.com.tw>

Trademarks: All brand names are trademarks or registered trademarks of their respective holders.
 This information is subject to change without prior notice.

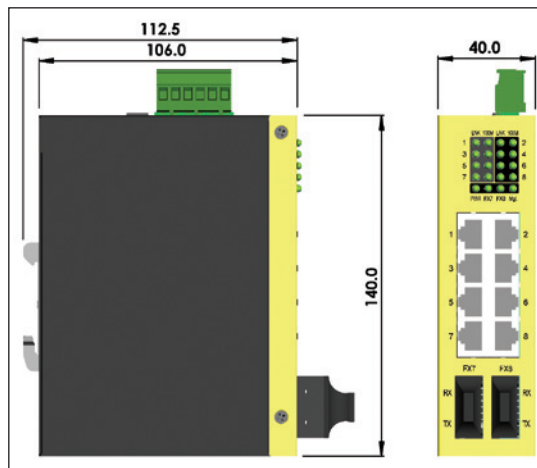

DIN-Rail Dimension

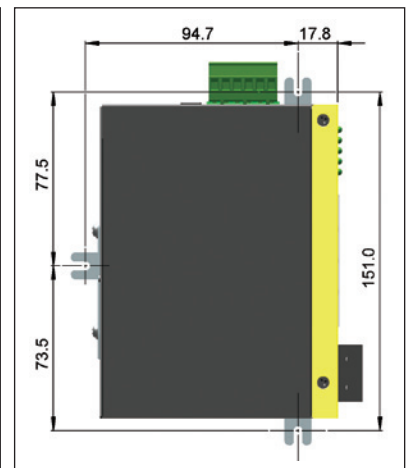

Panel Dimension