





NON-SPILLABLE SEALED RECHARGEABLE BATTERY

CB12600 12V, 60.0Ah

☆ SPECIFICATION	☆ CHARACTERISTICS
● NOMINAL VOLTAGE : 12 V	● CAPACITY 25 °C / 77 °F
● NOMINAL CAPACITY(20 hrs) : 60.0 Ah	20 hr @ 3 A : 60 Ah
● DIMENSIONS	10 hr @ 5.4 A : 54 Ah
TOTAL HEIGHT : 228 mm (8.98 inches)	5 hr @ 9.6 A : 48 Ah
CONTAINER HEIGHT : 207 mm (8.15 inches)	1 hr @ 36 A : 36 Ah
LENGTH : 229 mm (9.02 inches)	1 C @ 60 A : 30 Ah
WIDTH : 138 mm (5.43 inches)	● INTERNAL RESISTANCE(25°C , 77 °F) : 10 mΩ
WEIGHT : APPROX 18.5 kg (40.8 lbs)	● CHARGING VOLTAGE (25°C , 77 °F)
● MAX DISCHARGE CURRENT : 480 A (5 sec)	STANDBY USE : 2.275 ± 0.025 V/CELL
● MAX SHORT- DURATION DISCHARGE CURRENT : 1200 A(0.1 sec)	: (-3.3mV / °C / CELL)
● STANDARD TERMINALS : FP-22 / FP-14, FP-15 / RT-38	CYCLE USE : 2.45 ± 0.05 V/CELL
● CONTAINER MATERIAL : GENERAL GRADE ABS	: (-5 mV / °C / CELL)
● DESIGN LIFE FOR STANDBY USE AT 20°C(68°F): 10 YEARS	● MAX CHARGING CURRENT : 18 A

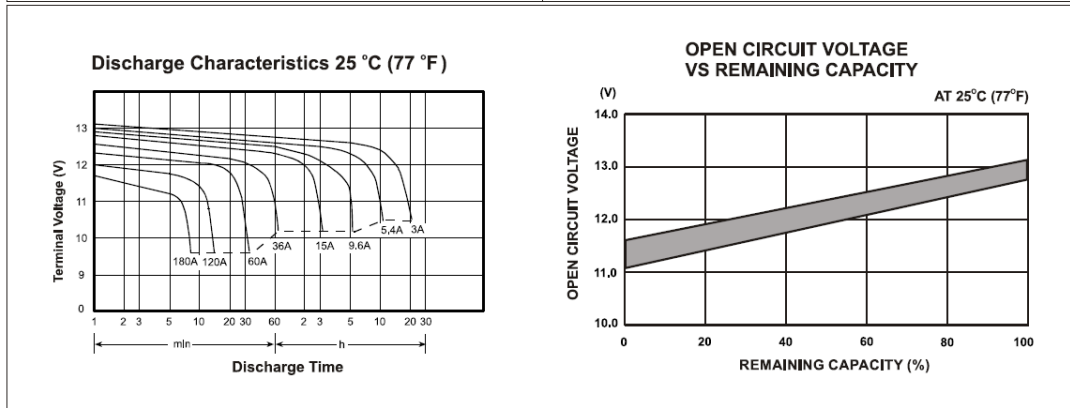

☆ Dimensions

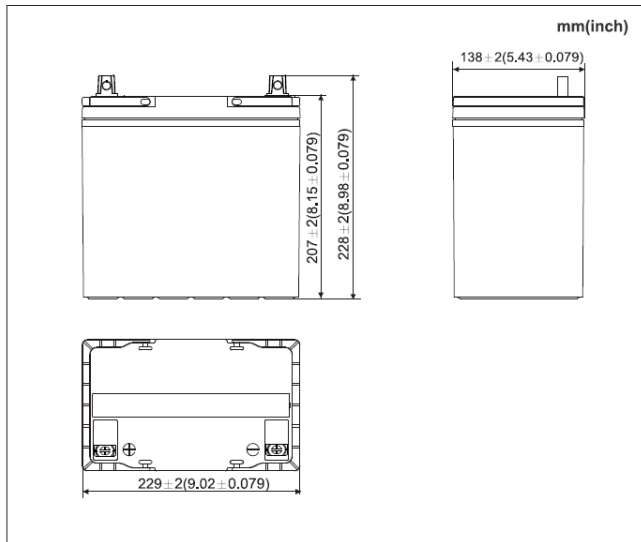

☆ Terminal

