




NON-SPILLABLE SEALED RECHARGEABLE BATTERY


CB12800 12V, 80.0Ah

☆ SPECIFICATION	☆ CHARACTERISTICS
● NOMINAL VOLTAGE : 12 V	● CAPACITY 25 °C / 77 °F
● NOMINAL CAPACITY(20 hrs) : 80.0 Ah	20 hr @ 4 A : 80 Ah
● DIMENSIONS	10 hr @ 7.2 A : 72 Ah
TOTAL HEIGHT : 227 mm (8.94 inches)	5 hr @ 12.8 A : 64 Ah
CONTAINER HEIGHT : 208 mm (8.19 inches)	1 hr @ 48 A : 48 Ah
LENGTH : 259 mm (10.20 inches)	1 C @ 80 A : 40 Ah
WIDTH : 168 mm (6.61 inches)	● INTERNAL RESISTANCE(25°C , 77 °F) : 7.5 mΩ
WEIGHT : APPROX 26.5 kg (58.42 lbs)	● CHARGING VOLTAGE (25°C , 77 °F)
● MAX DISCHARGE CURRENT : 640 A (5 sec)	STANDBY USE : 2.275 ± 0.025 V/CELL
● MAX SHORT-DURATION DISCHARGE CURRENT : 1600 A(0.1 sec)	: (-3.3mV / °C / CELL)
● STANDARD TERMINALS : FP-16, FP-17 / FP-24 / RT-07	CYCLE USE : 2.45 ± 0.05 V/CELL
● CONTAINER MATERIAL : GENERAL GRADE ABS	: (-5 mV / °C / CELL)
● DESIGN LIFE FOR STANDBY USE AT 20°C(68°F): 10 YEARS	● MAX CHARGING CURRENT : 24 A


Discharge Characteristics 25 °C (77 °F)

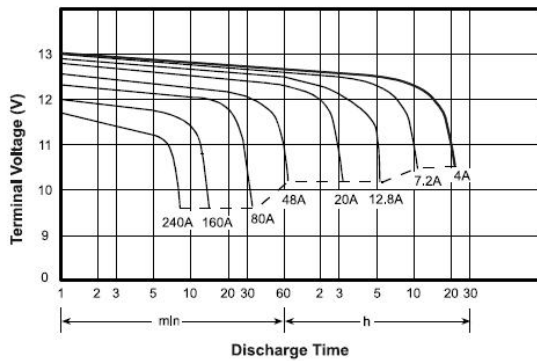

OPEN CIRCUIT VOLTAGE VS REMAINING CAPACITY

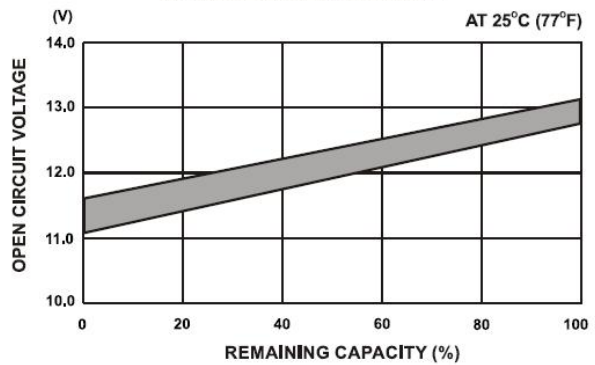

☆ Dimensions

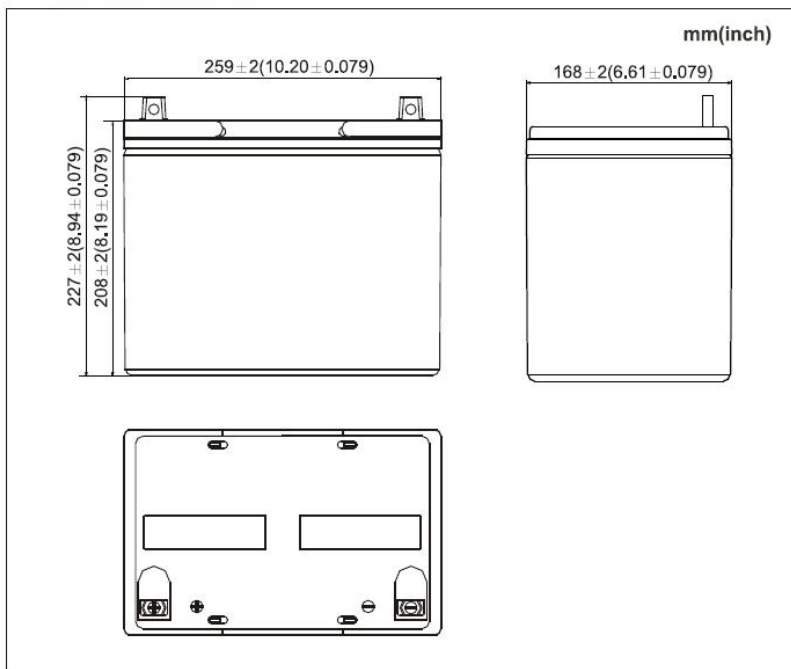

☆ Terminal

