




NON-SPILLABLE SEALED RECHARGEABLE BATTERY


CB12650E 12V,65.0Ah

☆ SPECIFICATION	☆ CHARACTERISTICS
● NOMINAL VOLTAGE : 12 V	● CAPACITY 25 °C / 77 °F
● NOMINAL CAPACITY(20 hrs) : 65 Ah	20 hr @ 3.25 A : 65 Ah
● DIMENSIONS	10 hr @ 5.85 A : 58.5 Ah
TOTAL HEIGHT : 228 mm (8.98 inches)	5 hr @ 10.4 A : 52 Ah
CONTAINER HEIGHT : 207 mm (8.15 inches)	1 hr @ 39A : 39 Ah
LENGTH : 229 mm (9.02 inches)	1 C @ 65 A : 32.5 Ah
WIDTH : 138 mm (5.43 inches)	● INTERNAL RESISTANCE(25°C , 77 °F) : 10 mΩ
WEIGHT : APPROX 18.5 kg (40.8 lbs)	● CHARGING VOLTAGE (25°C , 77 °F)
● MAX DISCHARGE CURRENT : 520 A (5 sec)	STANDBY USE : 2.275±0.025 V/CELL
● MAX SHORT- DURATION DISCHARGE CURRENT : 1300 A(0.1 sec)	: (-3.3mV / °C / CELL)
● STANDARD TERMINALS : FP-22 / FP-14, FP-15 / RT-38	CYCLE USE : 2.45 ±0.05 V/CELL
● CONTAINER MATERIAL : GENERAL GRADE ABS	: (-5 mV / °C / CELL)
● DESIGN LIFE FOR STANDBY USE AT 20°C(68°F): 10 YEARS	● MAX CHARGING CURRENT : 19.5 A


Discharge Characteristics 25 °C (77 °F)

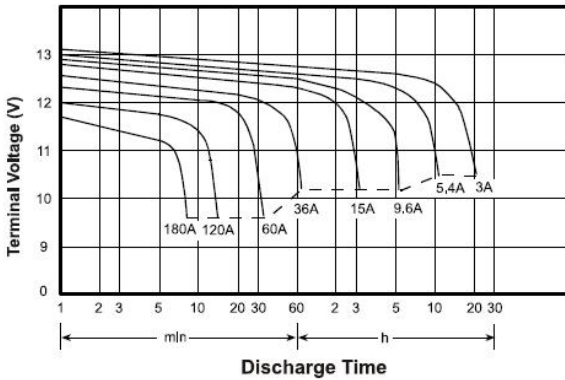

OPEN CIRCUIT VOLTAGE VS REMAINING CAPACITY

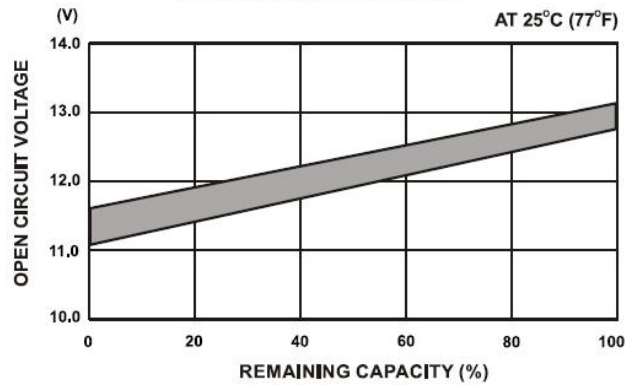

☆ Dimensions

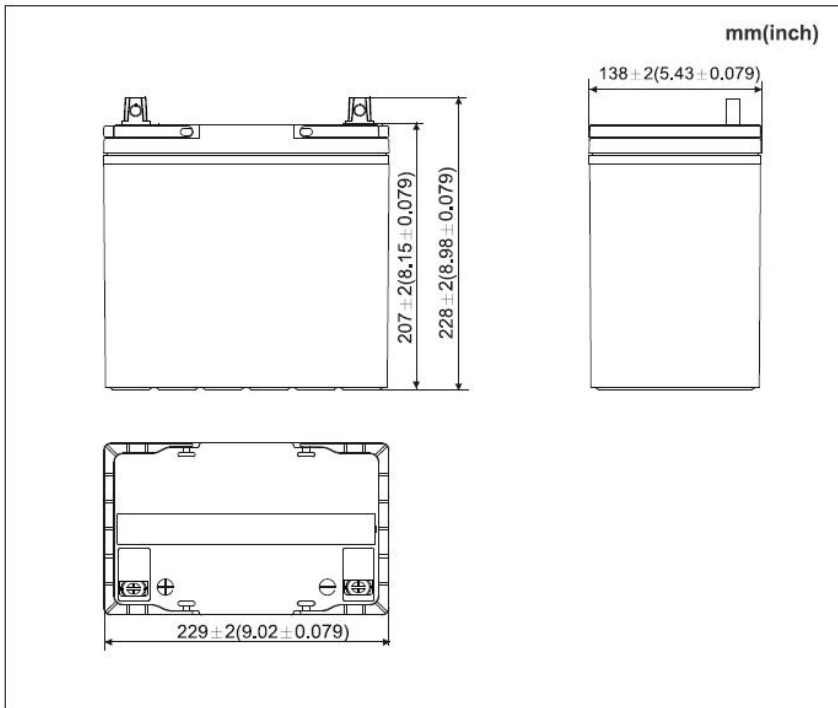

☆ Terminal

