




NON-SPILLABLE SEALED RECHARGEABLE BATTERY


CB1295 12V, 9.5AH

| ☆ SPECIFICATION | ☆ CHARACTERISTICS |
|---|---|
| ● NOMINAL VOLTAGE : 12 V | ● CAPACITY 25 °C / 77 °F |
| ● NOMINAL CAPACITY(20 hrs) : 9.5 Ah | 20 hr @ 0.475 A : 9.5 Ah |
| ● DIMENSIONS | 10 hr @ 0.855A : 8.55 Ah |
| TOTAL HEIGHT : 118 mm (4.65 inches) | 5 hr @ 1.52 A : 7.6 Ah |
| CONTAINER HEIGHT : 112 mm (4.41 inches) | 1 hr @ 5.7 A : 5.7 Ah |
| LENGTH : 151 mm (5.95 inches) | 1 C @ 9.5 A : 4.75 Ah |
| WIDTH : 65 mm (2.56 inches) | ● INTERNAL RESISTANCE(25°C , 77 °F) : 23 mΩ |
| WEIGHT : APPROX 3.28 kg (7.23 lbs) | ● CHARGING VOLTAGE (25°C , 77 °F) |
| ● MAX DISCHARGE CURRENT : 95 A (5 sec) | STANDBY USE : 2.275 0.025 V/CELL |
| ● MAX SHORT- DURATION DISCHARGE CURRENT : 285A(0.1 sec) | : (-3.3mV / °C / CELL) |
| ● STANDARD TERMINALS : FO-02/FO-03 | CYCLE USE : 2.45 0.05 V/CELL |
| ● CONTAINER MATERIAL : GENERAL GRADE ABS | : (-5 mV / °C / CELL) |
| | ● MAX CHARGING CURRENT : 2.85 A |


Discharge Characteristics 25 °C (77 °F)

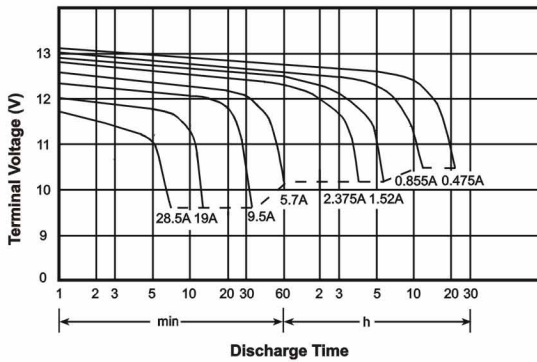

OPEN CIRCUIT VOLTAGE VS REMAINING CAPACITY

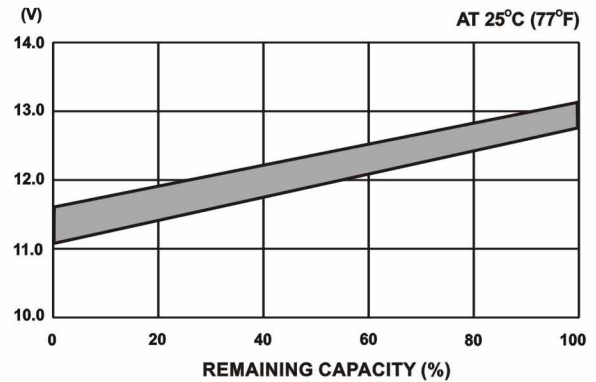

☆ Dimensions

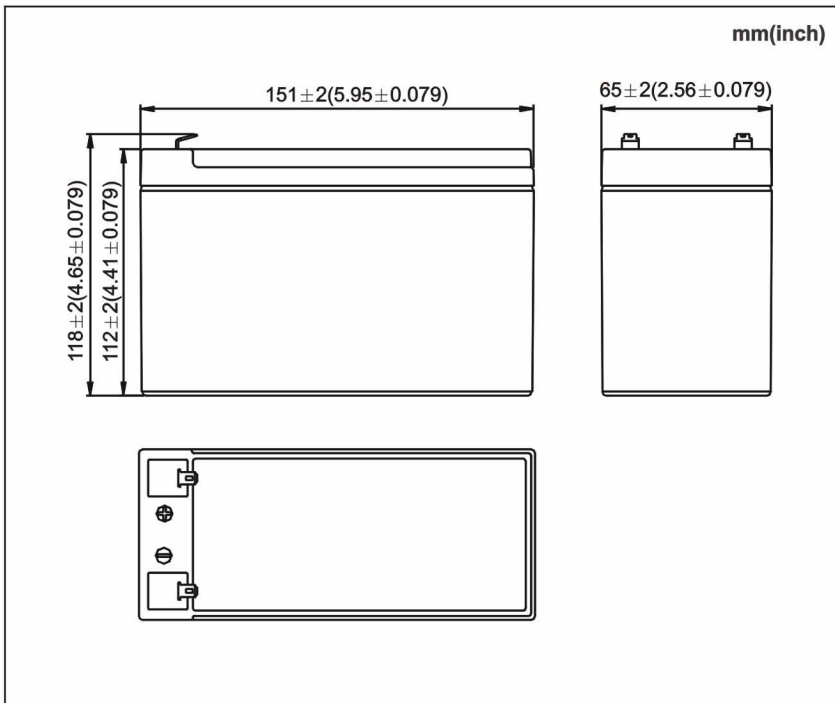

☆ Terminal

