





NON-SPILLABLE SEALED RECHARGEABLE BATTERY

CB12200 12V, 20.0Ah

☆ SPECIFICATION	☆ CHARACTERISTICS
● NOMINAL VOLTAGE : 12 V	● CAPACITY 25 °C / 77 °F
● NOMINAL CAPACITY(20 hrs) 20.0 Ah	20 hr @ 1.0 A : 20 Ah
● DIMENSIONS	10 hr @ 1.8 A : 18 Ah
TOTAL HEIGHT : 167 mm (6.58 inches)	5 hr @ 3.2 A : 16 Ah
CONTAINER HEIGHT : 167 mm (6.58 inches)	1 hr @ 12 A : 12 Ah
LENGTH : 181 mm (7.13 inches)	1 C @ 20 A : 10 Ah
WIDTH : 76 mm (3.0 inches)	● INTERNAL RESISTANCE(25°C , 77 °F) : 13 mΩ
WEIGHT : APPROX 5.85 kg (12.9 lbs)	● CHARGING VOLTAGE (25°C , 77 °F)
● MAX DISCHARGE CURRENT : 200 A (5 sec)	STANDBY USE : 2.275 ± 0.025 V/CELL
● MAX SHORT- DURATION DISCHARGE CURRENT : 600 A(0.1 sec)	: (-3.3mV / °C / CELL)
● STANDARD TERMINALS : FP-01/RT-11/FO-21	CYCLE USE : 2.45 ± 0.05 V/CELL
● CONTAINER MATERIAL : GENERAL GRADE ABS	: (-5 mV / °C / CELL)
● DESIGN LIFE FOR STANDBY USE AT 20°C(68°F): 10 YEARS	● MAX CHARGING CURRENT : 6 A

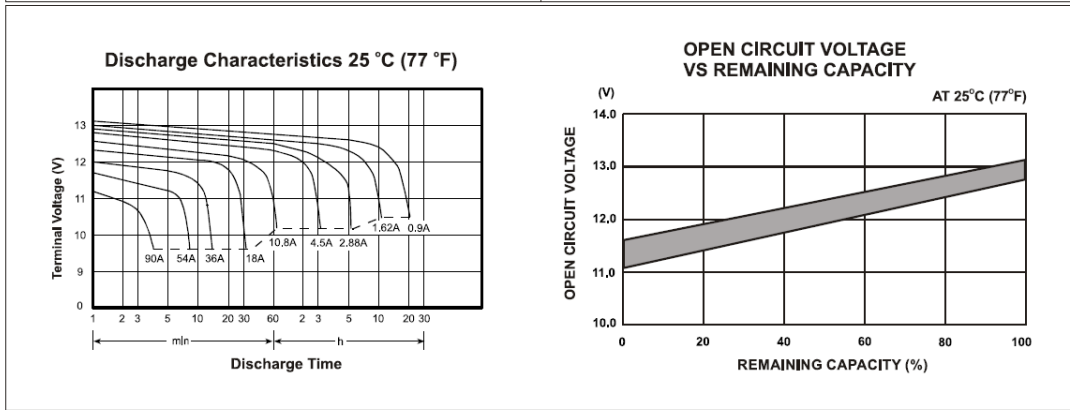

☆ Dimensions

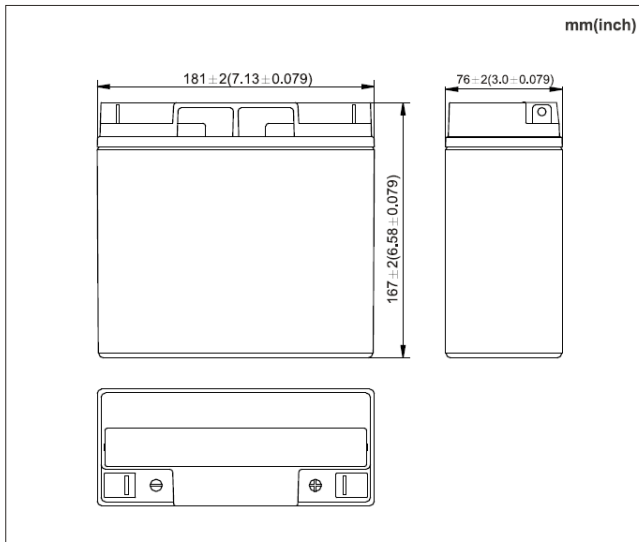

☆ Terminal

