
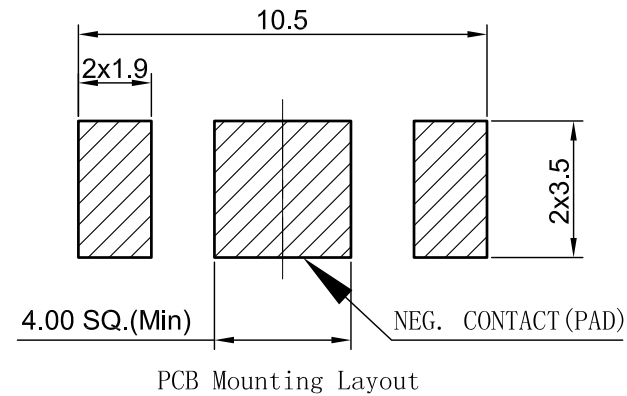
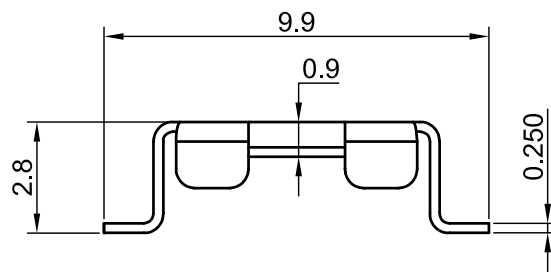
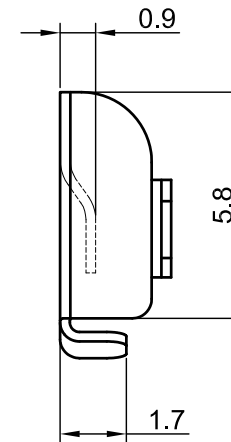


REV	DESCRIPTION	DATE
A0	INITIAL RELEASE	2016-02-13

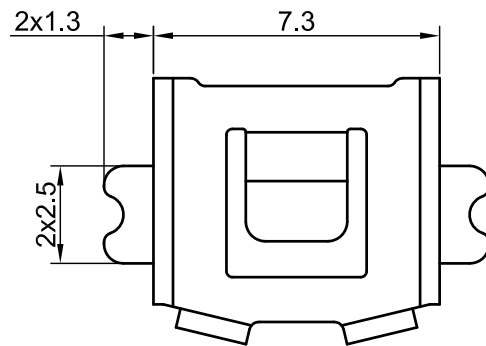

NOTES:

1. MATERIAL:

a. 0.25MM THICK PHOSPHOR BRONZE NICKEL PLATED

2. ELECTRIC:

a. CURRENT RATING : 3A (AC/DC)

b. DIELECTRIC VOLTAGE: 500V AC ONE SEC LEVEL

c. CONTACT RESISTANCE: 30 MILLIOHMS MAX

d. INSULATION RESISTANCE: 100 MILLIOHMS MIN

e. OPERATING TEMPERATRUE: -40° ~ +105°

f. STORAGE TEMPERATURE RANGE: -10°C ~ +55°C

g. HUMIDITY: 40° C AND 90-95% RH FOR 48 HOURS

3. RoHS COMPLIANT

KLS ELECTRONIC CO., LTD

UNLESS OTHERWISE SPECIFIED TOLERANCES		MATERIAL:	DESIGN BY	DATE	TITLE	
DECIMALS		SEE NOTES	Zhang jianbing	2016/01/12	BATTERY CLIP	
		FINISH:	CHECKED BY	DATE		
			Wang quchun	2016/01/12		
		SEE NOTES	APPROVED BY	DATE	DWG NO.	REVISION
			Zhu changyan	2016/01/12	L-KLS5-621-011	A0
these drawings and specifications are the property of MQC, are issued in strict confidence and shall not be reproduced, or copied, or used as the basis for the manufacture, or sale of apparatus without prior written permission						
X	: ±0.30	X	: ±3°			
X.X	: ±0.25	X.X	: ±1°			
X.XX	: ±0.20					
X.XXX	: ±0.10					
		THIRD-ANGLE PROJECTION				
		UNIT	SCALE		SHEET	
		MM	5:1		1 OF 1	