




- Note
- 1-100% Testes No Short of Break Circuit
 - 2-Storage condition:
Temp: $15^{\circ}\text{C} \sim 25^{\circ}\text{C}$
Humidity: $30 \sim 60\text{RH}\%$
 - 3-Conductor : $0.035 \times 0.3\text{mm}$
 - 4-Supporting Tapc: 0.225mm PET,BLUE
 - 5-Insulation: 0.043mm PET,White

Order Information

L-KLS17-FFC-0.5-XXP-LXXX A 4/8

- L: RoHS
- 0.5: Pitch 0.5mm
- XXP: Number of conductor
- XXX: Length 050=50mm 150=150mm
- A: Type
- 4/8: Strip Length/Supporting Tape Length

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	
X: ± 0.60	X: $\pm 5^{\circ}$		Description:	Pitch 0.5mm FFC Cable A Type	
.X: ± 0.38	.X: $\pm 3^{\circ}$	SHEET SIZE		A4	
.XX: ± 0.25	.XX: $\pm 2^{\circ}$	KLS P/N:		KLS17-FFC-0.5-XXP-LXXXA4/8	
Draw by: Date		KLS ELECTRONIC CO., LTD.			
Check by: Date					
SCALE					

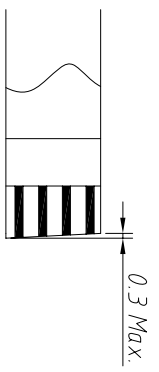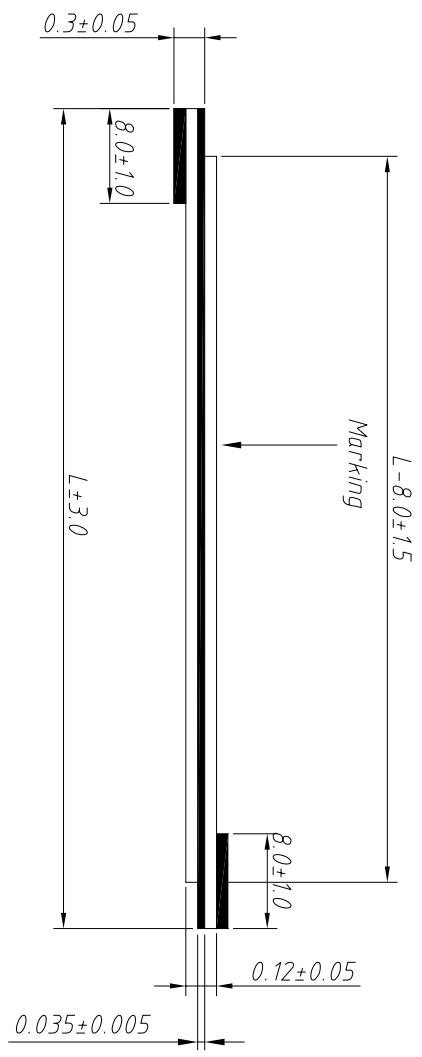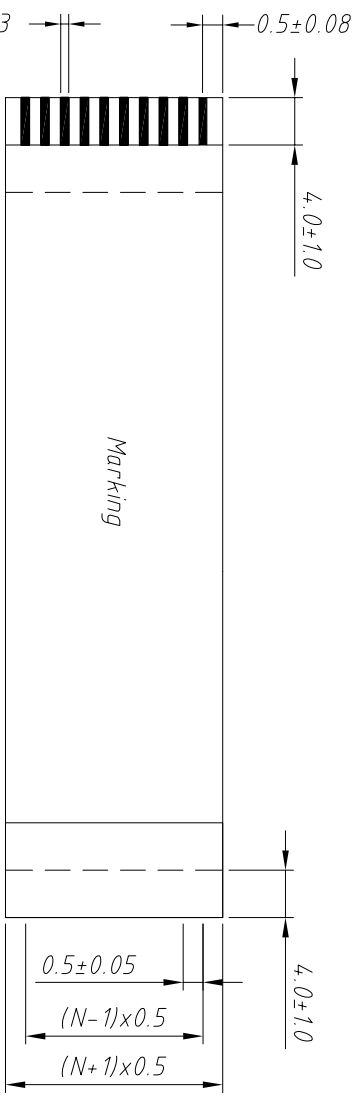


- Note
- 1-100% Testes No Short at Break Circuit
 - 2-Storage condition:
Temp: $15^{\circ}\text{C} \sim 25^{\circ}\text{C}$
Humidity: $30 \sim 60\text{RH}\%$
 - 3-Conductor : $0.035 \times 0.3\text{mm}$
 - 4-Supporting Tap: 0.225mm PET,BLUE
 - 5-Insulation: 0.043mm PET,White

Order Information


L-KLS17-FFC-0.5-XXP-LXXX B 4/8

- L: RoHS
- 0.5: Pitch 0.5mm
- XXP: Number of conductor
- XXX: Length 050=50mm 150=150mm
- B: Type
- 4/8: Strip Length/Supporting Tape Length

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	
X: ± 0.60	X: $\pm 5^{\circ}$		Description:	UNITS	mm
X: ± 0.38	X: $\pm 3^{\circ}$		Pitch 0.5mm FFC Cable B Type	SHEET SIZE	A4
XX: ± 0.25	XX: $\pm 2^{\circ}$	KLS P/N:		KLS17-FFC-0.5-XXP-LXXXB4/8	
Draw by: Date		KLS ELECTRONIC CO., LTD.			
Check by: Date					
SCALE	SHEET				

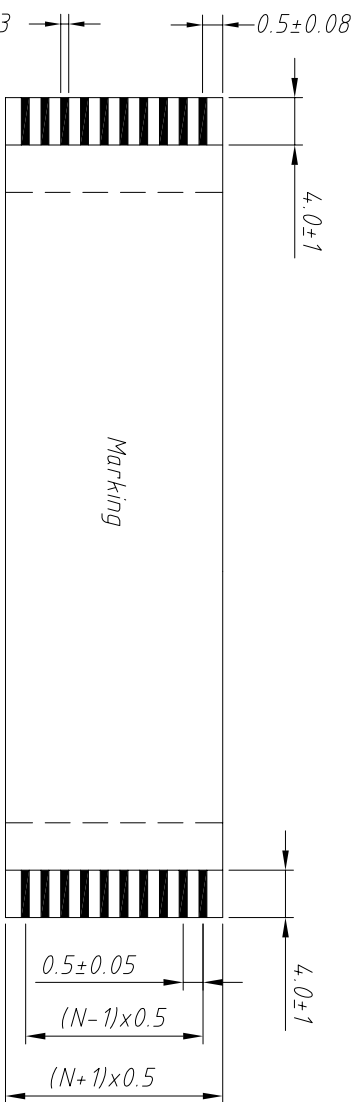


Note
 1-100% Testes No Short at Break Circuit
 2-Storage condition:
 Temp: 15°C ~ 25°C
 Humidity: 30 ~ 60RH%
 3-Conductor : 0.035×0.3mm
 4-Supporting Tapc: 0.225mm PET,BLUE
 5-Insulation: 0.043mm PET,White

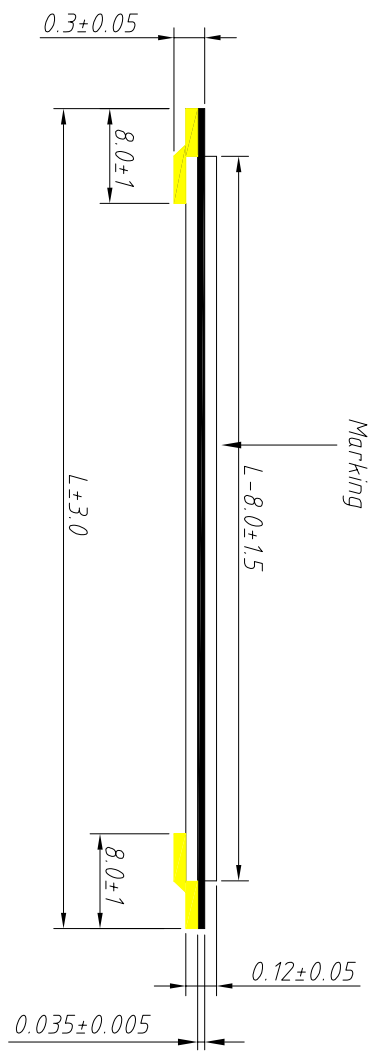

Order Information




L-KLS17-FFC-0.5-XXP-LXXX C 4/8

- L: RoHS
- 0.5: Pitch 0.5mm
- XXP: Number of conductor
- XXX: Length 050=50mm 150=150mm
- C: Type
- 4/8: Strip Length/Supporting Tape Length

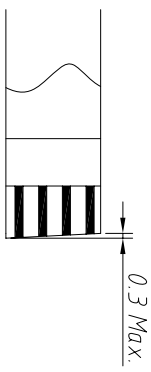

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	
X: ±0.60	X: ±5°	⊕	⊖	UNITS	mm
.X: ±0.38	.X: ±3°	SHEET SIZE	A4	Description:	Pitch 0.5mm FFC Cable C Type
.XX: ±0.25	.XX: ±2°	KLS P/N:	KLS17-FFC-0.5-XXP-LXXXC4/8		
Draw by: Date					
Check by: Date					
SCALE					

KLS ELECTRONIC CO., LTD.

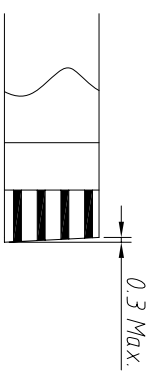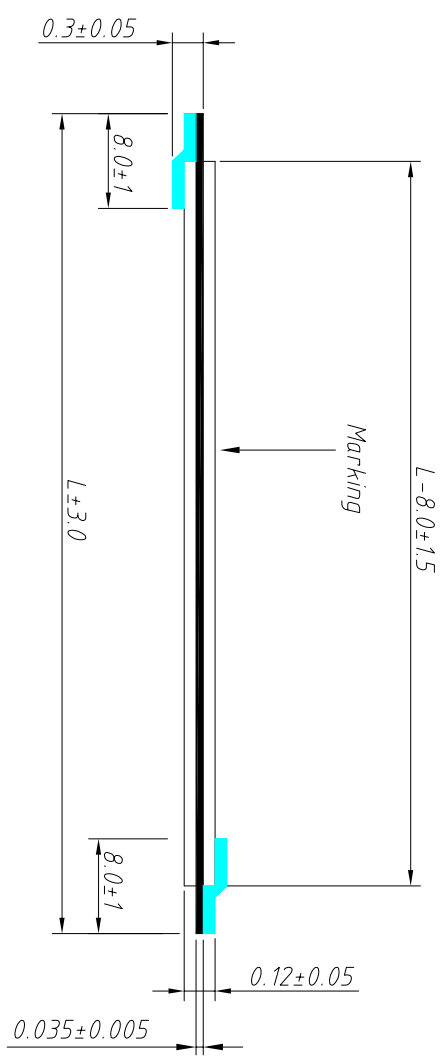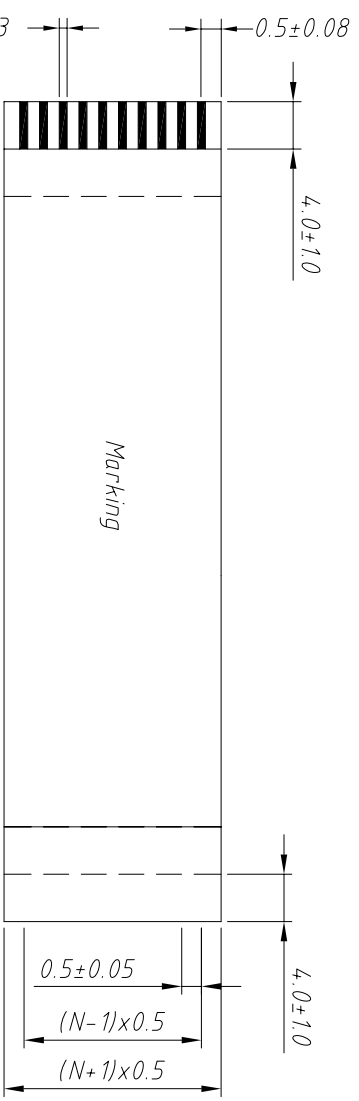

- Note
- 1-100% Testes No Short at Break Circuit
 - 2-Storage condition:
Temp: 15°C ~ 25°C
Humidity: 30 ~ 60RH%
 - 3-Conductor : 0.035×0.3mm
 - 4-Supporting Tape: 0.225mm PET,BLUE
 - 5-Insulation: 0.043mm PET,White

Order Information

L-KLS17-FFC-0.5-XXP-LXXX D 4/8

- L: RoHS
- 0.5: Pitch 0.5mm
- XXP: Number of conductor
- XXX: Length 050=50mm 150=150mm
- D: Type
- 4/8: Strip Length/Supporting Tape Length

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		Description:
X: ±0.60	X: ±0.38	X: ±5°	X: ±3°	UNITS	mm	
XX: ±0.25		XX: ±2°		SHEET SIZE	A4	Pitch 0.5mm FFC Cable D Type
Draw by: Date		Check by: Date		KLS P/N:		
SCALE		SHEET		KLS17-FFC-0.5-XXP-LXXXD4/8		

KLS ELECTRONIC CO., LTD.