

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 03/05/16'		

NOTES:


1. MAIN SPECIFICATIONS

- . Housing material: NYLON 66
- . Contact material: COPPER ALLOY
- . Wire range: AWG#26
- . Rated voltage: 250V
- . Rated current: 1A
- . Contact resistance:  $\leq 300m\Omega$
- . Insulation resistance:  $\geq 500M\Omega$
- . Withstanding voltage: 500V,AC 1 minute
- . Temperature range:  $-25 \sim +80^{\circ}C$

2. PRODUCT NUMBER CODE:

DS1066 - X X X X X X X - OZDISAN - 015

- Wire length(DIM.L)  
250: 250mm
- Contact Plating  
6: Tin
- Housing Color  
W: White
- Mounting type  
C: Crimp
- Wire range  
26: UL1007 26AWG
- Connector type  
F: Female
- No.of contact  
4

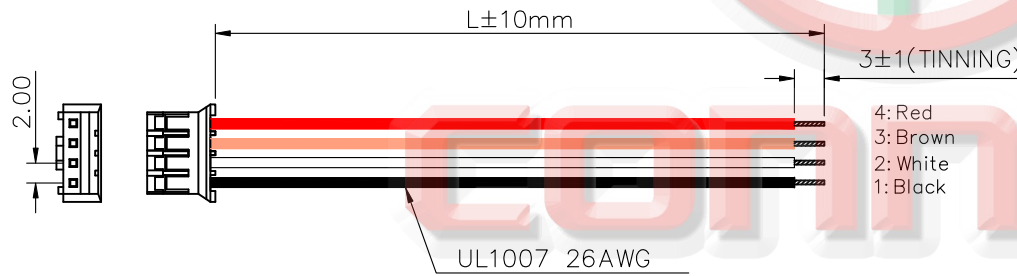

Tel:86-574-63508787

Fax:86-574-63510817

E-mail:sale@connfly.com

http://www.connfly.com

Add:East Industry Zone KuangYan

Town Cixi Ningbo China

P.C:315333

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE
X.	±0.60	X.	±5°	UNITS	mm	P.C.B CONNECTOR 2.0mm PH TYPE
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES DS1066 SERIES
.XX	±0.25	.XX	±2°			
DRAWING TYPE		CUSTOMER		晨翔电子有限公司 <b>CONNFLY CONNFLY ELECTRONIC CO. LTD</b>		
SCALE		1:1 SHEET 1 OF 1				
DRAWING NO.		C-DS1066-XXXXXX-A				

**FOR OZDISAN ONLY**