


VIEW	TOLERANCE	
	0-10	±1
	11-250	±5
UNIT: mm	251-500	±10
	501-1000	±20
	1001-3000	±50
	3001-5000	±100
	5001- >	±150

**TTAF
APPROVAL**

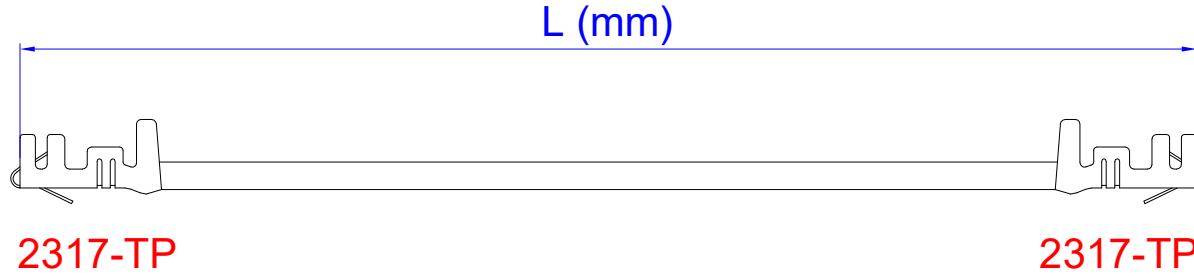

TTAF - 0 - YYYY - ZZ - T

MANUFACTURER CABLE COLOR CABLE LENGTH (mm) TERMINAL SERIES CONNECTOR TYPE

- 00-WHITE
- 01-BLACK
- 02-BLUE
- 03-GREEN
- 04-RED
- 05-PURPLE
- 06-BROWN
- 07-GRAY
- 08-PINK
- 09-ORANGE
- 10-YELLOW

- 2317 (2,5mm)
- 1800 (1,25mm)
- 5558 (mikrofit 3,0mm)
- 5557 (minifit 4,2mm)

- T:SOCKET TO WIRE LEADS
- C:SOCKET TO SOCKET

CODE :
SAMPLE : TTAF-00-0400-2317-C





DESCRIPTION :
DOUBLE SIDED 2317 DRAWN 400MM WHITE CABLE

2	2317-TP	Terminal	-	2	pcs.
1	KBL-15XX	UL1007 24 AWG KABLO	-	-	pcs.
No	Metarial Code	Description	Size (mm)	Q'ty	Unit
Date	20.09.2022	Rev.	Revision Detail	Rev.Dt.	Rev.by
Designed by	ZEYNEP ŞAHİN	-			
Checked by	ERSİN YÜKSEL				
			Part No		
			TTAF-0-YYYY-ZZ-T		
			Drawing Nr.	Scale	Sheet No
			-	NONE	1/1


VIEW	TOLERANCE	
	0-10	±1
	11-250	±5
UNIT: mm	251-500	±10
	501-1000	±20
	1001-3000	±50
	3001-5000	±100
	5001->	±150

▲ Order Code : 2317-TP


**TTAF
APPROVAL**

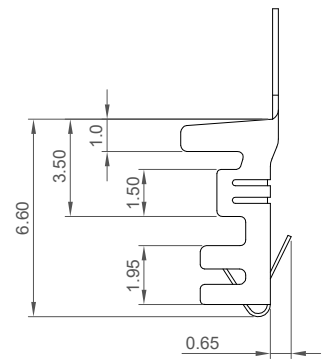

Sec:A-A



Sec:B-B



Wire Range	Insulation O.D.	Material	Finish	Qty/reel
AWG#22..#28	1.90 mm (max)	Phosphor Bronze&Brass	Tin-Plated	8.000 pcs

Date	03.11.2014	Rev.	-	Revision Detail		Rev.Dt.		Rev.by		Part No	2317-TP		
Designed by	Yeşim AKSOY												
Checked by	Fatih BOLACA												
										Drawing Nr.	Scale	Sheet No	
										-	NONE	1/1	

Form No: FR-01/004 İYT: 10/2003 Rev:06 09/01/2012