


VIEW	TOLERANCE	
	0-5	±0.1
	6-10	±0.25
UNIT: mm	11-50	±0.5
	51-100	±1
	101-250	±2
	251-500	±5
	501-1000	±10
	1000-2000	±20

TTAF
APPROVAL

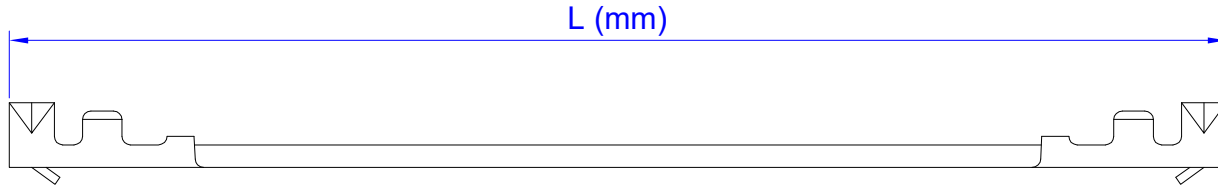

1800-TP

1800-TP

TTAF - 0 - YYYY - ZZ - T

MANUFACTURER

CABLE

CABLE LENGTH
(mm)

TERMINAL
SERIES

CONNECTOR
TYPE

00-WHITE
01-BLACK
02-BLUE
03-GREEN
04-RED
05-PURPLE
06-BROWN
07-GRAY
08-PINK
09-ORANGE
10-YELLOW

2317 (2,5mm)
1800 (1,25mm)
5558 (mikrofit 3,0mm)
5557 (minifit 4,2mm)

T:SOCKET TO WIRE LEADS
C:SOCKET TO SOCKET


2	1800-TP	Terminal	-	2	pcs.	
1	KBL-227XX	UI1061 28 AWG (Tel sayısı:7, tel çapı:0,127mm²)	-	1	pcs.	
No	Material Code	Description	Size (mm)	Q'ty	Unit	
Date	3.01.2023	Rev.	Revision Detail	Rev.Dt.	Rev.by	
Designed by	Zeynep ŞAHİN				Part No	
Checked by	Ersin YÜKSEL				TTAF-0-YYYY-ZZ-T	
				Drawing Nr.	Scale	Sheet No
				-	NONE	1/1

Ürün	Akım Değeri	Voltaj Değeri	Dayanma Gerilimi	Çalışma Sıcaklığı
TTAF-0-YYYY-1800-T	1A	125V	500VAC @ 60s	-40°C ~ +85°C

Form No: FR-01/004 İYT: 10/2003 Rev:06 09/01/2012




VIEW	TOLERANCE	
	0-10	±1
	11-250	±5
	251-500	±10
	501-1000	±20
	1001-3000	±50
	3001-5000	±100
	5001->	±150

UNIT: mm




▲ Order Code : 1800-TP


**TTAF
APPROVAL**

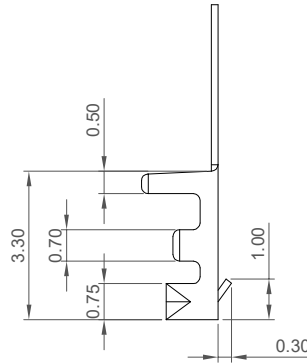

Sec:A-A



Sec:B-B



Wire Range	Insulation O.D.	Material	Finish	Qty/reel
AWG#28..#32	1.10 mm(max)	Phosphor Bronze	Tin-Plated	15.000 pcs

Date	03.11.2014	Rev.	Revision Detail	Rev.Dt.	Rev.by	Part No		
Designed by	Yeşim AKSOY	-				1800-TP		
Checked by	Fatih BOLACA							
						Drawing Nr.	Scale	Sheet No
						-	NONE	1/1

1

2

3

4

5

6

A4