
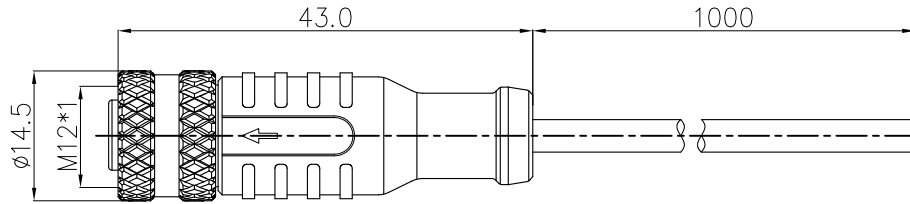


REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE



Detailed product Description:

1. Waterproof connector rating is IP67
2. Protected from dust and water during immersion, resistant to many oils and chemical etc
3. Wire cross section:
 A Code: 3~5Pin (22#)0.34mm², 8Pin (24#)0.25mm²
 D Code: 4Pin (22#)0.34mm²
 S Code: 4Pin (16#)1.5mm²
 T Code: 4Pin (16#)1.5mm²

Other Specification:

1. Contact PIN: Phosphor copper with gold plating
2. Coupling nut/screw: Brass with nickel plating
3. Insulation plastic: PA and TPU
4. Operating temperature: -25℃~+85℃

4.BK 3.BU 1.BN	4.BK 3.BU 2.WH 1.BN	5.GY 4.BK 3.BU 2.WH 1.BN	8.RD 7.BU 6.PK 5.GY 4.YE 3.GN 2.BN 1.WH	4.BU 3.WH 2.OR 1.YE	PE.BK 3.BU 2.WH 1.BN	4.BK 3.BU 2.WH 1.BN

Pin Out

Prat Number	Contacts	Rated Voltage		Rated Current	Contact Resistance	Insulation Resistance
		A/C	D/C			
PM-M12A-03P-FF-SL7X01-00AH		250V	250V	4A	10mΩ	>100MΩ
PM-M12A-04P-FF-SL7X01-00AH		250V	250V	4A	10mΩ	>100MΩ
PM-M12A-05P-FF-SL7X01-00AH		60V	60V	4A	10mΩ	>100MΩ
PM-M12A-08P-FF-SL7X01-00AH		30V	30V	2A	10mΩ	>100MΩ
PM-M12D-04P-FF-SL7X01-00AH		250V	250V	4A	10mΩ	>100MΩ
PM-M12S-04P-FF-SL7X01-00AH		630V	630V	12A	10mΩ	>100MΩ
PM-M12T-04P-FF-SL7X01-00AH		63V	63V	12A	10mΩ	>100MΩ

DETACHED LISTS	PART NO.: /	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD		
	APPD: WYL 9/10/15"	NAME: PM-M12X-XXP-FF-SL7X01-00AH		
	CHKD: BY 9/2/15"	TITLE: CUSTOMER DRAWING		
	DRFT: YJH 01/11/15"	REV	DO	
THIRD ANGLE PROJECTION		DRAWING NO.:	SHEET	1/1
		MM (INCH)	DO NOT SCALE DRAWING	SCALE 1:1