

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 05/16/17'	~	

NOTES:

1. ELECTRICAL CHARACTERISTICS:

- 1.1 CONTACT RESISTANCE: 20mΩ Max. INITIAL.
- 1.2 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
- 1.3 INSULATION RESISTANCE: 1000MΩ Min.

2. ENVIRONMENT CHARACTERISTICS:

- 2.1.TEMPERATURE RANGE: -40°C~+105°C.

3. MATERIALS:

- 3.1 INSULATOR:PBT+GLASS FIBER
- 3.2 SHELL:STEEL
- 3.3 CONTACT:COPPER ALLOY

4. PRODUCT NUMBER CODE:

DS1034-27- X X X X X X

Screw material
C: Copper Alloy
F: Steel







Contact plating
8: Full gold flash

Shell plating
N: Nickel

Housing color
B: Black
W: White

Connector type
M: Male
F: Female

No.of contacts
09,15,25,37

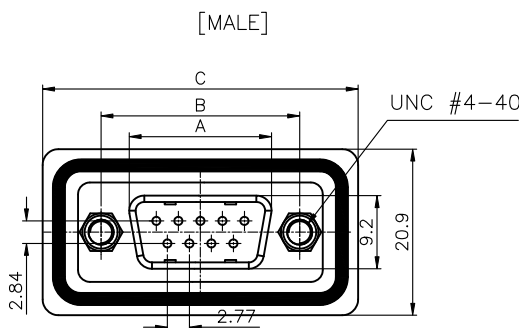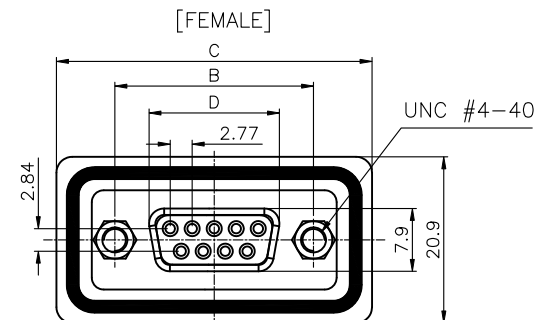

Dimension

Position	A±0.2	B±0.2	C±0.3	D
9	17.90	24.99	39.60	16.33
15	26.50	33.32	48.00	24.66
25	40.00	47.04	61.80	38.38
37	56.50	63.50	78.30	54.84

GENERAL TOLERANCE	ANGLE TOLERANCE
X. ±0.60	X. ±5°
.X ±0.38	.X ±3°
.XX ±0.25	.XX ±2°

DRAWING TYPE	CUSTOMER
SCALE	1:1 SHEET 1 OF 1
DRAWING NO.	C-DS1034-27-XXXXXX-A

PROJECTION	TITLE
UNITS mm	Water Proof D-SUB Machine Pin Solder Type
SHEET SIZE A4	SERIES DS1034-27 SERIES



晨翔电子有限公司
CONNFLY® CONNFLY ELECTRONIC CO., LTD