




▼ 外形尺寸

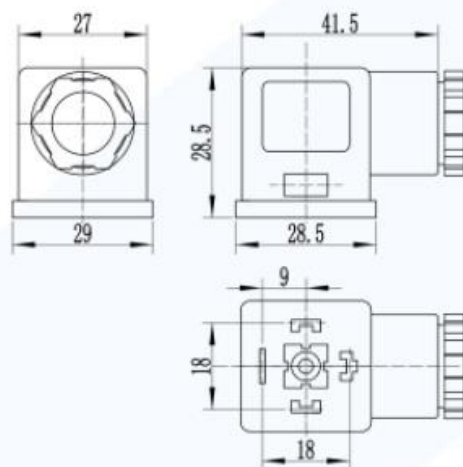

▼ 技术参数

| | |
|-------------------------------------|--|
| 插脚间距 Pin spacing | 18mm |
| 最大工作电压 Maximum operating voltage | AC250V DC300V(TEC664) |
| 插脚形式 Conventional power | 2+GND 3+GND |
| 额定电流 Pin form | 10A |
| 接触电阻 contact resistance | ≤ 4mΩ |
| 最大引出线 Maximum lead-out line | 3X1.5mm ² -4x1.5mm ² |
| 防护等级 Protection level | IP65 IP67(IE60529) |
| 安装螺丝 Mounting screws | M3×30 |