

SP-M12X-XXP-FF-SF800X-00A(H)

Coding: A,B,D

Pin number: 03,04,05,  
06,08,10,12

Thread specification:  
001: PG9  
002: M16\*1.5

REVISION RECORD


REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

10pin A Coding	12pin A Coding	5pin B Coding	4pin D Coding
Pin Assignments Front View	Pin Assignments Front View	Pin Assignments Front View	Pin Assignments Front View


10- $\phi 0.80$	12- $\phi 0.80$		
PCB Layout	PCB Layout	PCB Layout	PCB Layout

3pin A Coding	4pin A Coding	5pin A Coding	6pin A Coding	8pin A Coding
Pin Assignments Front View	Pin Assignments Front View	Pin Assignments Front View	Pin Assignments Front View	Pin Assignments Front View



PCB Layout	PCB Layout	PCB Layout	PCB Layout	PCB Layout



Thread specification:  
PG9




Panel Mounted

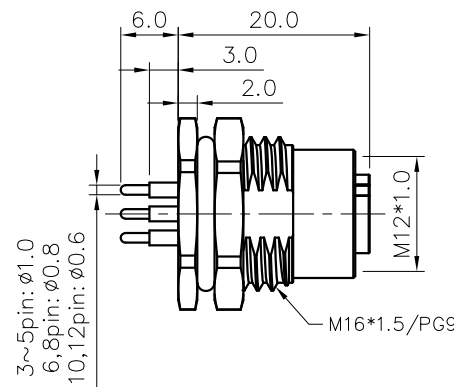

NOTES:

- Rated voltage/current : 3pin A: 250V / 4A  
4pin A: 250V / 4A  
5pin A: 60V / 4A  
6pin A: 30V / 2A  
8pin A: 30V / 2A  
10pin A: 30V / 1.5A  
12pin A: 30V / 1.5A  
5pin B: 60V / 4A  
4pin D: 250V / 4A
- Withstanding voltage : AC1060V/1Min
- Levels of protection: IP68
- Wire connection mode: soldering(PCB)
- Operating temperature:  $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$
- For Panel Thickness Max: 4.5mm
- RoHS Compliance

Thread specification:  
M16\*1.5



Panel Mounted

DETACHED LISTS	PART NO.: SPM12XXXPF800X00AH	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD		
	APPD:	NAME: SP-M12X-XXP-FF-SF800X-00A(H)		
	CHKD:	TITLE: CUSTOMER DRAWING		
	DRFT: LZ 2018.10.10	REV: D0-1	SHEET: 1/1	
THIRD ANGLE PROJECTION		DRAWING NO.: XXXXXXXX-XX-CXX	SCALE: 1:1	DO NOT SCALE DRAWING