

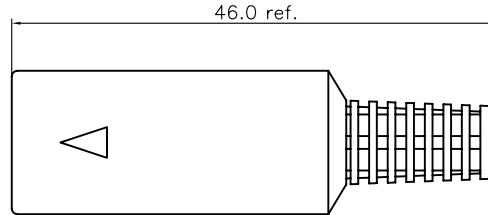
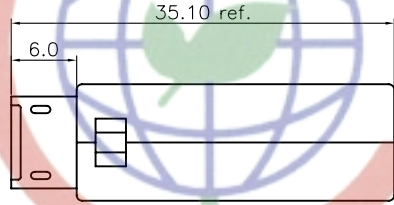


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 07/17/12'		



NOTES:


1. SPECIFICATIONS:

- 1.1 CONTACT CURRENT RATING: 1A MAX. PER PIN.
- 1.2 CONTACT RESISTANCE: 30 mΩ MAX.
- 1.3 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE.
- 1.4 INSULATION RESISTANCE: 1000 MΩ MIN.
- 1.5 OPERATING TEMPERATURE: -40°C~+105°C.

2. PRODUCT NUMBER CODE:

DS1063 - X X X X X

- Contact plating
0: Selective Gold Flash
- No. of contacts:
3 4 5 6 7 8
- Shell Plating:
N: Nickel
- Color of housing
B: Black
- Connector Type
M: Male
- Series No.
DS1063

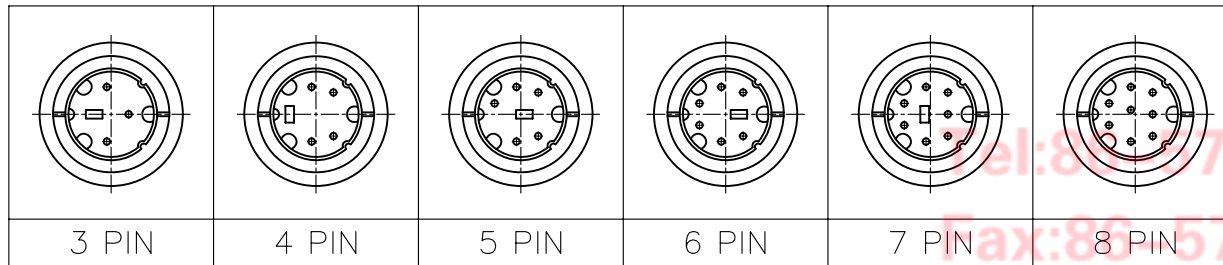

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION	TITLE
X. ±0.60	X. ±5°	UNITS	MALE MINI DIN WITH SR TYPE
.X ±0.38	.X ±3°	SHEET SIZE	SERIES DS1063 SERIES
.XX ±0.25	.XX ±2°		
DRAWING TYPE	CUSTOMER	晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD	
SCALE	1:1 SHEET 1 OF 1		
DRAWING NO.	C-DS1063-XXXXX		

Tel: 86-574-63508787

Fax: 86-574-63510817

E-mail: sale@zhenqin.com.cn

http://www.zhenqin.com

Address: East Industry Zone KuangYan

P.C: 315333