



Stereo Jack Series



KLS1-TSJ3.5-008CA (Dip Stereo Jack)

Technical parameters:

Rated voltage: DC 30 V
 Rated current: 0.5 A
 Contact resistance: 0.03Ω, max
 Insulation resistance: 100MΩ, min
 Pressure: AC500V (50Hz) / 1minute
 Insertion Force :2-20 N
 Life: 50000 times
 Operating Temperature:-30°C ~ 70°C

Material:

Housing , Cover : PBT
 Center Pin Material:
 Spring : Stainless Steel
 Terminal 1,2,3,10,11 : Brass
 Bushing : Brass

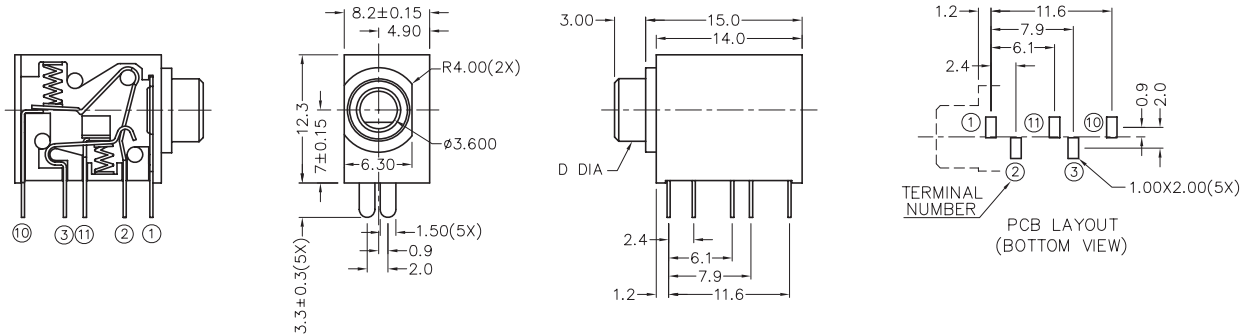

With NUT	M6X0.5	MODEL NO.	TSJ3.5-008CA	TSJ3.5-008CAA	TSJ3.5-008CAB	TSJ3.5-008CAC	TSJ3.5-008CAD
D DIA		SCHEMATIC					

ORDER INFORMATION

Product NO.: KLS1-TSJ3.5-008CAA

