


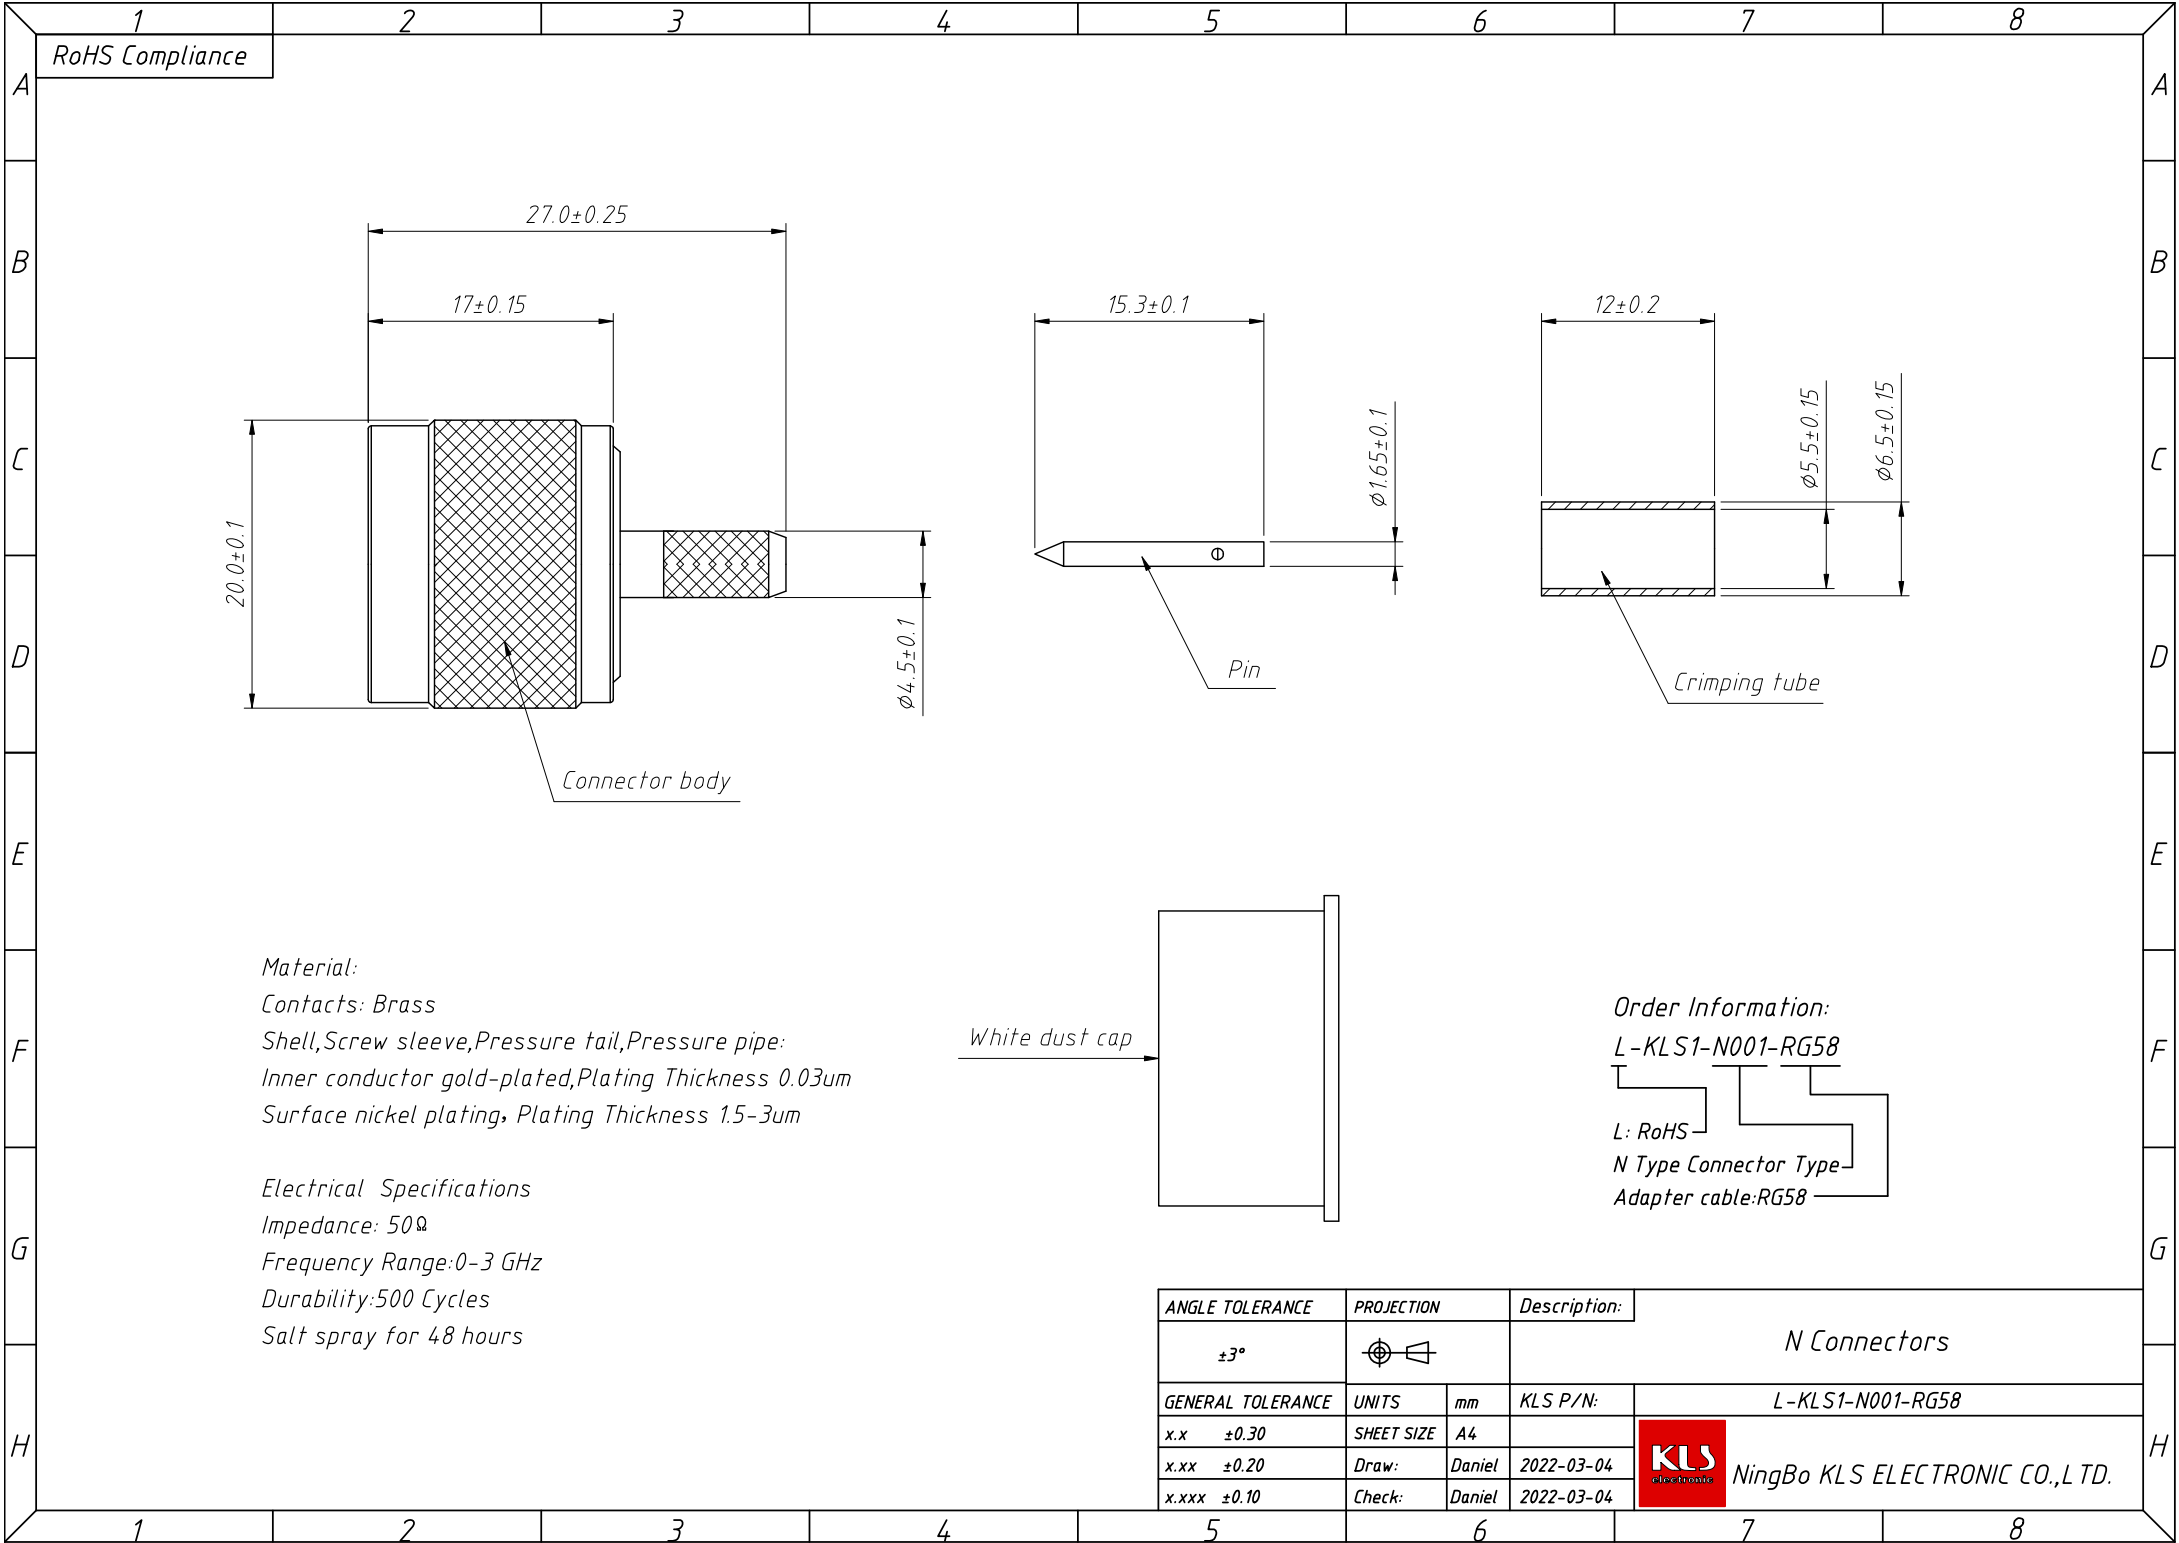

Material:

Contacts: Brass

Shell, Screw sleeve, Pressure tail, Pressure pipe:

Inner conductor gold-plated, Plating Thickness 0.03um

Surface nickel plating, Plating Thickness 1.5-3um

Electrical Specifications

Impedance: 50Ω

Frequency Range: 0-3 GHz

Durability: 500 Cycles

Salt spray for 48 hours

Order Information:

L-KLS1-N001-RG58

L: RoHS

N Type Connector Type

Adapter cable: RG58

ANGLE TOLERANCE		PROJECTION		Description:	
±3°				N Connectors	
GENERAL TOLERANCE		UNITS	mm	KLS P/N:	L-KLS1-N001-RG58
x.x	±0.30	SHEET SIZE	A4		
x.xx	±0.20	Draw:	Daniel	2022-03-04	NingBo KLS ELECTRONIC CO.,LTD.
x.xxx	±0.10	Check:	Daniel	2022-03-04	