


REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

Technical characteristics:

Specifications
 DIN EN 60 664-1,
 DIN EN 61 984
Approvals: ☞


Inserts

01. Number of contacts : 4+PE
02. Rated Current : 10A
03. Rated Voltage conductor-ground : 230V
04. Rated Voltage conductor-conductor : 400V
05. Pollution degree : 3
06. Rated impulse voltage : 4kV
07. or: 10A/250V/4KV/3
08. Insulation resistance : $\geq 10 \Omega$
09. Material: Polycarbonate
10. Colour: RAL 7032 (Light grey)
11. Rated voltage acc. to UL/CSA: 600V
12. Limiting temperatures : -40°C ~ +125°C
13. Flammability acc. to UL94: V0
14. Mechanical working life (mating cycles) : ≥ 500

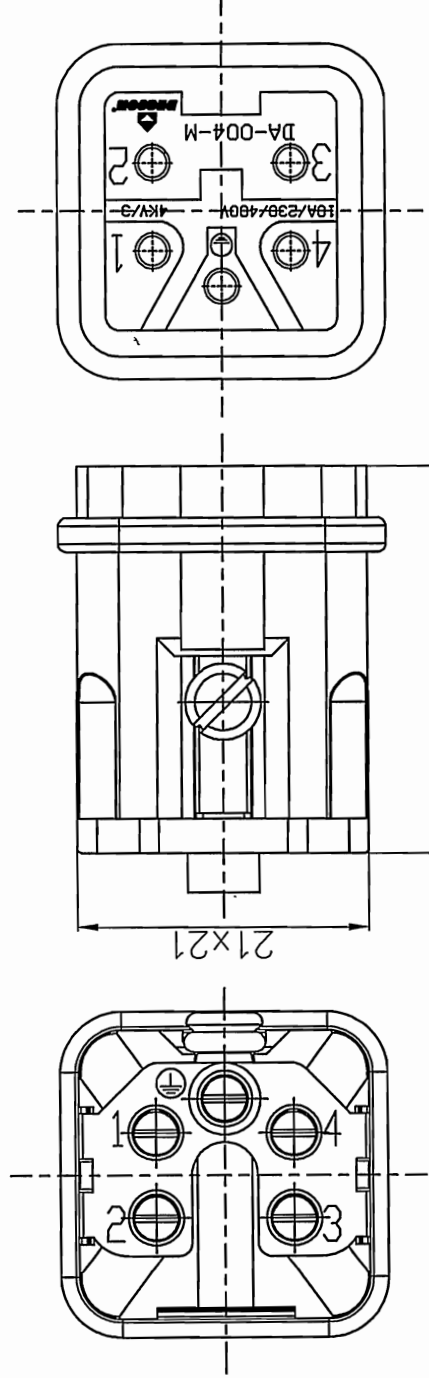

Contacts

01. Material: Copper alloy
02. Surface: hard-silver plated
03. Contact resistance : $\leq 2m \Omega$
04. Terminal : Screw terminal
05. Wire gauge : 1.0-2.5mm² (AWG 18-14)
06. Tightening torque : 0.25Nm
07. Stripping length : 4.5mm
08. Rohs Compliance

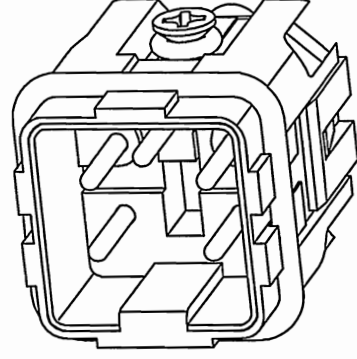

PART NO:	DA004M	NINGBO DEGSON ELECTICAL CO., LTD
APPD:	M/S 2016.7.20	NAME:
CHKD:	Ljm 2016.7.16	DA-004-M
DRFT:	Mr. Yang 2016.06.16	TITLE: CUSTOMER DRAWING
THIRD ANGLE PROJECTION		REV DO-1
DO NOT SCALE		SHEET 1/1
DRAWING NO: DA-004-M-E01		SCALE 2:1