

REVISION RECORD			
REV	ECN	DESCRIPTION	DATE

Technical characteristics:

Specifications

DIN EN 60 664

DIN EN 61 984





Inserts

01. Number of contacts : 6
02. Rated Current : 16A
03. Rated Voltage : 830V
04. Pollution degree : 3
05. Rated impulse voltage : 8kV₁₀
06. Insulation resistance : $\geq 10\Omega$
07. Material: Polycarbonate
08. Limiting temperatures : -40°C~+125°C
09. Flammability acc.to UL94:V0
10. Mechanical working life (mating cycles) : ≥ 500

Contacts

01. Material: Copper alloy
02. Surface: hard-silver plated
: hard-Gold plated
03. Contact resistance : $\leq 1m\Omega$
04. Terminal : Crimp terminal
05. Wire gauge : 0.14-4mm² (AWG 26-12)
06. Rohs Compliance

Note: Crimp contact pins should
order separately

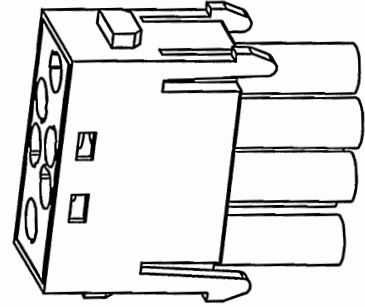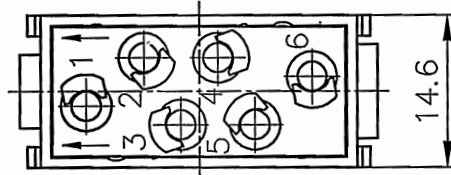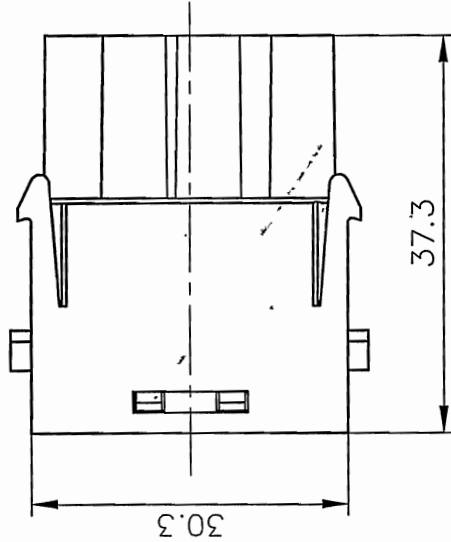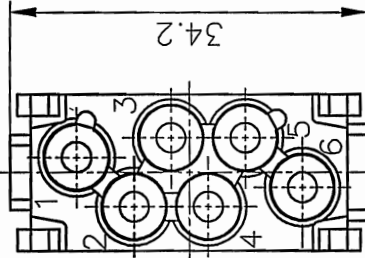

PART NO.: /		NINGBO DEGSON ELECTRICAL CO., LTD	
APPD: HYS 2016.8.25		NAME: DVME-006-FC	
CHKD: Ljm 2016.9.25		TITLE: CUSTOMER DRAWING	
DRFT: Mr.yang 2016.08.22		REV: DO-1	
THIRD ANGLE PROJECTION		SHEET 1/1	
DO NOT SCALE		SCALE 1.5:1	