

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

Technical characteristics:

Specifications
 DIN EN 60 664-1
 DIN EN 61 984




Inserts

- 01. Number of contacts : 4
- 02. Rated Current : 40A
- 03. Rated Voltage : 830V
- 04. Pollution degree : 3
- 05. Rated impulse voltage : $8kv_{10}$
- 06. Insulation resistance : $\geq 10\Omega$
- 07. Material: Polycarbonate
- 08. Rated voltage acc. to UL: 600V
- 09. Limiting temperatures : $-40^{\circ}C \sim +125^{\circ}C$
- 10. Flammability acc. to UL94: V0
- 11. Mechanical working life (mating cycles) : ≥ 500

Contacts

- 01. Material: Copper alloy
- 02. Surface: hard-silver plated
- 03. Contact resistance : $\leq 0.3m\Omega$
- 04. Terminal : Crimp terminal
- 05. Wire gauge : 1.5-6mm² (AWG 16-10)
- 06. Rohs Compliance

Note: Crimp contact pins should order separately

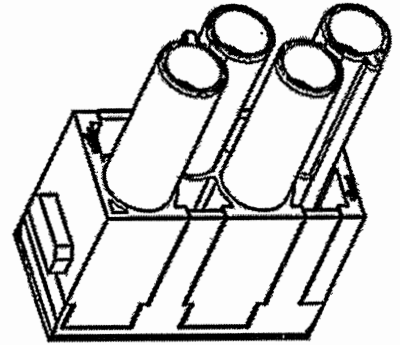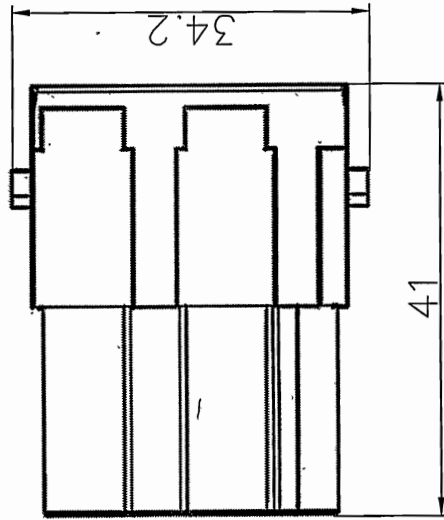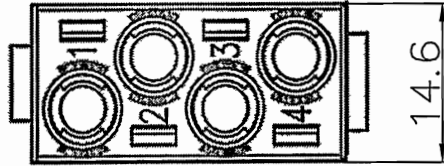

PART NO: /		NINGBO DEGSON ELECTRICAL CO., LTD 宁波高松电子有限公司	
APPD: HBS 2016.9.26	NAME:		
CHKD: JYM 2016.9.25	TITLE: CUSTOMER DRAWING		
DRFT: yong 2016.08.22	DRAWING NO: DMK-004-FC		
THIRD ANGLE PROJECTION	REV	DO-1	1/1
	DO NOT SCALE DRAWING		SCALE 1.5:1

DETACHED LISTS