

2		1		H	
REVISION RECORD					
REV	ECN	DESCRIPTION	DRFT	DATE	

Technical characteristics:





Specifications
DIN EN 60 664
DIN EN 61 984

Inserts

01. Number of contacts :2
02. Rated Current :70A
03. Rated Voltage :1000V
04. Pollution degree :3
05. Rated impulse voltage :8kv¹⁰
06. Insulation resistance : $\geq 10 \Omega$
07. Material:Polycarbonate
08. Rated voltage acc. to UL:600V
09. Limiting temperatures : $-40^{\circ}\text{C}\sim+125^{\circ}\text{C}$
10. Flammability acc. to UL94:V0
11. Mechanical working life (mating cycles) : ≥ 500

Contacts

01. Material:Copper alloy
02. Surface:hard-silver plated
03. Contact resistance :0.5m Ω
04. Terminal :Axial screw terminal
05. Wire gauge :14-22mm²
06. Hexagonal driver:SW2.5
07. Stripping length :11mm
08. Tightening torque :2-4Nm
09. Rohs Compliance

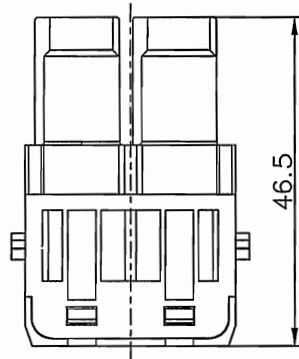

PART NO.: /		NINGBO DEGSON ELECTRICAL CO., LTD	
APPD: HJS 2016.8.26	NAME: DMK7-002-F(14-22mm ²)		
CHKD: Jym 2016.9.25	TITLE: CUSTOMER DRAWING	REV	D0-1
DRFT: yong 2016.08.22	DRAWING NO.: 1/1	SHEET	1/1
THIRD ANGLE PROJECTION		DO NOT SCALE	DRAWING SCALE