




REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 03/25/09'	~	LJC 03/25/09'
B	ADD PACKING TYPE	JLZ 04/02/15'	~	

NOTES:

- MATERIAL
 - INSULATOR:THERMOPLASTIC(UL 94V-0).
 - CONTACT: COPPER ALLOY.
- SPECIFICATION
 - TEMPERATURE: $-40^{\circ}\text{C}\sim+105^{\circ}\text{C}$.
 - CONTACT RESISTANCE: $30\text{m}\Omega$ max.
 - INSULATION RESISTANCE: $100\text{M}\Omega$ min.
 - DIELECTRIC WITHSTANDING VOLTAGE: AC 100V PER MINUTE.
- PART NUMBER: DS1020-12
- PRODUCT NUMBER CODE:

DS1020-12- X X X X X - X

- PACKING TYPE ②
- R:TAPE ON REEL
- B:TUBE
- CONTACT TYPE
- A: LOWER CONTACT
- CONTACT PLATING
- T1: TIN
- 8: FULL GOLD FLASH
- COVER COLOR
- B:BLACK
- HOUSING COLOR
- V:IVORY
- No. OF CONTACTS
- 10~50

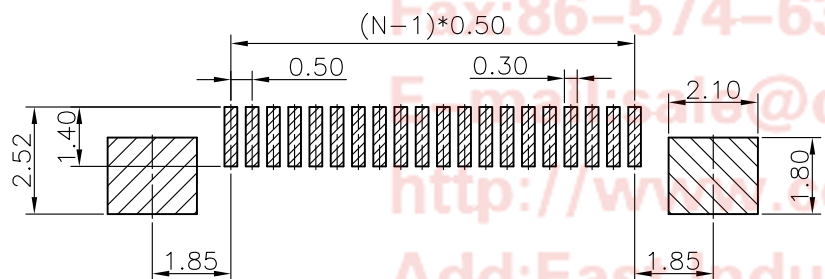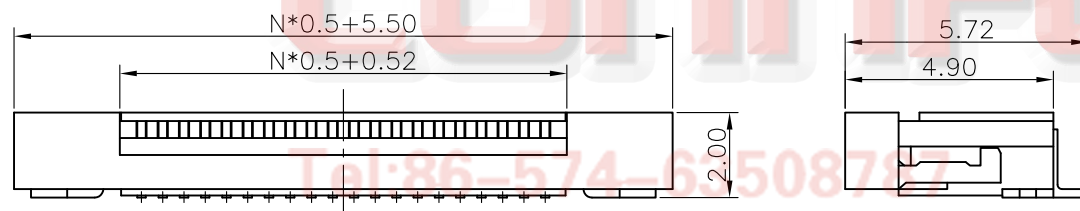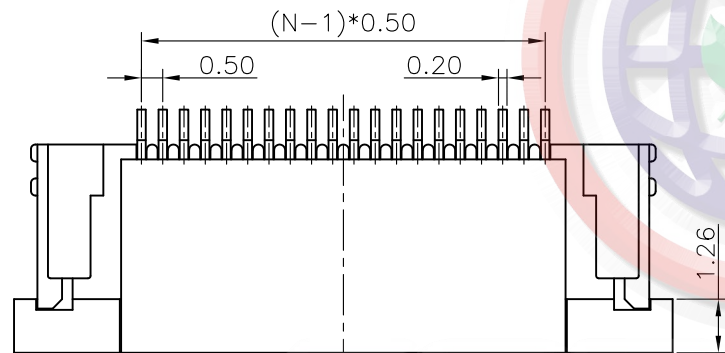

RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°
DRAWING TYPE		CUSTOMER	
SCALE		1:1	SHEET 1 OF 1
DRAWING NO.		C-DS1020-12-XXXX-X-B	

PROJECTION	TITLE
	0.5mm FPC UPPER CONTACT
UNITS	ZIF R/A SMT TYPE
SHEET SIZE	SERIES DS1020-12 SERIES



晨翔电子有限公司

CONNFLY CONNFLY ELECTRONIC CO. LTD