



RoHS  Lead-free

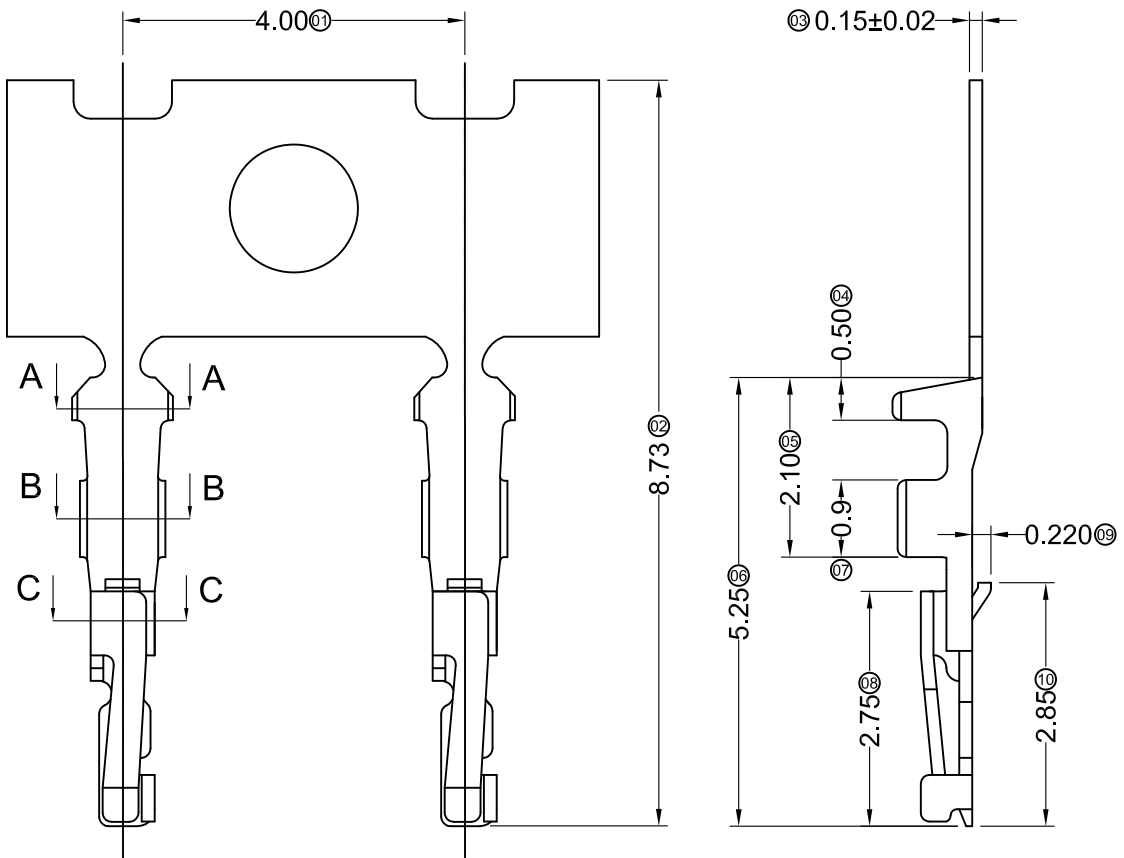


Specifications :


- Voltage rating: 100V AC / DC
- Current rating: 1A AC / DC
- Withstanding voltage: 500V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: ≥500MΩ
- Contact resistance: ≤30mΩ
- After environmental testing: ≤40mΩ



SECTION A-A
SCALE 1 : 1



SECTION B-B
SCALE 1 : 1



SECTION C-C
SCALE 1 : 1

	Phosphor Bronze	AWG#28-32	0.60mm(Max)	Stamping Before Pating: 30u" Ni/Whole Gold :Gold Flash	
PART NO	Material	Wire Range	Insulation O.D.	Finish	Used In SWB Housing

DATE	OLD REV	NEW REV	ECN	DESCRIPTION	CHECK	APPROVAL	PROJECT		

GENERAL TOLERANCE	
.X	±0.30
.XX	±0.20
.XXX	±0.10

KLS ELECTRONIC CO., LTD			
APPROVAL	CHECK	DRAWN	DATA
Kim Huang	Jova Lau	sylvia	2016/03/17

PART NO. L-KLS1-XL3-1.00-T			
TITLE 1.00 mm Crimp Style Connectors			
UNIT	SCALE	NUMBER	REV
MM	1 : 1	A-106	A