

A



B

C

D

E


F

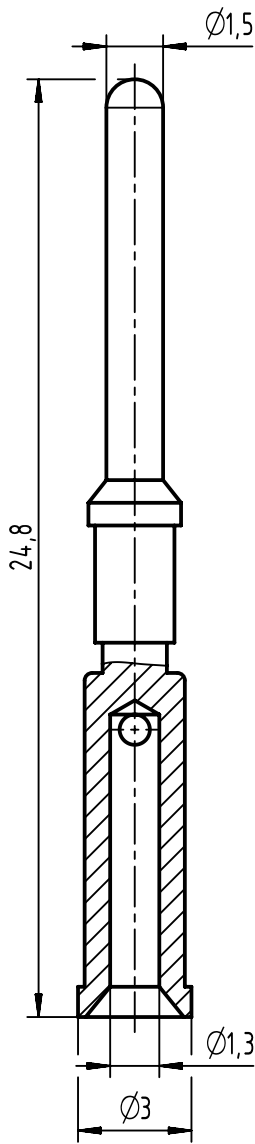

this crimp contact should be processed with:

locator 09990000638
hand crimping tool 09990000509

| surface | | | |
|---------|----------------------|-----------------------|----------------------|
| pl | Ni (μm) | NiP (μm) | Au (μm) |
| 1 | min. 1,5 | min. 1,5 | min. 0,15 |

| | | | | | | | | |
|---|--|---|-----------------------|------------------------|-----------------------------|--|------------------------|--|
|  | All Dimensions in mm Original Size DIN A4 | | Scale 5:1 | Free size tol. | | Ref. | Sub. | |
| | All rights reserved Department EL PD | | Created by BALSAN | Inspected by 402602 | Standardisation SCHREIER | Date 2020-08-05 | State Final Release | |
| HARTING Electronics GmbH D-32339 Espelkamp | | Title M12 Power Male crimp contact PE for Plug 0.75 sqmm | | | | Doc-Key / ECM-Nr. 100610450/UGD/001/D 500000175653 | | |
| | | Type TB | Number 21011009928 | | | Rev. D | Page 1/1 | |