

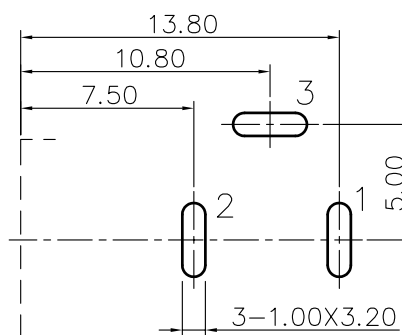
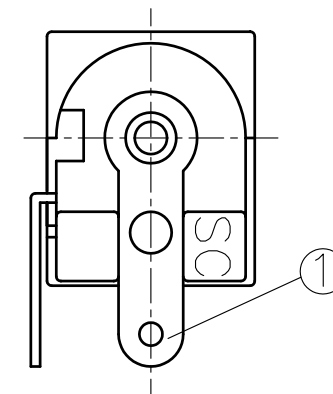
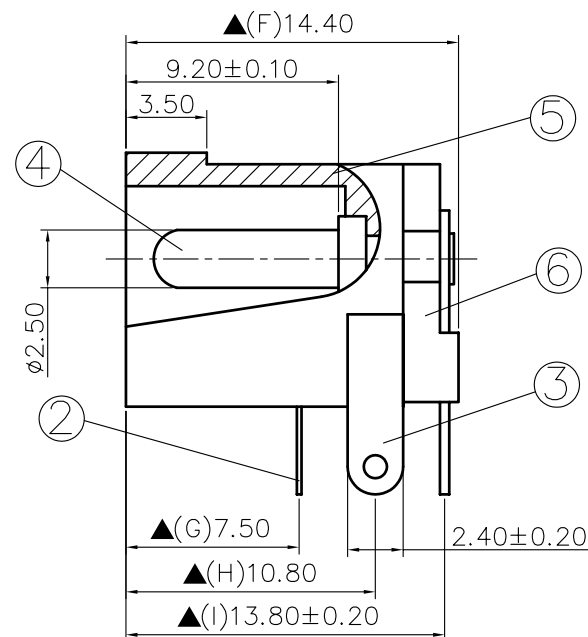


SCHEMATIC	
MODEL NO	C

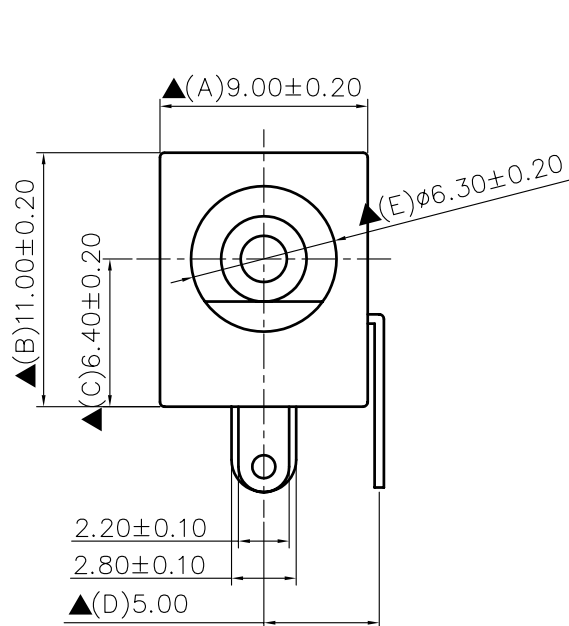

Pin Hole Layout
(Jack Bottom View)

6.	Cover	PBT+30% Fibre Glass	1	Black Color
5.	Housing	PBT+30% Fibre Glass	1	Black Color
4.	Pin(2.5φ)	Copper	1	Nickel Plated
3.	Break Terminal	0.4T Brass	1	Silver Plated
2.	Sleeve Spring	0.2T Phosphor Bronze	1	Silver Plated
	Pin Terminal	0.4T Brass	1	Silver Plated
	Description	Material	Q'TY	Finish

NINGBO KLS ELECTRONIC CO.,LTD

DATE	DWN	CHKD	APVD	MANAGER
11.02.2012				

PART NAME :DC POWER JACK PART NUMBER: L-KLS1-DC-005A-2.5-5A

VERSION:7.0

TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT:mm



SCALE:1/1

SPECIFICATIONS:

Contact Resistance : 30mΩ max
Current Rating : Max 5.0A , 24V DC
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstand Voltage : AC 500V for one minute
Remark: ▲: The Most Important Dimension

RoHS
Compliant

For Reference
僅供參考