



P.C.B  
LAYOUT  
VIEW

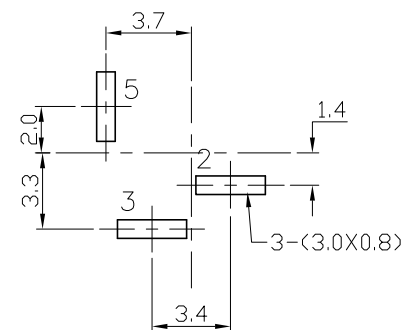

SCHEMATIC



PIN	ø2.0	ø2.5	
APPD.			

- SPECIFICATION**
1. Rating : DC 30V 0.5A;
  2. Contact resistance:  $\leq 0.03\Omega$ ;
  3. Insulation resistance:  $\geq 100M\Omega$  (DC250V);
  4. Withstand voltage: 500VAC ;
  5. Insertion and extraction force: 3-20N;
  6. Life test: 5,000 cycles.

6	COVER	1	PF	
5	CONTACT	1	BRASS	Cu-Sn-Plating
4	POINT	1	H59 BRASS	Ni-Plating
3	SPRING	1	65Mn STEEL	Cu-Sn-Plating
2	FLAT PIECE	1	H62 BRASS	Cu-Sn-Plating
1	HOUSING	1	PBT	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

UNIT: MM	TYPE:	MODEL NO:	PAPER NO:	PAGE 1 OF 1	
	DC JACK	L-KLS1-DC-022BA-2.0	A4	TOLERANCE	ANGLES SCALE VER
			±0.15	±1.5'	3:1 1
DESIGNER		NINGBO KLS ELECTRONIC CO; LTD			
CHECK					
APPROVED					