

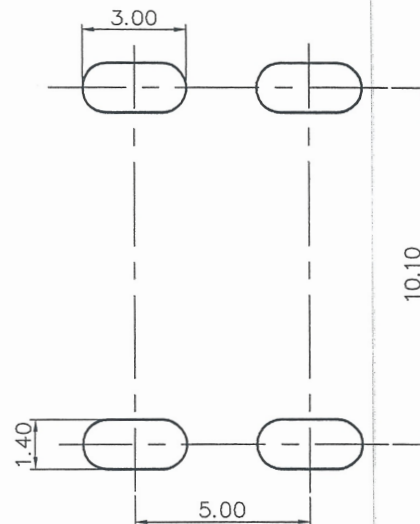
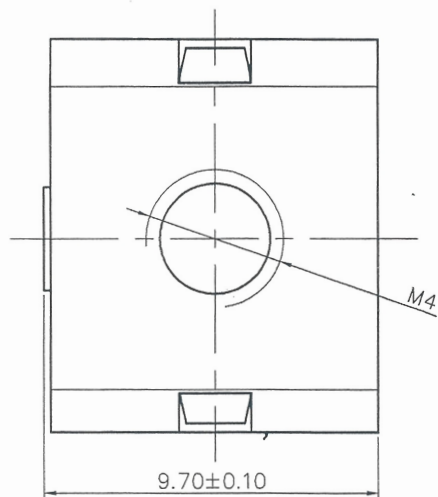


REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE

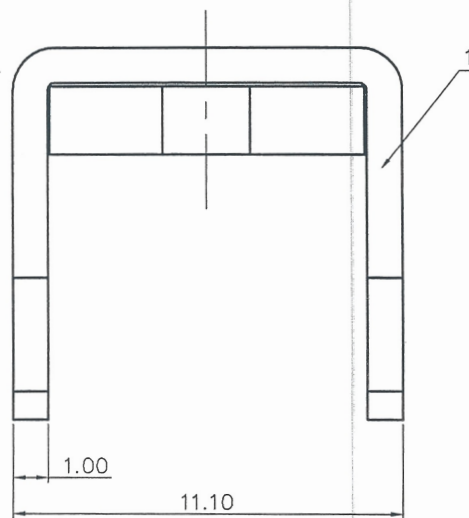

PCB LAYOUT

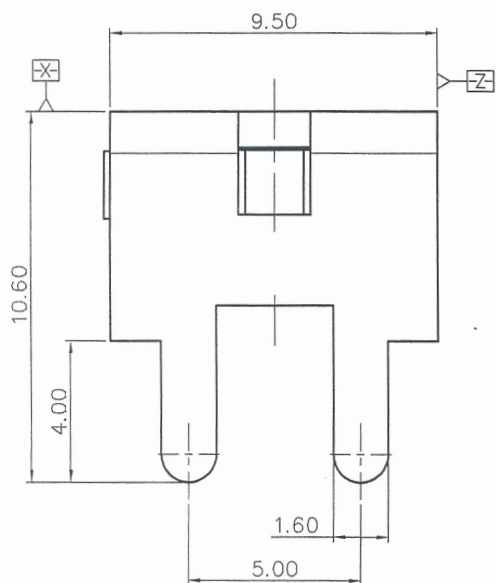


NOTES2:

- Current : 60A
- Torque value : M4 , 1.8N·m (16.0Lb.in,18.36kgf·cm)
- Dimension shall be interpreted per ASME Y14.5-2009
- Undimensioned tolerances:

Pitch range in mm	Nominal dimension range in mm							- / □
	Over 6 TO 6	Over 10 TO 10	Over 24 TO 24	Over 30 TO 30	Over 60 TO 60	Over 100 TO 100	Over 150 TO 150	
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	0.1/10
								±2'

5.RoHS Compliance

K40 - 00A (H)  
 (Series No.) (RoHS)  
 00A-(Standard)



ITEM	NAME OF PART	MATERIAL	NOTES
1	Pin header	Sn Plated	

DETACHED LISTS	PART NO.: /	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD		
	APPD: <i>Robin 2018.11.12</i>	NAME: K40-00A(H)		
	CHKD: <i>Robin 2018.11.12</i>	TITLE: CUSTOMER DRAWING		
	DRFT: Xin 2018.11.12	REV	TO	
		DRAWING NO.: K40-C01	SHEET	1/1
		DO NOT SCALE DRAWING	SCALE 1:1	