


**Product Information**

Material: NYLON 66(UL94V-2),NATURAL  
 Working temperature: 0°C~80°C  
 Dipping Bibulous: 2.5% at 20°C 24H 50% Humidity  
 Withstand Voltage:2500V/0.5mA/1m  
 Heat Resistance: B-130°C (30m without melting at 200 °C )  
 Application: the fixed PC board on the boards, free tools,

MOUNTING HOLE  $\phi 3.5$   
 P.C.B THICKNESS 1.6

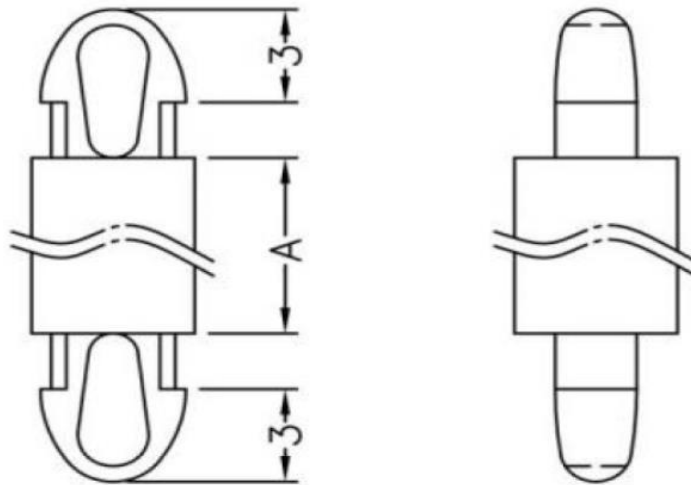

MOUNTING HOLE  $\phi 3.5$   
 P.C.B THICKNESS 1.6

P/N	A	UPPER		CHASSIS		Color
		PCB Hole	PCB THICKNESS	PCB Hole	PCB THICKNESS	
	mm	mm	mm	mm	mm	
L-KLS8-0237G-LF-02	2.0	3.5	1.6	3.5	1.6	Natural
L-KLS8-0237G-LF-03	3.0	3.5	1.6	3.5	1.6	Natural
L-KLS8-0237G-LF-04	4.0	3.5	1.6	3.5	1.6	Natural
L-KLS8-0237G-LF-05	5.0	3.5	1.6	3.5	1.6	Natural
L-KLS8-0237G-LF-06	6.0	3.5	1.6	3.5	1.6	Natural
L-KLS8-0237G-LF-07	7.0	3.5	1.6	3.5	1.6	Natural
L-KLS8-0237G-LF-08	8.0	3.5	1.6	3.5	1.6	Natural
L-KLS8-0237G-LF-10	10.0	3.5	1.6	3.5	1.6	Natural
L-KLS8-0237G-LF-12	12.0	3.5	1.6	3.5	1.6	Natural
L-KLS8-0237G-LF-14	14.0	3.5	1.6	3.5	1.6	Natural
L-KLS8-0237G-LF-16	16.0	3.5	1.6	3.5	1.6	Natural
L-KLS8-0237G-LF-18	18.0	3.5	1.6	3.5	1.6	Natural
L-KLS8-0237G-LF-20	20.0	3.5	1.6	3.5	1.6	Natural
L-KLS8-0237G-LF-22	22.0	3.5	1.6	3.5	1.6	Natural