





REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	FROS	2021/03/23

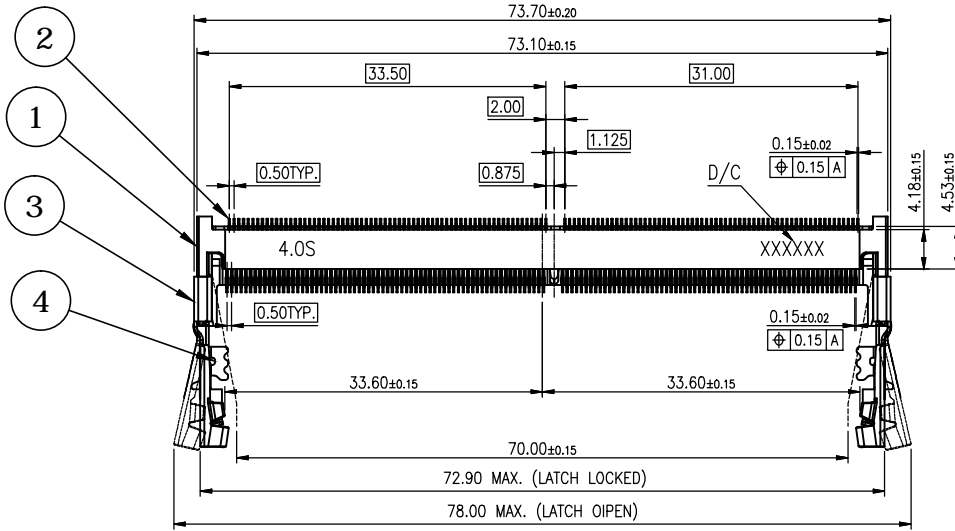

DATE CODE: YYWWD  
 YY: YEAR  
 WW: WEEK (01~52)  
 D: DAY (1~7)

**SPECIFICATION:**

1. ELECTRICAL
  - 1.1 Current Rating: 0.6A per pin
  - 1.2 Voltage Rating: 25V AC
  - 1.3 Contact Resistance: 60mΩ max.
  - 1.4 Insulation Resistance: 100MΩ
  - 1.5 Dielectric Withstanding Voltage: 500VAC
2. MECHANICAL
  - 2.1 Durability: 50 Cycle
  - 2.2 Insertion Force: 59.8N max.
  - 2.3 Extraction Force: 44.6N max.
3. ENVIRONMENTAL
  - 3.1 Operating temperature range: -40°C~+85°C
  - 3.2 Storage temperature range: -40°C~+85°C
4. SOLDER ABILITY
  - 4.1 Recommended IR-Reflow Temperature: 260°C

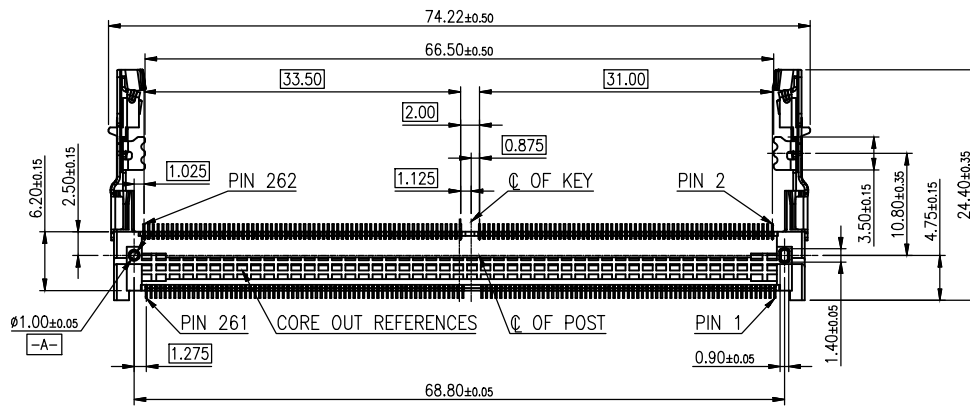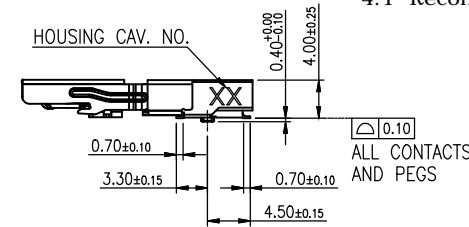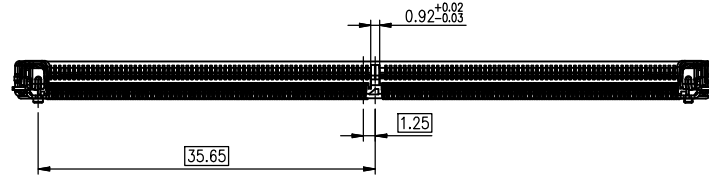




4	PEG	Stainless steel, 50u"~150u" matte tin plating over 50u"~150u" nickel plating
3	LATCH	Stainless steel
		Copper alloy, 1u" gold plating on contact and solder area, under plating nickel
2	CONTACT	
1	HOUSING	Thermoplastic, UL94V-0, Black

NO. PART NAME		DESCRIPTION	
UNLESS OTHERWISE SPECIFIED TOLERANCE			
UNIT:	DECIMAL	LINEAR	ANGLES
mm	X.	±0.50	±5°
	X.X	±0.25	±3°
	X.XX	±0.12	±1°
www.attend.com.tw			
DRAWN	Fros	2021/03/23	DRAWN NAME:
CHECKED	Tim	2021/03/23	DDR5 SODIMM Socket, Horizontal 4.0H, STD, G/F, Black, Reel, Solder PEG
APPROVED	Ken	2021/03/23	PRODUCT NO. 126A-40A00
SCALE 1.25		SHEET 1/2	SIZE A4
FILE NAME		126A-40A00_B_1	








REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	FROS	2021/03/23

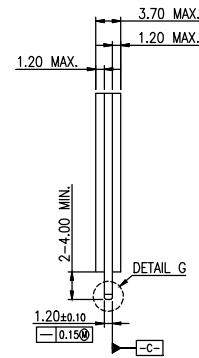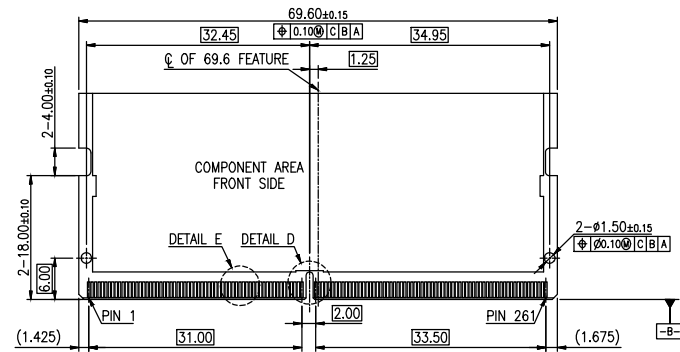


DETAIL E  
SCALE 2:1



DETAIL D  
SCALE 2:1

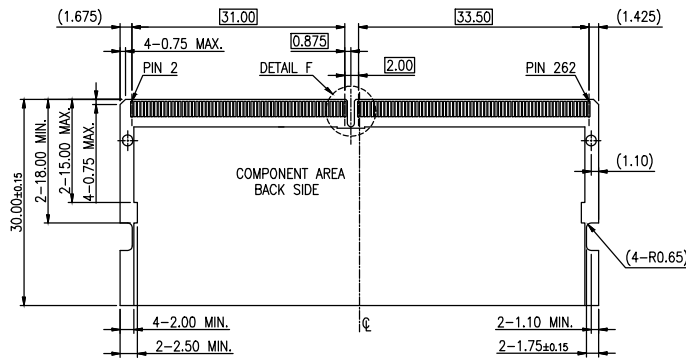


DETAIL G  
SCALE 2:1






DETAIL F  
SCALE 2:1

RECOMMEND MODULE CONFIGURATION


UNLESS OTHERWISE SPECIFIED TOLERANCE				 www.attend.com.tw	
UNIT:	DECIMAL	LINEAR	ANGLES		
mm	X.	±0.50	±5°		
	X.X	±0.25	±3°		
	X.XX	±0.12	±1°		
DRAWN	Fros	2021/03/23	DRAWN NAME:		
CHECKED	Tim	2021/03/23	262 PIN DDR5 SODIMM, 0.5MM PITCH PACKAGE		
APPROVED	Ken	2021/03/23	PRODUCT NO.		
SCALE	1.25	SHEET	1/1	SIZE	A4
FILE NAME		126A-CARD_B_1			

REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	FROS	2021/03/23

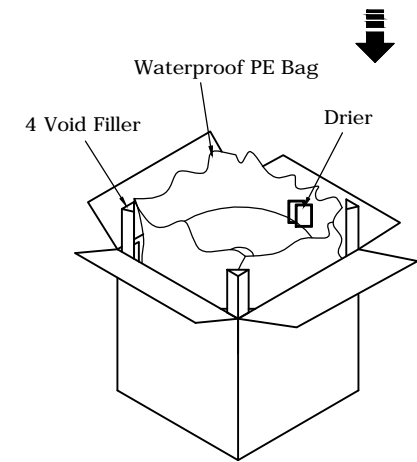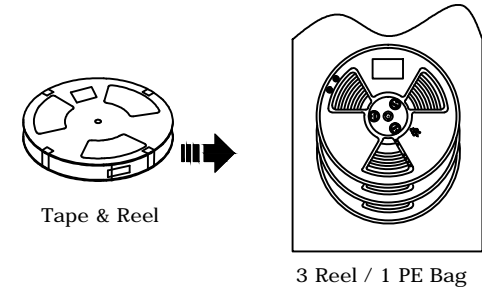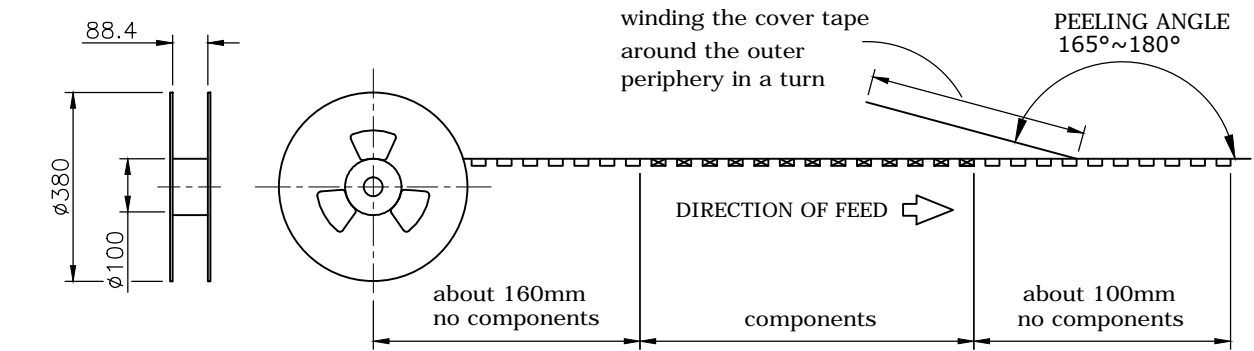

Carton L\*W\*H= 405\*405\*320

PART NO.	PCS/REEL	REEL/CARTON	PCS/CARTON
126A-40A00	500	3	1500
126A-40A10	500	3	1500

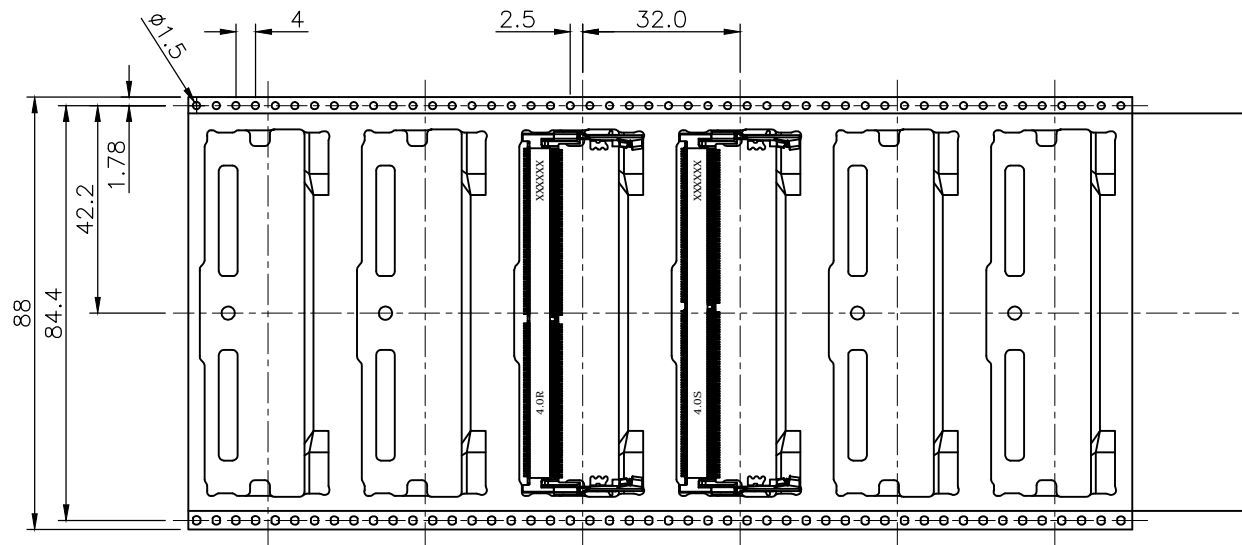

UNLESS OTHERWISE SPECIFIED TOLERANCE

UNIT:	DECIMAL	LINEAR	ANGLES
mm	X.	±0.50	±5°
	X.X	±0.25	±3°
	X.XX	±0.12	±1°



www.attend.com.tw

DRAWN	Fros	2021/03/23	DRAWN NAME:
CHECKED	Tim	2021/03/23	Packaging for DDR5 SODIMM Socket, Horizontal, 4.OH, Reel 88.0mm
APPROVED	Ken	2021/03/23	PRODUCT NO. SEE TABLE
⊕	SCALE N/A	SHEET 1/1	SIZE A4
			FILE NAME 126A-40AX0_D_1