




Female Header 2.54mm 1 & 2 & 3 Row H=8.5mm Pin 0.64x0.60 Elevated Type

Specifications

Current Rate: 3 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Dielectric Voltage: 1000V AC for one minute
 Operation Temperature: -40°C to +105°C


Material

Insulator: P.B.T or Hi-Temp. Thermoplastic, UL 94V-0
 Terminal: Copper Alloy
 Standard Plating: Gold Flash

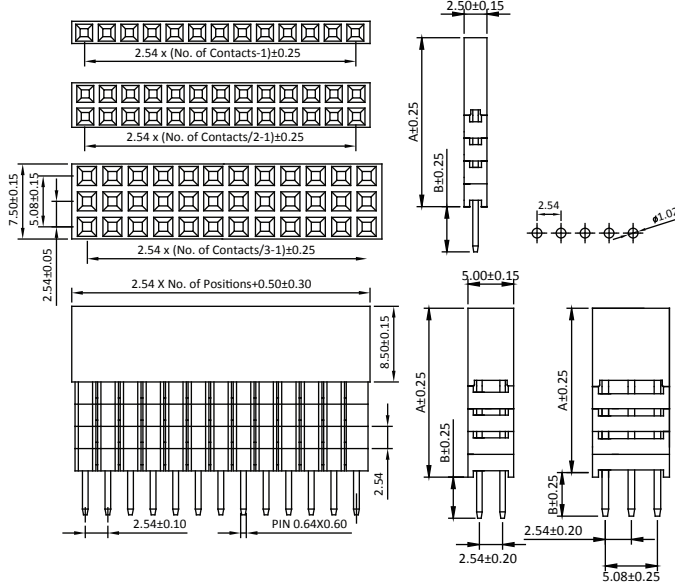


Table


	Dim. A	Dim. B
1B	11.05	7.35
1C	11.05	12.2
1D	11.05	2.30
2A	13.59	4.85
2B	13.59	9.65
3A	16.13	2.30
3B	16.13	7.10
4A	18.67	4.60




P/N.: 5PS1AEA85-1XX




P/N.: 5PS1AEA85-2XX



P/N.: 5PS1AEA85-3XX




Female Header 2.54mm 1 & 2 Row H=8.5mm Elevated Press Fit Type



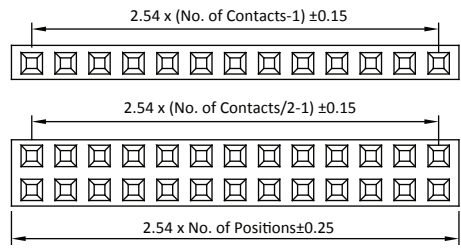


Table

	Dim. A	Dim. B
1A	11.05	3.20
2A	13.59	3.20
3A	16.13	3.20
4A	18.67	3.20



P/N.: 5PS1FEA85-1XX

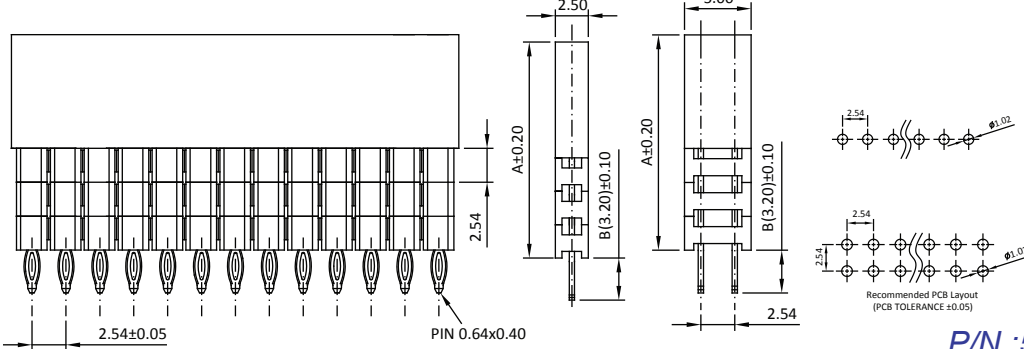

P/N.: 5PS1FEA85-XX2

ORDER INFORMATION

5 P S 1 X X A 8 5 - X X X X 5 X X X

- 5: Plastic Height 85: H=8.5mm
- P: AE: Multi layers/DIP; FE: Press Fit
- S: 1: Single Row; 2: Dual Row; 3: Triple Row
- 1: No. of Contact Per Row (02~40)
- X: A: Tray without CAP; T: Tube without CAP
- 5: U: RoHS Hi-Temp.; L: RoHS + PBT
- X: See Table Ex: 110073; 1B: Type; A: 11.05(110); B: 7.35(073)

◎G0: Gold Flash	S0: Selective
GA: Gold 5u"	SA: Selective 5u"
GB: Gold 10u"	SB: Selective 10u"
GC: Gold 20u"	SC: Selective 20u"
GD: Gold 30u"	SD: Selective 30u"
T0: Tin Plated	
TE: Tin 200u"	

◎: Standard Recommend
 Tube package is not available for under 1*5 & 2*5 pin counts

Old P/N: PS1E-1/2/3
 PS1FE-1/2

Female Header 2.54mm

RoHS