

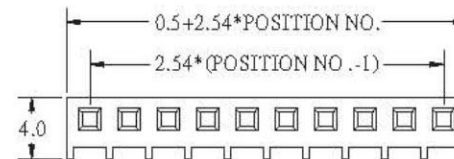




C2810-XXBSGH00R




C2810-XXASGH00R

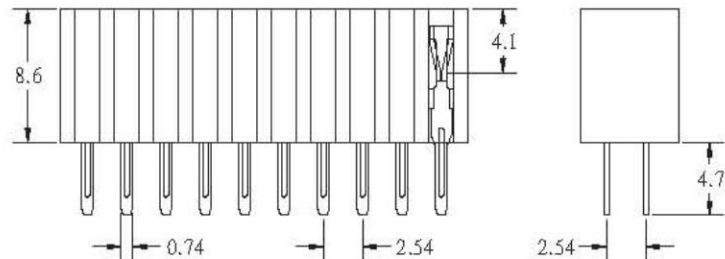

RECOMMENDED P.C.B LAYOUT

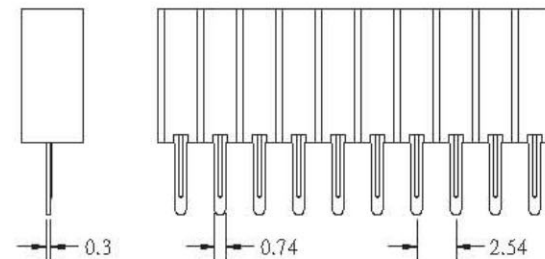

RECOMMENDED P.C.B LAYOUT

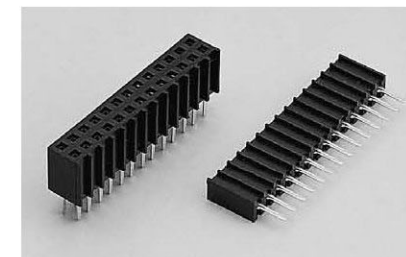

SPECIFICATIONS

Material

Insulator : PBT, glass reinforced, rated UL 94V-0
 Contact : Brass

Electrical

Current Rating : 1 Amp
 Contact Resistance : 30 mΩ max.
 Insulation Resistance : 3000 MΩ min.
 Dielectric Withstanding Voltage : 500V AC for 1minute
 Operating Temperature : -40°C to +105°C

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 HELEN		TOLERANCE 容許公差 0 ± .00 ± ANG ±	PART NAME 品名 2.54mm WAVY FEMALE HEADER H:8.6mm 2X??P STRAIGHT PIN LENGTH=4.7mm ROHS
DWG. 製圖 ABBY	SCALE 比例 參考	UNIT 單位 MM	PART NO. 料號 C2810-XXXSXH00R
DATE 制表日 2011/07/26	PAGE 張數 1 OF 1	REV. 版本 A	