

ORDER INFORMATION



SPECIFICATIONS

Current Rating: 3 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Dielectric Voltage: 500V AC for one minute
 Operation Temperature: -40°C to +105°C




MATERIAL

Insulator: Hi-Temp. Thermoplastic, UL94V-0, Black
 Contact Pin: Copper Alloy

5 P S 1 M S B 7 1 - 2 X X X X N X N X U - 0 0

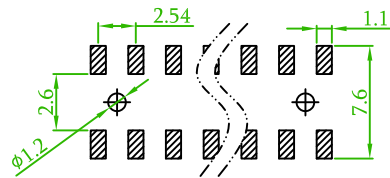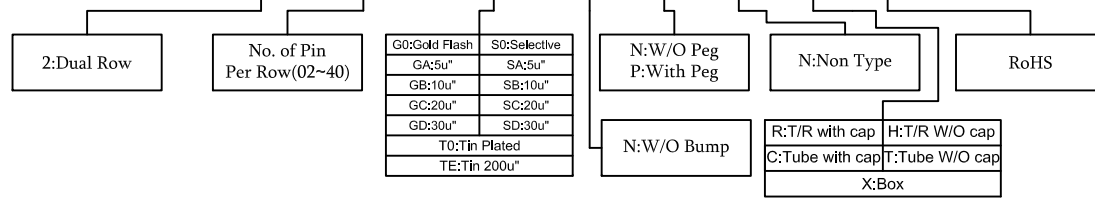

Recommended P.C.B Layout
 (PCB BOARD TOLERANCE±0.1)

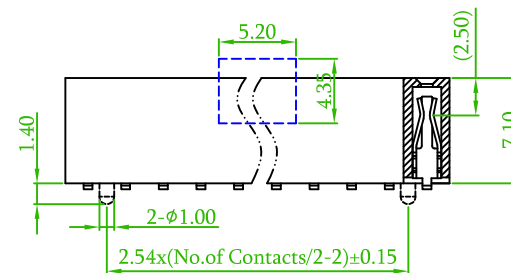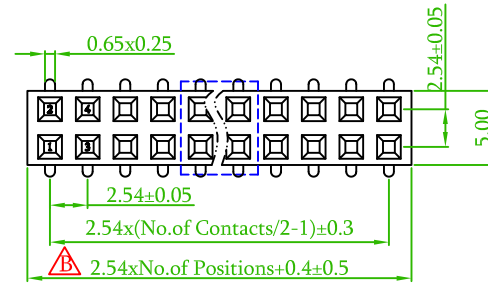

Old Part No. : PS1M71-2XX-U

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
	ECR No.:170641	B	2017/07/05 Roy

糧德精密有限公司
 Amtek Technology Co., Ltd.
 TEL: 886-2-2260-6878
 FAX: 886-2-2260-8030

品名 TITLE	FEMALE HEADER 2.54mm				頁數 Page	1/1
品號 PART NO.	5PS1MSB71-2XXXXNXNXU-00				繪圖 DRAWN	Sinnys 2010/10/21
圖號 DRAWING NO.	GN005-RL220		版本 REV.	B	核對 CHECKED	Kelvin 2010/10/21
客戶品號 CUSTOMER P/N			比例 SCALE	None	承認 APPROVED	James 2010/10/21
公差 TOLERANCE	.X ±0.38	.XX ±0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION	