




1 2 3 4 5 6 7 8 9

SPECIFICATIONS

Rated Current:3.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 5 seconds)

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

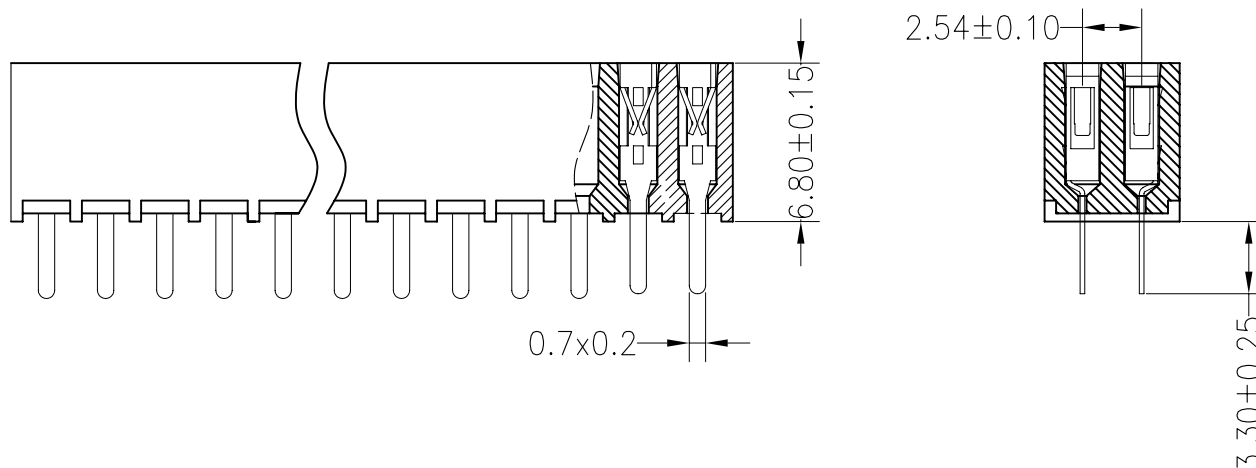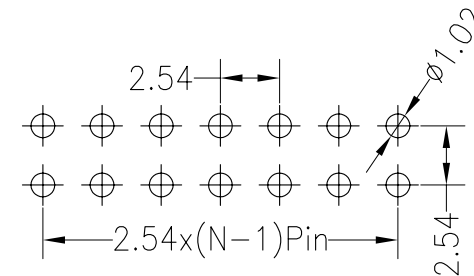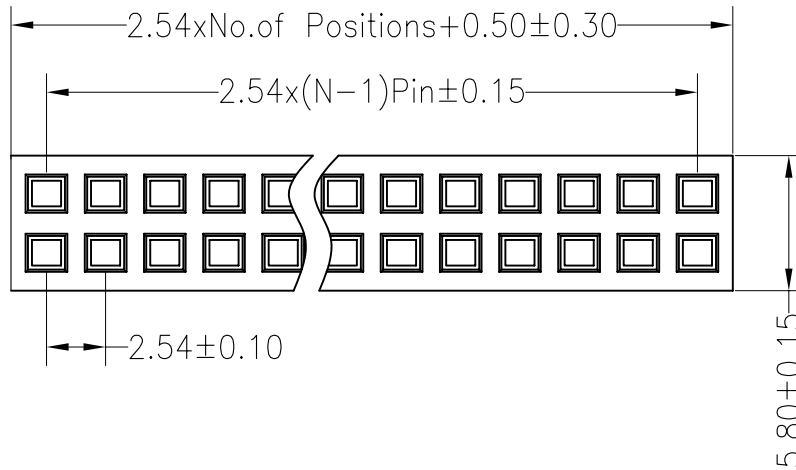

				OPERATION		DRAW	YiYuSheng	15.04.28	SCALE	FIT	NINGBO KLS ELECTRONIC CO.,LTD	
				X.X	±0.30				UNIT	mm		
				X.XX	±0.20	CHECK			SIZE	A4	PART NO.	L-KLS1-208Y-6.8-2-XX-S
				X.XXX	±0.10				SHEET	1/1		
AO	2015.04.28	NEW DRAWING		Angle	±3°	APPROVE			PROJ.	◆	TITLE:	2.54PF 2xNPin H6.8 W5.8 180°
REV	DATE	MODIFICATION DESCRIPTION		DIM	TOL							

1 2 3 4 5 6 7 8 9