

SPECIFICATION




Current Rating: 3 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Dielectric Voltage: 500V AC for one minute
 Operation Temperature: -40°C to +105°C

MATERIAL

Insulator: Hi-Temp. Thermoplastic, UL94V-0, Black
 Contact Pin: Copper Alloy

ORDER INFORMATION

5PH1RU A 25 - 1 XX XX N N X U - A B C - 0 0

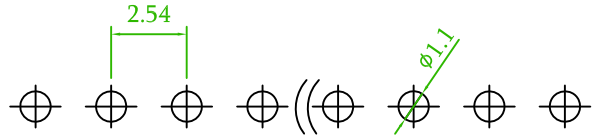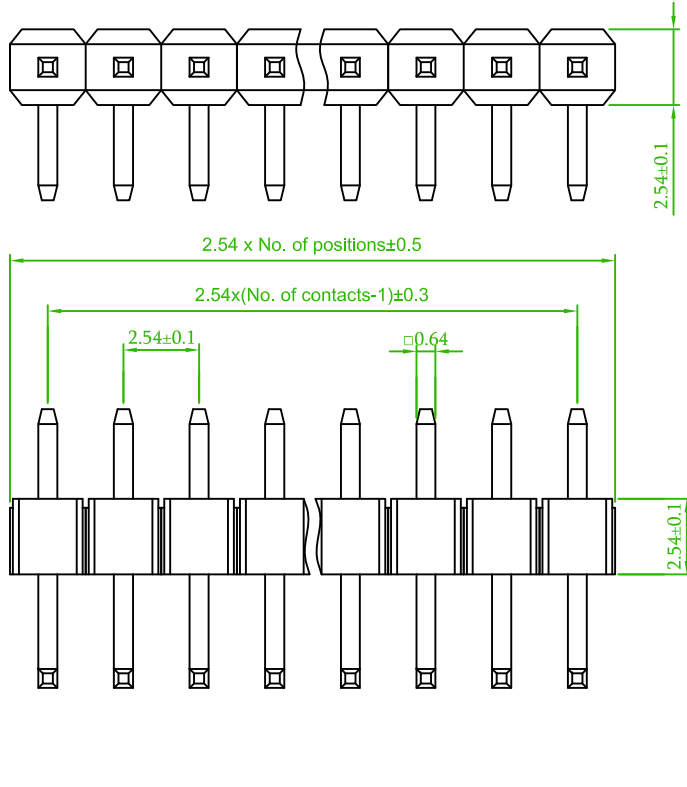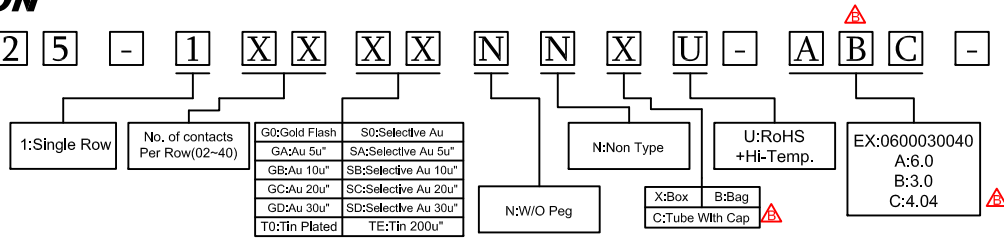

Recommended PCB Layout
 (PCB TOLERANCE ±0.1)

Old Part No. :PH1RU25-1XX-U

REV.	Modify order information	B	2017/01/25 Gary
	ECN NO. OR DESCRIPTION	REVISED	DATE

糧德精密有限公司
 Amtek Technology Co., Ltd.
 TEL: 886-2-2260-6878
 FAX: 886-2-2260-8030

品名 TITLE	PIN HEADER 2,54mm S/R R/A DIP TYPE				頁數 Page	1/1
品號 PART NO.	5PH1RU A 25 - 1 XXXX N N X U -XXXXXXXXXX-00			繪圖 DRAWN	Mia 2015/08/24	
圖號 DRAWING NO.	GN016-GA159	版本 REV.	B	核對 CHECKED	John 2015/08/24	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/08/24	
公差 TOLERANCE	.X ± 0.35 .XX ± 0.25	.X° ± 3	單位 UNIT	mm	THIRD ANGLE PROJECTION	