

**SPECIFICATIONS**




Current Rating: 3 AMP  
 Insulation Resistance: 1000MΩ Min.  
 Contact Resistance: 20mΩ Max.  
 Dielectric Voltage: 500V AC for one minute  
 Operation Temperature: -40°C to +105°C

**MATERIAL**



Insulator: Hi-Temp. Thermoplastic, UL94V-0, Black  
 Contact Pin: Copper Alloy

**ORDER INFORMATION**

5 P H 1 S D A 1 5 - 2 X X X X N N X U - A B 000 - 0 0

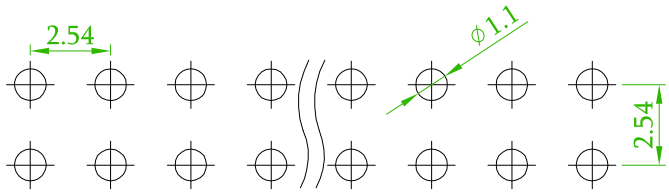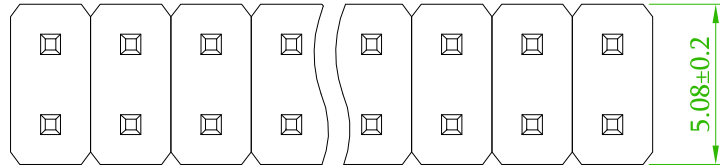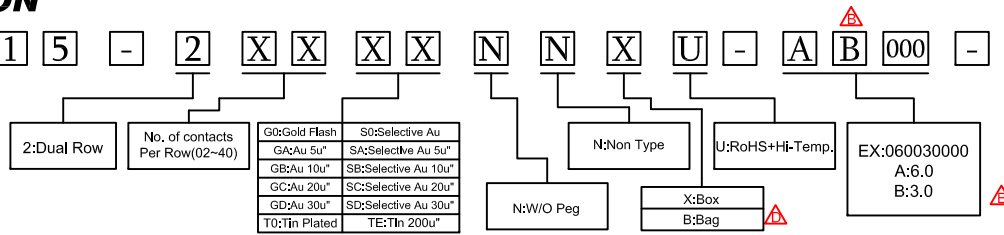

Recommended PCB Layout  
 (PCB TOLERANCE ±0.1)

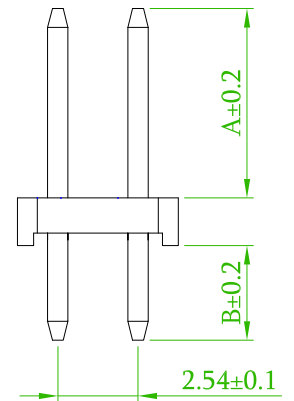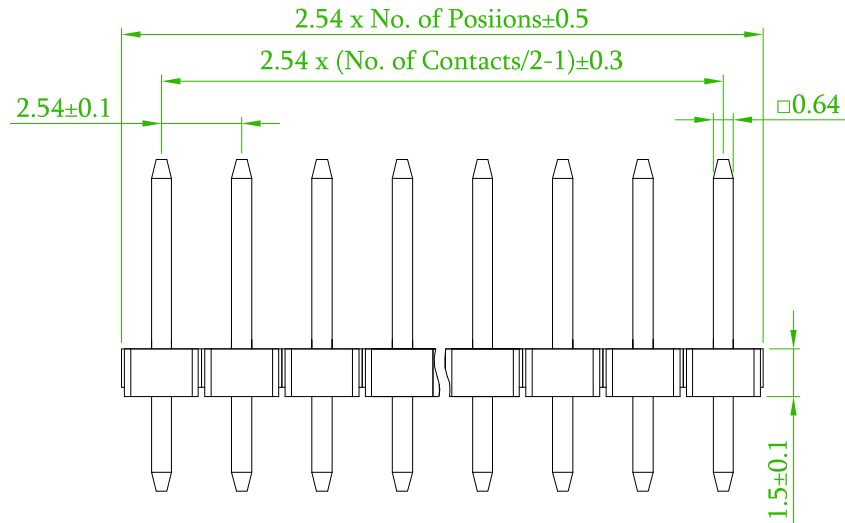

Old Part No. :PH1S15-2XX-U

△	ECN No.:180310,Remove the Cap & Revise the Package option .	Roy	2018/03/22
△	ECN No.:171201, Revise the Cap.	Andy	2017/12/01
△	Modify order information	Gary	2017/01/25
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

TEL: 886-2-2260-6878  
 FAX: 886-2-2260-8030

品名 TITLE	PIN HEADER 2.54mm D/R V/T DIP TYPE				頁數 Page	1/1
品號 PART NO.	5PH1SDA15-2XXXXNXXU -XXXXXX000-00				繪圖 DRAWN	Joey 2016/08/25
圖號 DRAWING NO.	GN016-GA165	版本 REV.	D	核對 CHECKED	Josh 2018/03/22	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/03/22	
公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		