


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 03/15/08'	~	LJC 03/15/08'
B	ADD P/N CODE	LJC 12/09/13'		

N=NUMBER OF CONTACT

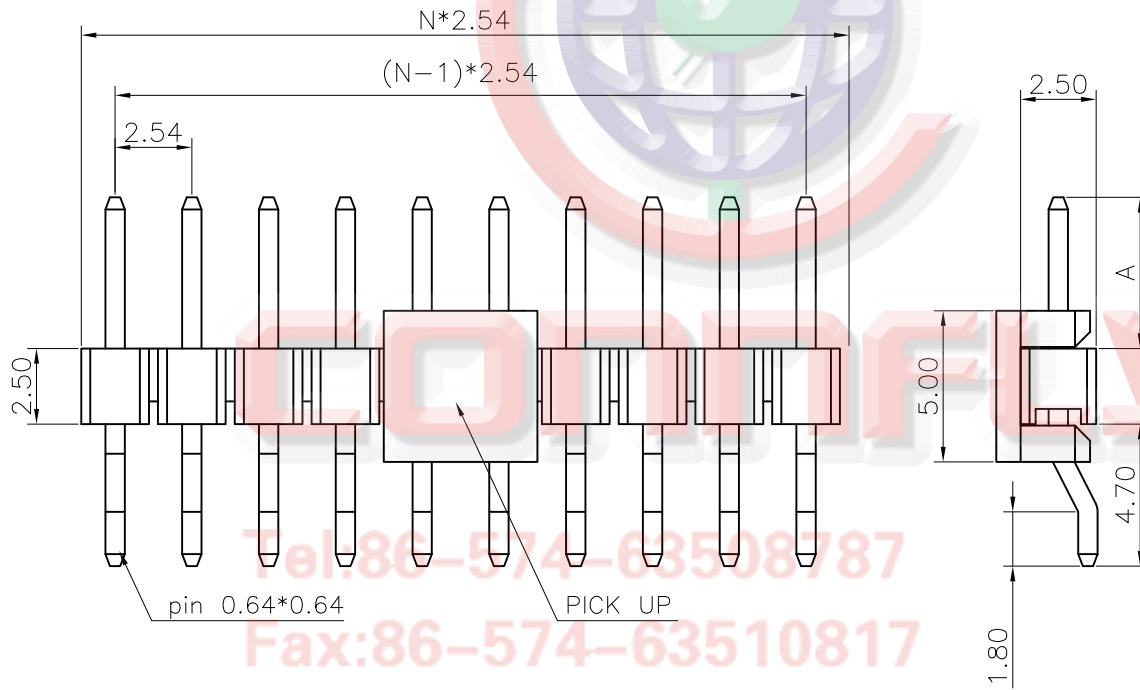

NOTES:

- MATERIAL
 - INSULATOR:THERMOPLASTIC(UL 94V-0).
 - CONTACT MATERIAL: COPPER ALLOY.
- SPECIFICATION
 - CURRENT RATING:1.5 A.
 - INSULATION RESISTANCE:1000MΩ Min.
 - DIELECTRIC WITHSTANDING:500VAC.
 - CONTACT RESISTANCE:20mΩ Max.
 - TEMPERATURE RANGE:-40°C TO +105°C.

3. PRODUCT NUMBER CODE:

DS1022-07 - X X X X X X - X

PLATING LEVEL(FOR GOLD ONLY)Ⓟ
 3A: 0.8-1.2u" B: LEVEL B

PACKING TYPE
 T:TRAY
 R:TAPE ON REEL
 B:TUBE

PICK UP SUPPORT
 S:W/ PICK UP
 X:W/O PICK UP


Dim A type

- 1: 3.20
- 2: 6.00
- 3: _____
- 4: _____
- 5: _____

CONTACTS TYPE
 8: Full gold flash
 6: Full Tin

MOUNTING TYPE
 S: SMT TYPE

No.OF CONTACTS
 1*2-1*40

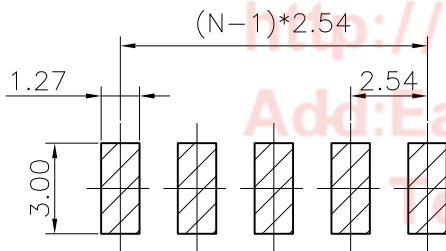

Tel:86-574-63508787

Fax:86-574-63510817

E-mail:sale@connfly.com

http://www.connfly.com

Address:East Industry Zone KuangYan

Town Cixi Ningbo China

P.C:315333

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1022-07-XXXXX-X-B		

PROJECTION		TITLE	2.54mm PIN HEADER
UNITS	mm	SINGLE ROW SMT TYPE W/O POST	
SHEET SIZE	A4	SERIES	DS1022-07 SERIES

晨翔电子有限公司
CONNFLY® CONNFLY ELECTRONIC CO., LTD